

## FEATURES

- Wide Supply Voltage Range: 6...35V
- Wide Operating Temperature Range: -40°C...+85°C
- High Detection Sensitivity of Relative Capacitive Changes: 5% – 100%
- Detection Frequency up to 2kHz
- Adjustable Voltage Range: 0...5/10V, other
- Reference Voltage Source: 5V
- Protection against Reverse Polarity
- Output Current Limitation
- Adjustable with only two Resistors

## APPLICATIONS

- Industrial Process Control
- Distance Measurement
- Pressure Measurement
- Humidity Measurement
- Level Control

## GENERAL DESCRIPTION

The CAV414 is an universal multipurpose interface for capacitive sensors and contains the complete signal processing unit on chip. The CAV414 detects the relative capacitive change of a measuring capacity to a fixed reference capacity. The IC is optimised for capacities in the wide range of 10pF to 2nF with possible changes of capacity of 5% to 100% of the reference capacity.

The voltage output is formed by a high accuracy instrumentation amplifier in combination with an operational amplifier.

With only a few external components, the CAV414 is suitable for a great variety of applications including a zero compensation.

## DELIVERY

- DIL16 packages (samples)
- SO16(n) packages
- Dice on 5" blue foil

## BLOCK DIAGRAM

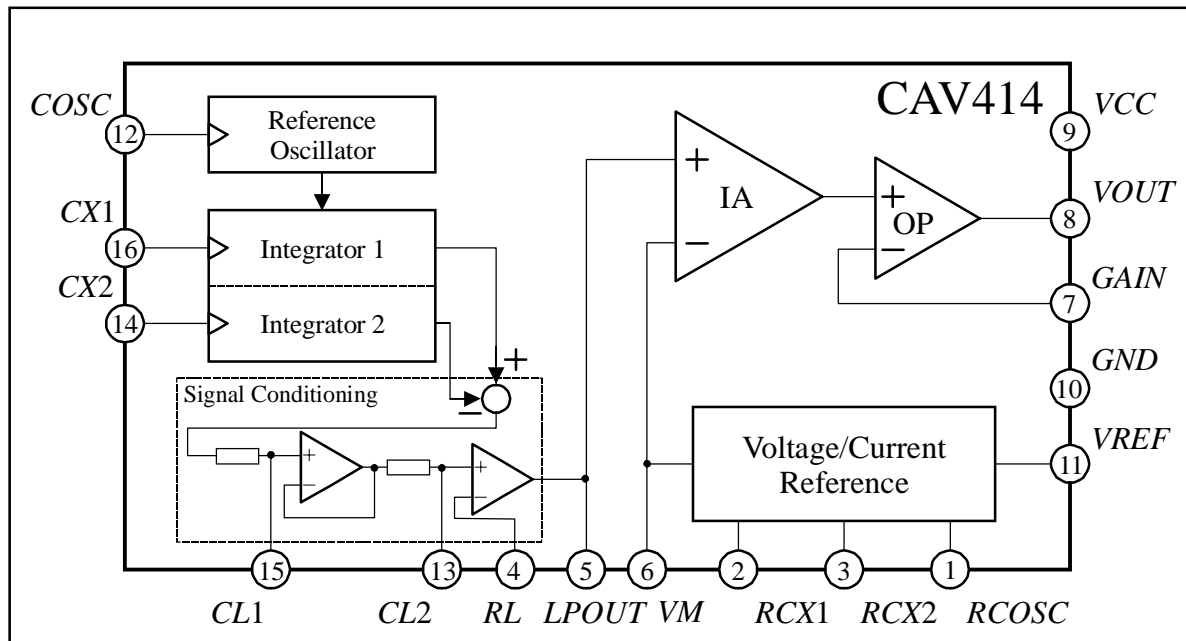


Figure 1

# Converter IC for Capacitive Signals CAV414

## ELECTRICAL SPECIFICATIONS

$T_{amb} = 25^{\circ}\text{C}$ ,  $V_{CC} = 24\text{V}$ ,  $I_{REF} = 1\text{mA}$  (unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Supply</b>						
Supply Voltage	$V_{CC}$		6		35	V
Quiescent Current	$I_{CC}$	$T_{amb} = -40 \dots 85^{\circ}\text{C}$ , $I_{REF} = 0\text{mA}$		1.55	2.7	mA
<b>Temperature Specifications</b>						
Operating	$T_{amb}$		-40		85	$^{\circ}\text{C}$
Storage	$T_{st}$		-55		125	$^{\circ}\text{C}$
Junction	$T_j$				150	$^{\circ}\text{C}$
Thermal Resistance	$\Theta_{ja}$	DIL16 plastic package		70		$^{\circ}\text{C}/\text{W}$
	$\Theta_{ja}$	SO16 (n) plastic package		140		$^{\circ}\text{C}/\text{W}$
<b>Reference Oscillator</b>						
Oscillator Capacitor Range	$C_{OSC}$	$C_{OSC} = 1.6 \cdot C_{X1}$	14		1800	pF
Oscillator Frequency Range	$f_{OSC}$		1		130	kHz
Oscillator Current	$I_{OSC}$	$R_{OSC} = 200\text{k}\Omega$	9.5	10	10.75	$\mu\text{A}$
<b>Capacitive Integrator 1 and 2</b>						
Capacitor Range 1	$C_{X1}$		10		1000	pF
Capacitive Integrator Current 1	$I_{X1}$	$R_{CX1} = 400\text{k}\Omega$	4.75	5	5.38	$\mu\text{A}$
Capacitor Detection Sensitivity	$\Delta C_X$	$\Delta C_X = (C_{X2} - C_{X1})/C_{X1}$	5		100	%
Capacitor Range 2	$C_{X2}$	$C_{X2} = C_{X1} \cdot (1 + \Delta C_X)$	10.5		2000	pF
Capacitive Integrator Current 2	$I_{X2}$	$R_{CX2} = 400\text{k}\Omega$	4.75	5	5.38	$\mu\text{A}$
Detection Frequency	$f_{DET}$	$C_{L1} = C_{L2} = 1\text{nF}$			2	kHz
<b>Lowpass</b>						
Adjustable Gain	$G_{LP}$		1		10	
Output Voltage	$V_{LPOUT}$		$V_M - 0.4$		$V_M + 0.4$	V
Corner Frequency 1	$f_{C1}$	$R_{01} = 20\text{k}\Omega$ , $C_{L1} = 1\text{nF}$			10	kHz
Corner Frequency 2	$f_{C2}$	$R_{02} = 20\text{k}\Omega$ , $C_{L2} = 1\text{nF}$			10	kHz
Resistive Load at PIN $LPOUT$	$R_{LOAD}$		200			k $\Omega$
Capacitive Load at PIN $LPOUT$	$C_{LOAD}$				50	pF
Temperature Coefficient $V_{DIFF}$ (together with Input Stages)	$dV_{DIFF}/dT$	$V_{DIFF} = V_{LPOUT} - V_M$ , $T_{amb} = -40 \dots 85^{\circ}\text{C}$		$\pm 100$		ppm/ $^{\circ}\text{C}$
Internal Resistor 1 and 2	$R_{01}$ , $R_{02}$			20		k $\Omega$
Temperature Coefficient $R_{01,02}$	$dR_{01,02}/dT$	$T_{amb} = -40 \dots 85^{\circ}\text{C}$		1.9		$10^{-3}/^{\circ}\text{C}$
Power Supply Rejection Ratio (together with Input Stages)	$PSRR$	$I_{OUT} \leq 1\text{mA}$	80	90		dB
<b>Voltage Reference <math>V_{REF}</math></b>						
Voltage	$V_{REF}$		4.75	5	5.25	V
Current	$I_{REF}$		0		9	mA
$V_{REF}$ vs. Temperature	$dV_{REF}/dT$	$T_{amb} = -40 \dots +85^{\circ}\text{C}$		$\pm 90$	$\pm 140$	ppm/ $^{\circ}\text{C}$
Line Regulation	$dV_{REF}/dV$	$V_{CC} = 6\text{V} \dots 35\text{V}$		30	80	ppm/V
	$dV_{REF}/dV$	$V_{CC} = 6\text{V} \dots 35\text{V}$ , $I_{REF} \approx 4\text{mA}$		60	150	ppm/V
Load Regulation	$dV_{REF}/dI$			0.05	0.10	%/mA
	$dV_{REF}/dI$	$I_{REF} \approx 4\text{mA}$		0.06	0.15	%/mA
Load Capacitance	$C_{REF}$		1.9	2.2	5.0	$\mu\text{F}$

# Converter IC for Capacitive Signals CAV414

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<b>Voltage Reference <math>V_M</math></b>						
Voltage	$V_M$		1.90	2	2.15	V
$V_M$ vs. Temperature	$dV_M/dT$	$T_{amb} = -40...+85^\circ\text{C}$		$\pm 90$		ppm/ $^\circ\text{C}$
Current	$I_{VM}$	Source			5	$\mu\text{A}$
	$I_{VM}$	Sink			-5	$\mu\text{A}$
Load Capacitance	$C_{VM}$		80	100	120	nF
<b>Instrumentation Amplifier Input Stage</b>						
Internal Gain	$G_{IA}$		4.9	5	5.1	
Differential Range	$V_{IN}$		0		400	mV
Common Mode Input Range	$CMIR$	$V_{CC} < 9\text{V}, I_{CV} < 2\text{mA}$	1.5		$V_{CC} - 3$	V
	$CMIR$	$V_{CC} \geq 9\text{V}, I_{CV} < 2\text{mA}$	1.5		6.0	V
Common Mode Rejection Ratio	$CMRR$		80	90		dB
Power Supply Rejection Ratio	$PSRR$	$I_{OUT} \leq 1\text{mA}$	80	90		dB
Offset Voltage	$V_{OS}$			$\pm 1.5$	$\pm 6$	mV
$V_{OS}$ vs. Temperature	$dV_{OS}/dT$			$\pm 5$		$\mu\text{V}/^\circ\text{C}$
<b>Output Stage</b>						
Adjustable Gain	$G_{OP}$		1			
Input Range	$IR$	$V_{CC} < 11\text{V}$	0		$V_{CC} - 5$	V
	$IR$	$V_{CC} \geq 11\text{V}$	0		6	V
Power Supply Rejection Ratio	$PSRR$	$I_{OUT} \leq 1\text{mA}$	80	90		dB
Offset Voltage	$V_{OS}$			$\pm 0.5$	$\pm 2$	mV
$V_{OS}$ vs. Temperature	$dV_{OS}/dT$			$\pm 3$	$\pm 7$	$\mu\text{V}/^\circ\text{C}$
Input Bias Current	$I_B$			10	25	nA
$I_B$ vs. Temperature	$dI_B/dT$			7	20	pA/ $^\circ\text{C}$
Output Voltage Range	$V_{OUT}$	$V_{CC} < 19\text{V}$	0		$V_{CC} - 5$	V
	$V_{OUT}$	$V_{CC} \geq 19\text{V}$	0		14	V
Output Current Limitation	$I_{LIM}$	$V_{CC} \geq 10\text{V}$	5	7	10	mA
Output Current	$I_{OUT}$		0		$I_{LIM}$	mA
Load Resistance	$R_L$		2			k $\Omega$
Load Capacitance	$C_L$				500	nF
<b>Protection Functions</b>						
Protection Against Reverse Polarity		Ground vs. $V_{CC}$ vs. $V_{OUT}$			35	V

## Note:

- 1) The oscillator capacity has to be chosen in the following way:  $C_{OSC} = 1.6 \cdot C_{X1}$
- 2) The capacitor range of  $C_{X1}$  and  $C_{X2}$  can be extended whereby the system performance is reduced and the electrical limits are exceeded.
- 3) Currents flowing into the IC, are negative.

## BOUNDARY CONDITIONS

Parameter	Symbol	Min.	Typ.	Max.	Unit
Current Definition of Ref. Oscillator	$R_{OSC}$	190	200	210	$k\Omega$
Current Adjustment of Cap. Integrator 1	$R_{CX1}$	350	400	450	$k\Omega$
Current Adjustment of Cap. Integrator 2	$R_{CX2}$	350	400	450	$k\Omega$
Lowpass Stage Resistor Sum	$R_{L1} + R_{L2}$	90		200	$k\Omega$
Output Stage Resistor Sum	$R_1 + R_2$	90		200	$k\Omega$
Reference Voltage 5V	$C_{REF}$	1.9	2.2	5	$\mu F$
Reference Voltage 2V (only for internal use)	$C_{VM}$	80	100	120	nF
Lowpass Capacitance 1	$C_{L1}$	$100 \cdot C_{X1}$	$200 \cdot C_{X1}$		
Lowpass Capacitance 2	$C_{L2}$	$100 \cdot C_{X1}$	$200 \cdot C_{X1}$		
Oscillator Capacitance	$C_{OSC}$	$C_{OSC} = 1.55 \cdot C_{X1}$	$C_{OSC} = 1.60 \cdot C_{X1}$	$C_{OSC} = 1.65 \cdot C_{X1}$	

**Note:** The system performance over temperature forces that the resistors  $R_{CX1}$ ,  $R_{CX2}$  and  $R_{OSC}$  have the same temperature coefficient and a very close placement of them in the circuit. The capacities  $C_{X1}$ ,  $C_{X2}$  and  $C_{OSC}$  are also forced to have the same temperature coefficient and a very close placement of them in the circuit.

## FUNCTIONAL DIAGRAM

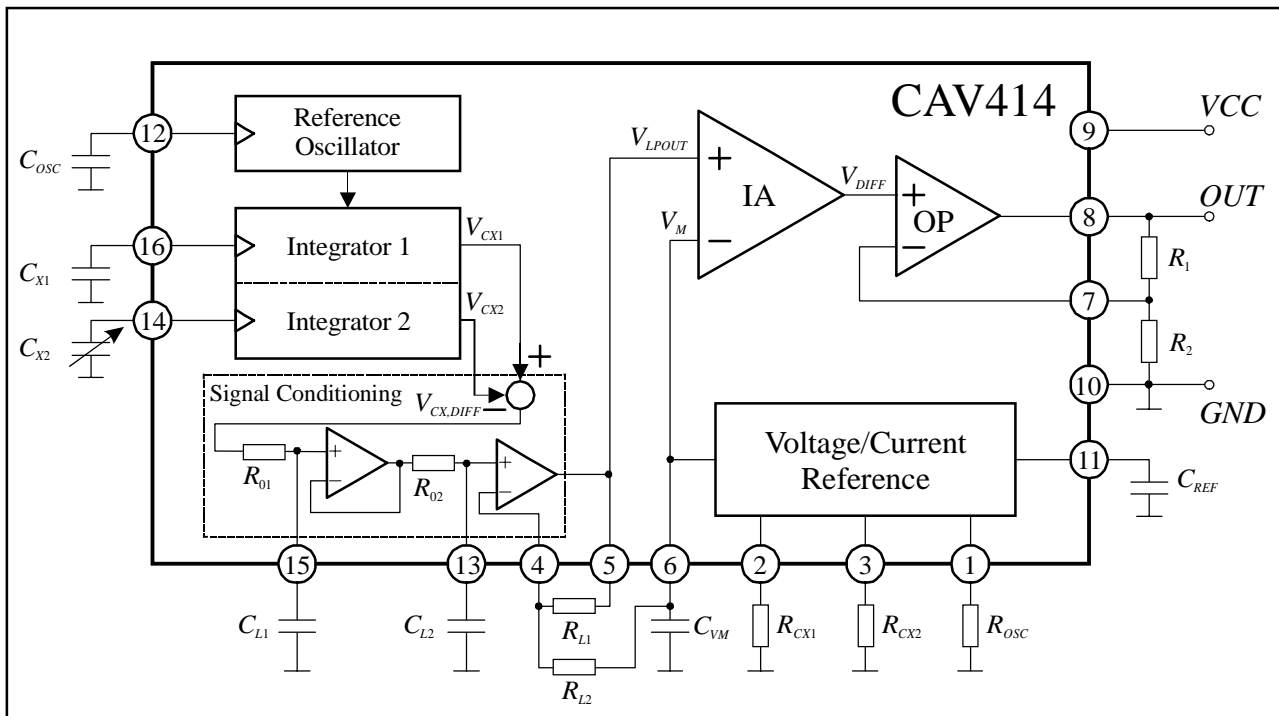


Figure 2

## FUNCTIONAL DESCRIPTION

A reference oscillator with a frequency adjusted by the capacity  $C_{OSC}$  drives two symmetrically built integrators synchronously to its clock and its phase. The capacitors  $C_{X1}$  and  $C_{X2}$  determine the amplitude of the two driven integrators. The difference of the integrator amplitudes gives the relative change of the capacities  $C_{X1}$  and  $C_{X2}$  to each other with high common mode rejection and high resolution. The difference signal is conditioned by a lowpass filter. The corner frequency and gain of it can be adjusted with a few external components. The output of the lowpass filter is connected to an instrumentation amplifier and an output stage. These two stages transform the signal into an adjustable voltage.

### **Adjustment:**

The zero-adjustment is made by the resistors  $R_{CX1}$  or  $R_{CX2}$  for the case that the varying capacitance  $C_{X2}$  has nearly the same (and its smallest) value as the fixed capacitance  $C_{X1}$  (reference capacitance). Therefore one of this resistors is varied until the differential voltage

$$V_{DIFF} = V_{LPOUT} - V_M$$

is zero:

$$V_{DIFF} = 0$$

### **Application Example:**

The following values are given:

- fixed capacitance  $C_{X1}$ : 50pF
- varying capacitance  $C_{X2}$ : 50 ... 100pF

### **Calculation:**

With the equations given in the boundary conditions, the following values for the devices can be calculated:

- $C_{OSC}$ : 80pF
- $C_{L1}$ : 10nF
- $C_{L2}$ : 10nF

If the signal  $V_{DIFF}$  is amplified, it has to fulfil the unequation:

$$V_{DIFF} \leq 400\text{mV}$$

**Detailed calculations are shown in a separately available *Application Note*.**

## PINOUT

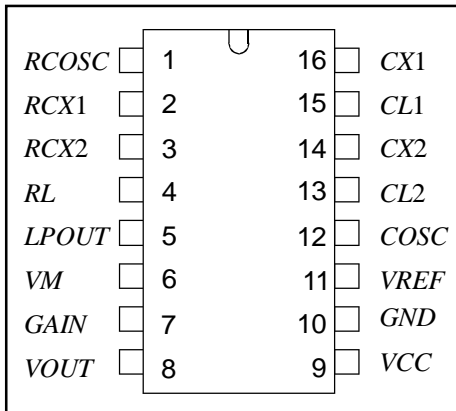


Figure 3

PIN	NAME	DESIGNATION
1	RCOSC	Current Definition of Ref. Oscillator
2	RCX1	Current Adjustment of Cap. Integrator 1
3	RCX2	Current Adjustment of Cap. Integrator 2
4	RL	Gain Adjustment of Lowpass Filter
5	LPOUT	Output of Lowpass Filter
6	VM	Reference Voltage 2V
7	GAIN	Gain Adjustment
8	VOUT	Voltage Output
9	VCC	Supply Voltage
10	GND	IC Ground
11	VREF	Reference Voltage 5V
12	COSC	Capacitor of Reference Oscillator
13	CL2	Corner Frequency of Lowpass 2
14	CX2	Integrator Capacitor 2
15	CL1	Corner Frequency of Lowpass 1
16	CX1	Integrator Capacitor 1

## DELIVERY

The CAV414 is available in version:

- 16-Pin-DIL (samples)
- SO 16 (n) (Maximum Power Dissipation  $P_D = 300\text{mW}$ )
- Dice on 5" blue foil

## PACKAGE DIMENSIONS SO16 (n)

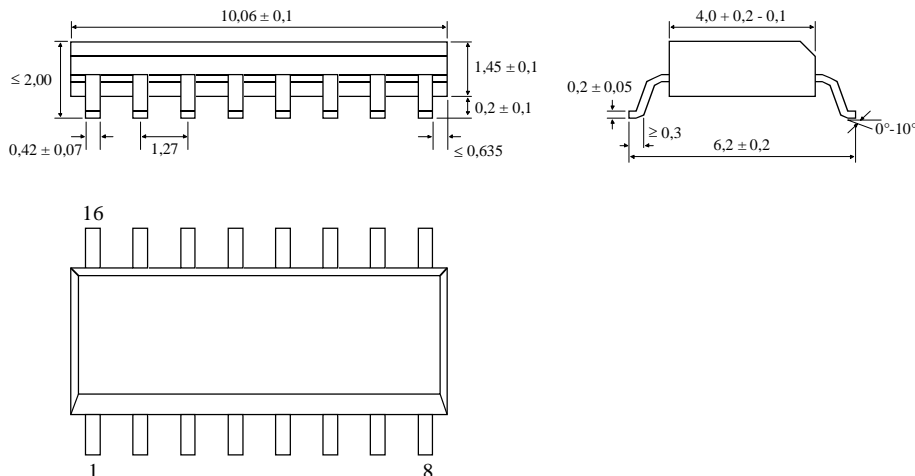


Figure 4

The information provided herein is believed to be reliable; however, Analog Microelectronics assumes no responsibility for inaccuracies or omissions. Analog Microelectronics assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licences to any of the circuits described herein are implied or granted to any third party. Analog Microelectronics does not authorise or warrant any Analog Microelectronics product use in life support devices and/or systems.