



Design Example Report

Title	<i>10 W Power Supply using DPA423P</i>
Specification	Input: 37-57 VDC Output: 3.3V/2.0A, 5V/200mA, 12V/200mA
Application	VoIP phone
Author	Power Integrations Applications Department
Document Number	DER-96
Date	September 12, 2005
Revision	1.0

Summary and Features

This document is an engineering prototype report describing a VoIP power supply utilizing DPA423P.

- Eliminates LM78xx linear-regulators on 5 V
- Low-cost 12 V linear-reg. with short circuit protection provided by main supply
- High Efficiency (> 70% at 48 VDC)
- Low EMI signature (both radiated and conducted emissions)
- Low Parts Count
- Built-in input short circuit protection on all outputs
- Carefully designed for low EMI

The products and applications illustrated herein (including circuits external to the products and transformer construction) may be covered by one or more U.S. and foreign patents or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at www.powerint.com.

Table Of Contents

1	Introduction.....	4
2	Power Supply Specification.....	5
3	Schematic.....	6
4	Circuit Operation	7
4.1	General	7
4.2	Description	7
5	BOM	Error! Bookmark not defined.
6	Layout.....	11
7	Transformer Design Spreadsheet	12
8	Transformer Specification.....	14
8.1	Transformer Winding.....	14
8.2	Electrical Specifications.....	14
8.3	Materials.....	14
8.4	Transformer Build Diagram	15
8.5	Transformer Construction.....	15
8.5.1	WD#3 Copper Foil build diagram:	16
9	Inductor Specification	17
9.1	Inductor Winding	17
9.2	Electrical Specifications.....	17
9.3	Materials.....	17
9.4	Inductor Footprint Diagram.....	18
9.5	Inductor Construction	18
10	Performance	19
10.1	Efficiency.....	19
10.2	Regulation vs. Load.....	20
10.3	Regulation vs. Load.....	21
10.4	Raw Performance Data	22
10.5	Thermal Performance.....	24
11	Waveforms.....	25
11.1	Drain Current and Voltage.....	25
11.2	Output Transient Load Response	26
11.3	Output Ripple Voltage	27
11.4	Output Voltage Start-up Profile	28
12	Conducted EMI	30
12.1	230V High Line EMI	30
13	Radiated EMI scans.....	31
14	Revision History.....	32



Important Notes:

Although this board is designed to satisfy safety isolation requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using an isolated source to provide power to the prototype board.

Design Reports contain a power supply design specification, schematic, bill of materials, and transformer documentation. Performance data and typical operation characteristics are included. Typically only a single prototype has been built.



1 Introduction

This document is an engineering prototype report describing a VoIP prototype power supply utilizing DPA423P. The power supply delivers 10 W continuous from an input of 37 to 57 VDC.

The design has been optimized to minimize radiated EMI emissions.

In the EMI section of the report it can be seen that there is a dramatic improvement in radiated EMI over the existing production DPA423 design.

This document provides complete design information including specification, schematic, bill of material and transformer design and construction information. The document also provides performance information.

2 Power Supply Specification

Description	Symbol	Min	Typ	Max	Units	Comment
Input						
Voltage	V_{IN}	37		57	VDC	
Under-Voltage	V_{IN_UV}		34		VDC	
Over-Voltage	V_{IN_OV}		N/A		VDC	
Output						
Output Voltage 1	V_{OUT1}	3.135	3.3	3.465	V	$\pm 5\%$
Output Ripple Voltage 1	$V_{RIPPLE1}$			100	mVp-p	20 MHz bandwidth
Output Current 1	I_{OUT1}	0		2	A	
Output Voltage 2	V_{OUT2}	4.75	5	5.25	V	$\pm 5\%$
Output Ripple Voltage 2	$V_{RIPPLE2}$			100	mVp-p	20 MHz bandwidth
Output Current 2	I_{OUT2}	0		200	mA	
Output Voltage 3	V_{OUT3}	11.4	12	12.6	V	$\pm 5\%$
Output Ripple Voltage 3	$V_{RIPPLE3}$			250	mVp-p	20 MHz bandwidth
Output Current 3	I_{OUT3}	0		200	mA	
Total Output Power						
Average Output Power	P_{OUT1}		6.6		W	
Average Output Power	P_{OUT2}		1		W	
Average Output Power	P_{OUT2}		2.4		W	
Average Output Power	P_{OUT_TOTAL}		10		W	
Average Output Power	P_{OUT_FAULT}				W	
Full Load Efficiency	η		70		%	
Environmental						
Conducted EMI				Meets CISPR22B / EN55022B		
Safety				Designed to meet IEC950, UL1950 Class II		
Ambient Temperature	T_{AMB}	0		40	°C	Forced airflow



3 Schematic

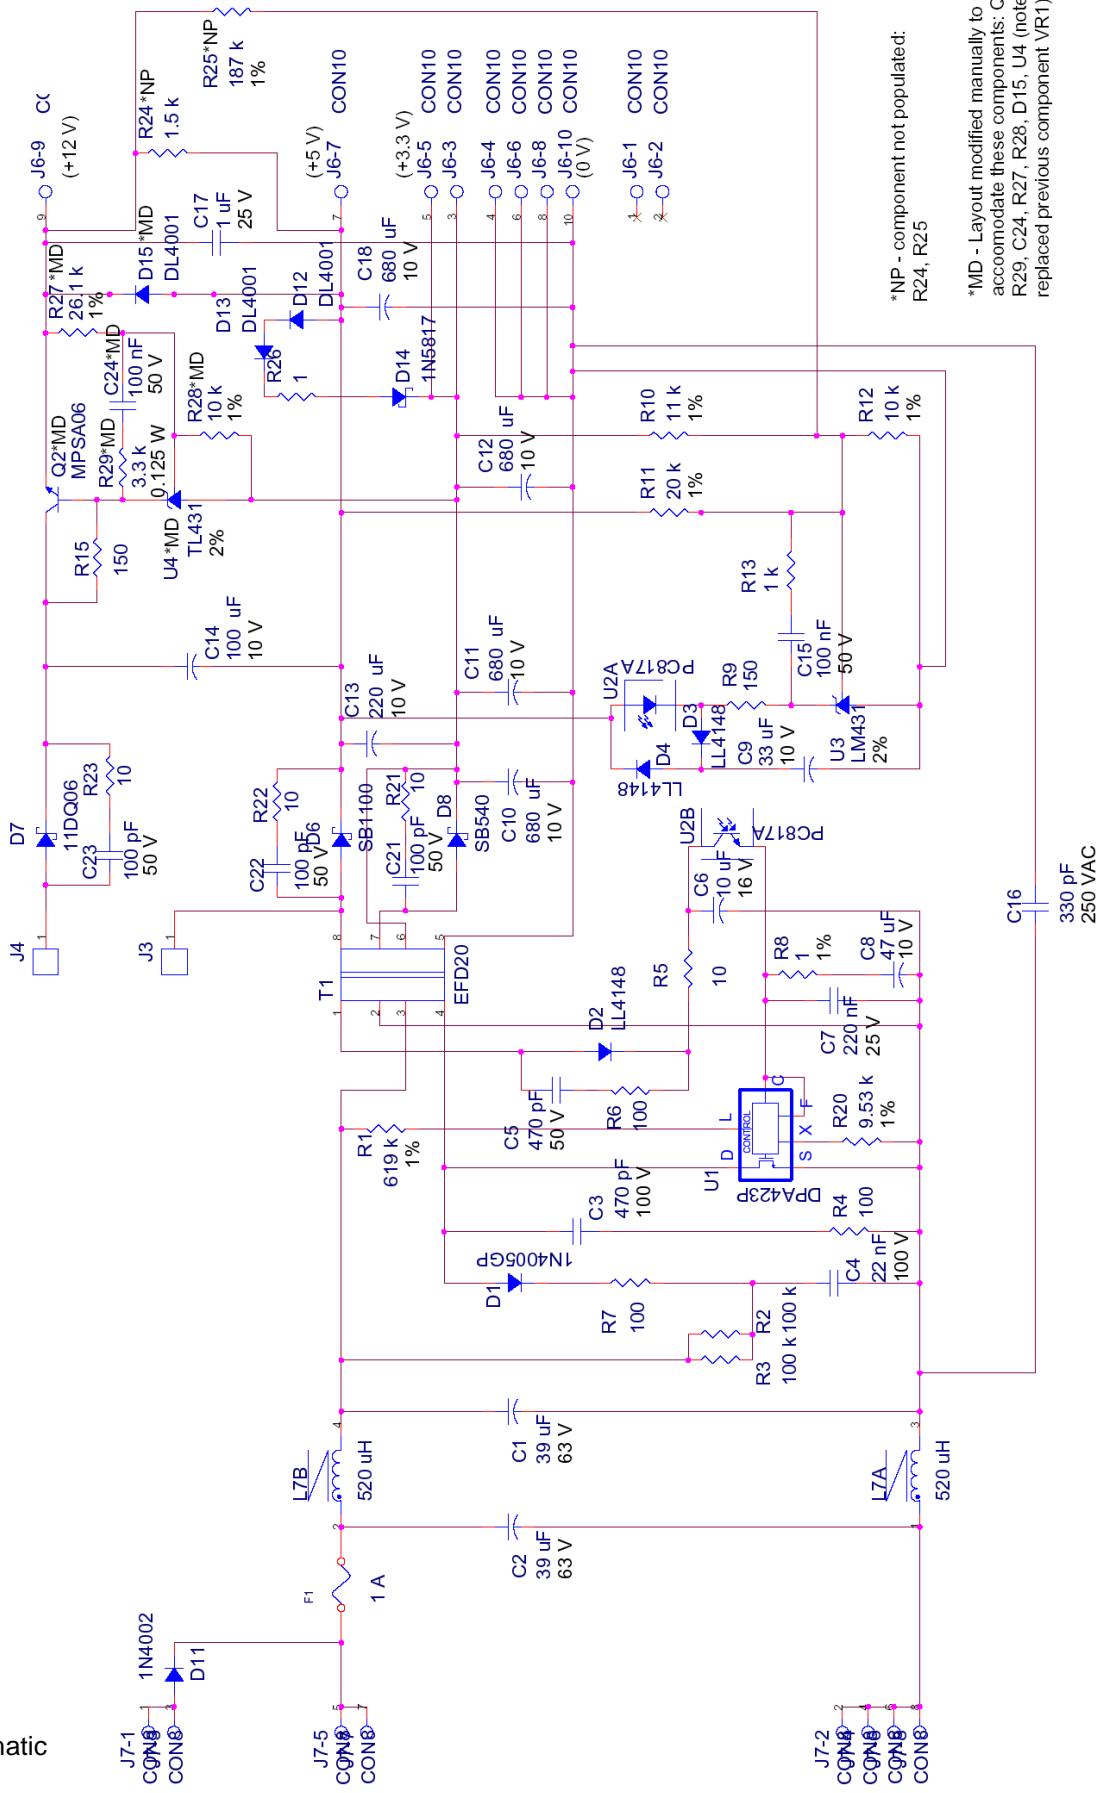


Figure 1 – Schematic

Page 6 of 33

CONFIDENTIAL

Power Integrations
Tel: +1 408 414 9200 Fax: +1 408 414 9201
www.powerint.com



4 Circuit Operation

4.1 General

The power supply uses a DPA423 device (U1), with integrated MOSFET and controller, in an isolated flyback configuration. The circuit also uses the under-voltage shutdown feature of the device along with current limit setting to minimize transformer size. The device operates at a switching frequency of 300 kHz.

4.2 Description

The input fuse F1 protects the supply against catastrophic failure – although the built-in protection features of the DPA-Switch should render this redundant.

The components C1, C2 and L7 form a pi-filter to limit both conducted and radiated EMI emissions. These components work to limit EMI emissions in conjunction with y-capacitor C16 and the shielding in the transformer. Resistor R1 programs the input under voltage startup threshold (and over voltage shutdown voltage). Diode D1, R7, C4, R2, and R3 implement an RCD clamp circuit to limit the leakage inductance spike on the Drain pin. Capacitor C3 and resistor R4 implement a snubber to limit high frequency ringing on the due to drain switching. Diode D2, R5 and C6 implement a bias voltage supply to provide operating power to the DPA-Switch (U4) with integrated PWM, controller and main switching MOSFET. Resistor R6 and C5 provide diode snubber for D2. Resistor R20 programs the current limit of the DPA-Switch. Capacitors C7 and C8 provide device decoupling with C8 also program the startup and auto-restart period of the device. Resistor R8 provides feedback compensation in conjunction with C8. The inductance of transformer T1 provides the energy storage and conversion component of the circuit.

The 3.3 V output is rectified and filtered by diode D8 and capacitors C10, C11 with C12 provided output decoupling. The 5 V output is DC-stacked on the regulated DC output of 3.3 V and is rectified and filtered by diode D6 and capacitors C13 with capacitor C18 providing output decoupling. The 12 V output is AC-stacked on the 5 V transformer winding and is rectified and filtered by diode D7 and capacitor C14 with capacitor C17 providing output decoupling. Transistor Q2 and components R15, R26, R27, R28, C24, U4 implement a linear regulator to eliminate peak charging voltage from the 12 V output. Resistor R26, D12, D13 and D14 all form pre-load networks between the outputs to improve cross-regulation. Components R21, C21, R22, C22, R23 and C23 provide snubbing on output diodes. Diode pulls down the 5 V output when 12 V output is shorted thus forcing DPA-switch auto-restart. Using this diode removes the need for short-circuit protection in the 12 V linear regulator circuit.

Resistors R11 and R10 sense the voltages on 5 V and 3.3 V outputs respectively. In conjunction with R12 they provide the input signal for the LM431 (U3) reference. Components R13 and C15 provide compensation for U3, to make sure that it's frequency response is limited only to low-frequency signals. Resistor R9 programs the high-frequency gain of the control loop and with opto-diode U2A transmits the feedback signal. Diode D3 and C9 provide a soft-finish circuit to limit output overshoot at startup. Diode D4



discharges C9 when the output of the power supply drops out of regulation. Opto-transistor U2B feeds the control signal back to the DPA-Switch.

5 Bill Of Materials

Item	Qty.	Ref.	Description	Mfg Part Number	Mfg
1	2	C1 C2	39 uF, 63, Electrolytic, Low ESR, 610 mOhm, (6.3 x 15)	LXZ63VB39RM515LL	United Chemi-Con
2	1	C3	470 pF, 100 V, Ceramic, X7R	ECU-S2A471KBA	Panasonic
3	1	C4	22 nF, 100 V, Ceramic, X7R	ECU-S2A223KBA	Panasonic
4	1	C5	470 pF 50 V, Ceramic, X7R, 0603	ECJ-1VC1H471J	Panasonic
5	1	C6	10 uF, 16 V, Electrolytic, Gen. Purpose, (5 x 11)	KME16VB10RM5X11 LL	United Chemi-Con
6	1	C7	220 nF, 25 V, Ceramic, X7R, 0805	ECJ-2YB1E224K	Panasonic
7	1	C8	47 uF, 10 V, Electrolytic, Gen. Purpose, (5 x 11)	KME10VB22RM5X11 LL	United Chemi-Con
8	1	C9	33 uF, 10 V, Electrolytic, Gen. Purpose, (5 x 11)	KME10VB33RM5X11 LL	United Chemi-Con
9	4	C10 C11 C12 C18	680 uF, 10 V, Electrolytic, Very Low ESR, 56 mOhm, (8 x 15)	KZE10VB681MH15LL	United Chemi-Con
10	1	C13	220 uF, 10 V, Electrolytic, Very Low ESR, 130 mOhm, (6.3 x 11)	KZE10VB221MF11LL	United Chemi-Con
11	1	C14	100 uF, 10 V, Electrolytic, Very Low ESR, 300 mOhm, (5 x 11)	KZE10VB101ME11LL	United Chemi-Con
12	1	C15	100 nF, 50 V, Ceramic, X7R, 0805	ECU-V1H221KBN	Panasonic
13	1	C16	330 pF, Ceramic Y1	440LT33	Vishay
14	1	C17	1 uF, 25 V, Ceramic, X7R, 1206	ECJ-3YB1E105K	Panasonic
15	3	C21 C22 C23	100 pF 50 V, Ceramic, X7R, 0603	ECJ-1VC1H101J	Panasonic
16	1	C24	100 nF, 50 V, Ceramic, X7R	ECU-S1H104KBB	Panasonic
17	1	D1	600 V, 1 A, Rectifier, Glass Passivated, 2 us, DO-41	1N4005GP	Vishay
18	3	D2 D3 D4	75 V, 0.15 A, Fast Switching, 4 ns, MELF	LL4148	Diode Inc.
19	1	D6	100 V, 1 A, Schottky, DO-41	SB1100	Fairchild
20	1	D7	60 V, 1.1 A, Schottky, DO-41	11DQ06	International Rectifier
21	1	D8	40 V, 5 A, Schottky, DO-201AD	SB540	Vishay
22	1	D11	100 V, 1 A, Rectifier, DO-41	1N4002	Vishay
23	3	D12 D13 D15	50 V, 1 A, Rectifier, Glass Passivated, DO-213AA (MELF)	DL4001	Diodes Inc
24	1	D14	20 V, 1 A, Schottky, DO-41	1N5817	Vishay
25	1	F1	1 A, 250V, Slow, TR5	3,721,100,041	Wickman
26	2	J3 J4 (FL1, FL2)	PCB Terminal Hole, 18 AWG	N/A	N/A
27	1	J6	10 Position, Fem/Male (5 x 2 header, Top & Bot Entry, 0.1 pitch, Vertical	22-28-4100	Molex
28	1	J7	8 Position, Fem/Male (4 x 2) header, Top &		



		Bot Entry, 0.1 pitch, Vertical		
29	1L7	520 uH,xA, Powdered Iron Core, Toroidal, 4 Pin	Custom	Custom
30	1Q2	NPN, Small Signal BJT, 80 V, 0.5 A, TO-92	MPSA06	Fairchild
31	1R1	619 k, 1%, 1/8 W, Metal Film, 0805	ERJ-6ENF6193V	Panasonic
32	2R2 R3	100 k, 5%, 1/4 W, Metal Film, 1206	ERJ-8GEYJ104V	Panasonic
33	1R4	100 R, 5%, 1/8 W, Metal Film, 0805	ERJ-6GEYJ101V	Panasonic
34	1R5	10 R, 5%, 1/10 W, Metal Film, 0603	ERJ-3GEYJ106V	Panasonic
35	2R6 R7	100 R, 5%, 1/10 W, Metal Film, 0603	ERJ-3GEYJ101V	Panasonic
36	1R8	1 R, 1%, 1/16 W, Metal Film, 0603	ERJ-3EKF1004V	Panasonic
37	2R9 R15	150 R, 5%, 1/10 W, Metal Film, 0603	ERJ-3GEYJ151V	Panasonic
38	1R10	8.66 k, 1%, 1/16 W, Metal Film, 0603	ERJ-3EKF8661V	Panasonic
39	1R11	15.8 k, 1%, 1/4 W, Metal Film, 1206	ERJ-8ENF1582V	Panasonic
40	1R12	10 k, 1%, 1/8 W, Metal Film, 0805	ERJ-6ENF1002V	Panasonic
41	1R13	1 k, 5%, 1/10 W, Metal Film, 0603	ERJ-3GEYJ102V	Panasonic
42	1R20	9.53 k, 1%, 1/4 W, Metal Film, 1206	ERJ-8ENF9531V	Panasonic
43	R21 R22 3R23	10 R, 5%, 1/10 W, Metal Film, 0603	ERJ-3GEYJ100V	Panasonic
44	0R24 *NP	1.5 k, 5%, 1/8 W, Metal Film, 0805	ERJ-6GEYJ152V	Panasonic
45	0R25 *NP	150 k, 1%, 1/16 W, Metal Film, 0603	ERJ-3EKF1503V	Panasonic
46	1R26	1 R, 5%, 1/8 W, Metal Film, 0805	ERJ-6GEYJ1R0V	Panasonic
47	1R27	26.1 k, 1%, 1/4 W, Metal Film	MFR-25FBF-26K1	Yageo
48	1R28	10 k, 1%, 1/4 W, Metal Film	MFR-25FBF-10K0	Yageo
49	1R29	3.3 k, 5%, 1/8 W, Carbon Film	CFR-12JB-3K3	Yageo
50	1T1	Bobbin, EFD20, Horizontal, 8 pins	YW-272-03B	Yih-Hwa Enterprises
51	1U1	DPA-Switch, DPA423P, DIP-8	DPA423P	Power Integrations
52	1U2	Opto coupler, 35 V, CTR 80-160%, 4-DIP	ISP817A, PC817X1	Isocom, Sharp
53	1U3	2.495 V Shunt Regulator IC, 2%, -40 to 85C, SOT23	LM431AIM	National Semiconductor
54	1U4	2.495 V Shunt Regulator IC, 2%, 0 to 70C, TO-92	TL431CLP	Texas Instruments
	68 Total			



6 Layout

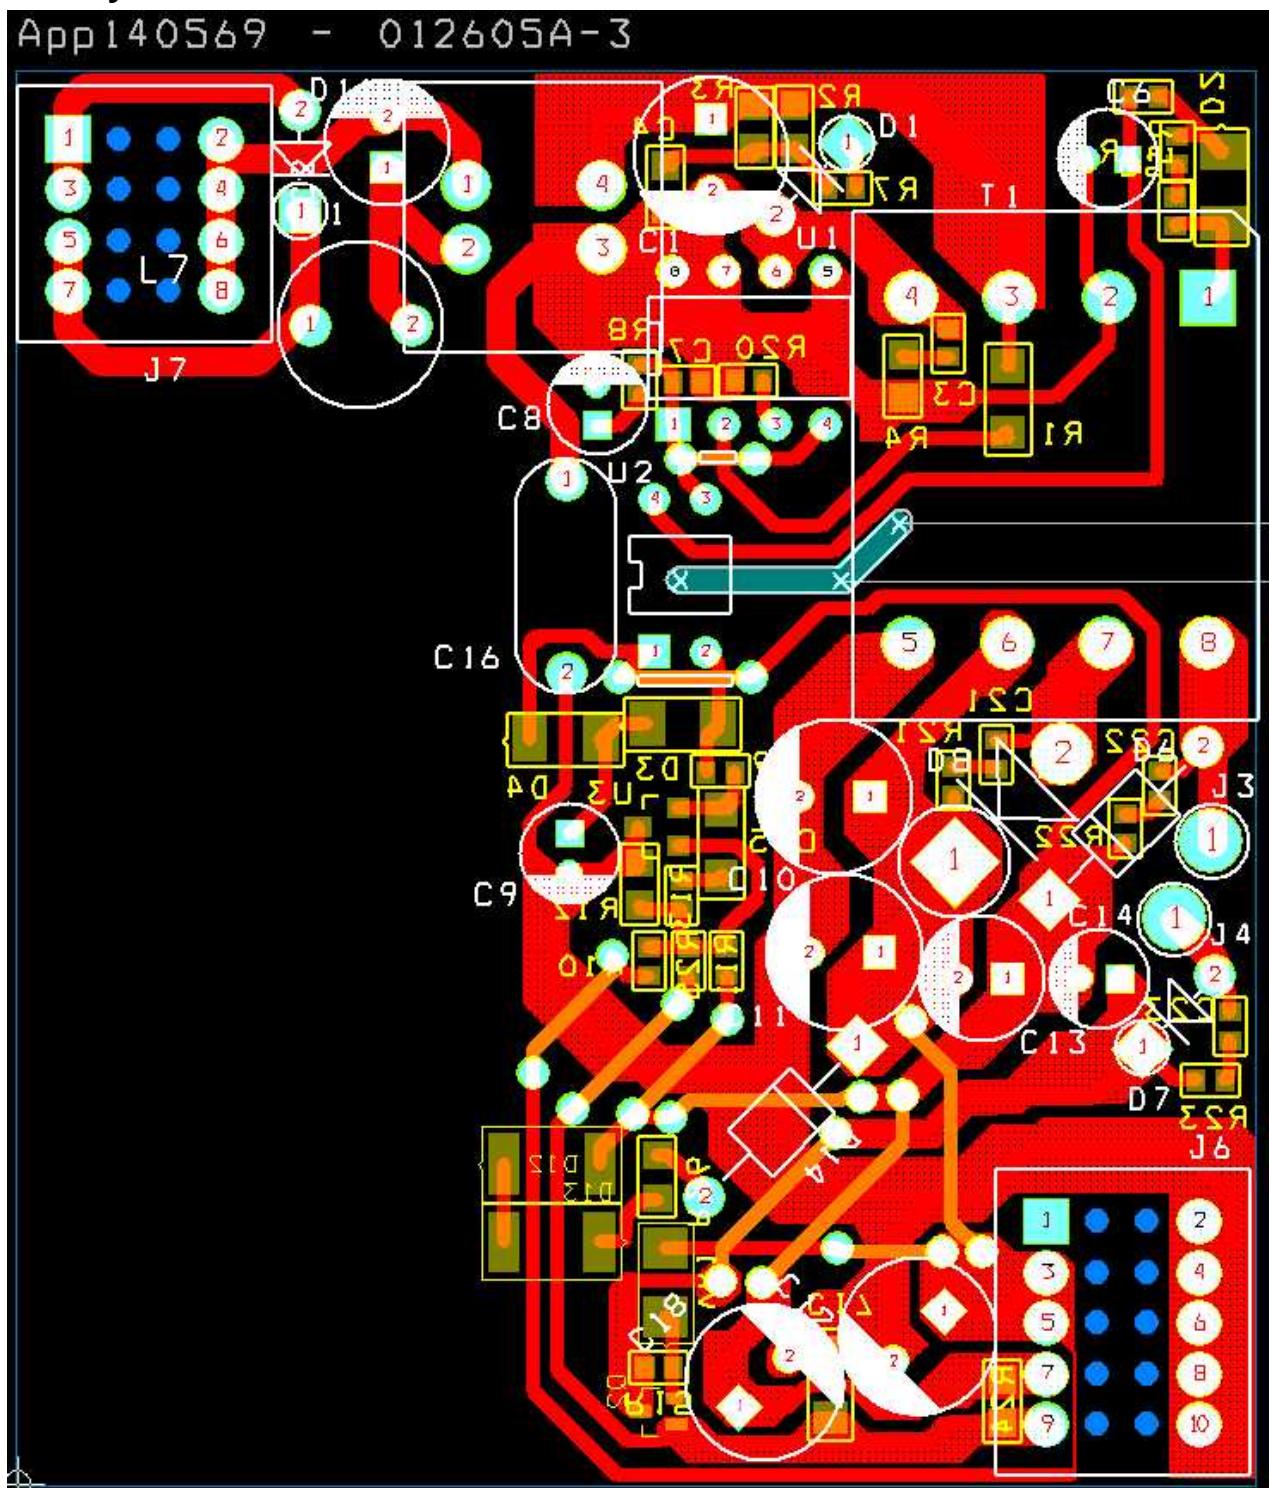


Figure 2 – PC-Board Layout (see schematic for *MP and *NP parts)

7 Transformer Design Spreadsheet

061704; Rev.1.11; Copyright Power Integrations Inc. 2004	INPUT	INFO	OUTPUT	UNITS	DPASwitch_Flyback_061704 - Continuous/Discontinuous mode Spreadsheet. Copyright 2004 Power Integrations
ENTER APPLICATION VARIABLES					App140569 - EFD20 - 010605a
VDCMIN	37		Volts		Minimum DC Input Voltage
VDCMAX	57		Volts		Maximum DC Input Voltage
VO	3.3		Volts		Output Voltage
PO	10	Comment	Watts		Verify temperature rise for continuous power. P and G packages may be thermally limited
n	0.8				Efficiency Estimate
Z			0.7		Loss Allocation Factor, (0.7 Recommended)
VB	14		Volts		Bias Voltage (Recommended between 12V and 18V)
UV AND OV PARAMETERS					
		min	max		
UVUOFF		30.8802	34.06899	Volts	Minimum undervoltage On-Off threshold
UVUVON		33.11235	35.66338	Volts	Maximum undervoltage Off-On threshold (turn-on)
VOVON		77.1176	-	Volts	Minimum overvoltage Off-On threshold
VOVOFF			97.52584	Volts	Maximum overvoltage On-Off threshold (turn-off)
RL			637.7573	k-Ohms	
ENTER DPASWITCH VARIABLES					
DPASWITCH	DPA423P		16VDC	36 VDC	
Chosen Device	#N/A		Power Out	6W	13W
ILIMITMAX	#N/A	1.34	Amps		From DPASWITCH Data Sheet
Frequency	F				Enter 'F' for fS = 400KHz and 'L' for fS = 300KHz
fS	#N/A		Hertz		DPASWITCH Switching Frequency
VOR	38		38	Volts	Reflected Output Voltage
KI	0.80		0.8		Current Limit Reduction Factor
ILIMITEXT			0.928	Amps	Minimum External Current limit
RX		9.501216	k-Ohms		Resistor from X pin to source to set external current limit
VDS	1		Volts		DPASWITCH on-state Drain to Source Voltage
VD	0.45		Volts		Output Winding Diode Forward Voltage Drop
VDB	0.7		Volts		Bias Winding Diode Forward Voltage Drop
KRP/KDP	0.40				Ripple to Peak Current Ratio (0.2 < KRP < 1.0 : 1.0< KDP<6.0)
ENTER TRANSFORMER CORE/CONSTRUCTION VARIABLES					
Core Type	efd20				Selected Transformer Core
Core Manuf					
Bobbin Manuf					
Core		EFD20	P/N:		EFD20-3F3-Exxx-xx
Bobbin		EFD20_Bo	P/N:		CPHS-EFD20-1S-10P-T
AE			0.31	cm^2	Core Effective Cross Sectional Area
LE			4.7	cm	Core Effective Path Length
AL			1200	nH/T^2	Ungapped Core Effective Inductance
BW			13.5	mm	Bobbin Physical Winding Width
M	0		mm		Safety Margin Width (Half the Primary to Secondary Creepage Distance)
L	2				Number of Primary Layers
NS	3				Number of Secondary Turns



CURRENT WAVEFORM SHAPE PARAMETERS			
DMAX		0.513514	Maximum Duty Cycle
IAVG		0.337838	Amps Average Primary Current
IP		0.822368	Amps Peak Primary Current
IR		0.328947	Amps Primary Ripple Current
IRMS		0.476332	Amps Primary RMS Current
TRANSFORMER PRIMARY DESIGN PARAMETERS			
LP		144.7851	uHenries Primary Inductance
NP		30.4	Primary Winding Number of Turns
NB		11.76	Bias Winding Number of Turns
ALG		156.6667	nH/T^2 Gapped Core Effective Inductance
BP		1425.727	Gauss Peak Flux density during transients (Limit to 3000 Gauss)
BM		1263.441	Gauss Maximum Flux Density
BAC		252.6882	Gauss AC Flux Density for Core Loss Curves (0.5 X Peak to Peak)
ur		1447.793	Relative Permeability of Ungapped Core
LG		0.216191	mm Gap Length (Lg >> 0.051 mm)
BWE		27	mm Effective Bobbin Width
TRANSFORMER SECONDARY DESIGN PARAMETERS			
ISP		8.333333	Amps Peak Secondary Current
ISRMS		4.698092	Amps Secondary RMS Current
IO		3.030303	Amps Power Supply Output Current
IRIPPLE		3.590172	Amps Output Capacitor RMS Ripple Current
VOLTAGE STRESS PARAMETERS			
VDRAIN		156.8	Volts Maximum Drain Voltage (Includes Effect of Leakage Inductance)
PIVS		8.925	Volts Output Rectifier Maximum Peak Inverse Voltage
PIVB		36.05	Volts Bias Rectifier Maximum Peak Inverse Voltage
ADDITIONAL OUTPUTS			
V_OUT2	1.7330		Volts Auxiliary Output Voltage
VD_OUT2	0.8000		Volts Auxiliary Diode Forward Voltage Drop
N_OUT2		2.0264	Auxiliary Number of Turns
PIV_OUT2		5.5325	Volts Auxiliary Rectifier Maximum Peak Inverse Voltage
V_OUT3	6.9		Volts Auxiliary Output Voltage
VD_OUT3	0.7		Volts Auxiliary Diode Forward Voltage Drop
N_OUT3		6.08	Auxiliary Number of Turns
PIV_OUT3		18.3	Volts Auxiliary Rectifier Maximum Peak Inverse Voltage

Note1: the output Vout2 is DC-stacked on top of Vout1 (after the Vout1 rectifier diode), the output Vout3 is AC-stacked on top of the Vout2 winding (before Vout2 rectifier diode).



8 Transformer Specification

8.1 Transformer Winding

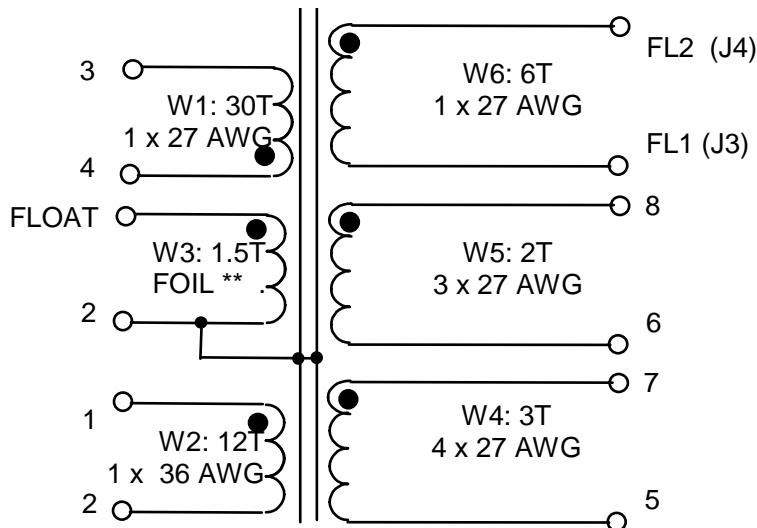


Figure 3 – Transformer Electrical Diagram (** denotes reverse wound)

8.2 Electrical Specifications

Electrical Strength	Non-isolated	N/A
Primary Inductance	Pins 3-4, all other windings open, measured at 300 kHz, 0.4 VRMS	145 μ H, -0/+20%
Resonant Frequency	Pins 3-4, all other windings open	5 MHz (Min.)
Primary Leakage Inductance	Pins 3-4, with Pins 5,6,7,8 shorted, measured at 300 kHz, 0.4 VRMS	5 uH (Max.)

8.3 Materials

Item	Description
[1]	Core: EFD20 ALG=157 nH/t^2 (core 3F3 material)
[2]	Bobbin: EFD20 8-pin horizontal
[3a]	27AWG Doubled insulated
[3b]	36 AWG Doubled insulated
[3c]	1 mil foil
[4]	Prepared foil – see assembly diagram.
[6]	Tape:
[8]	Varnish

8.4 Transformer Build Diagram

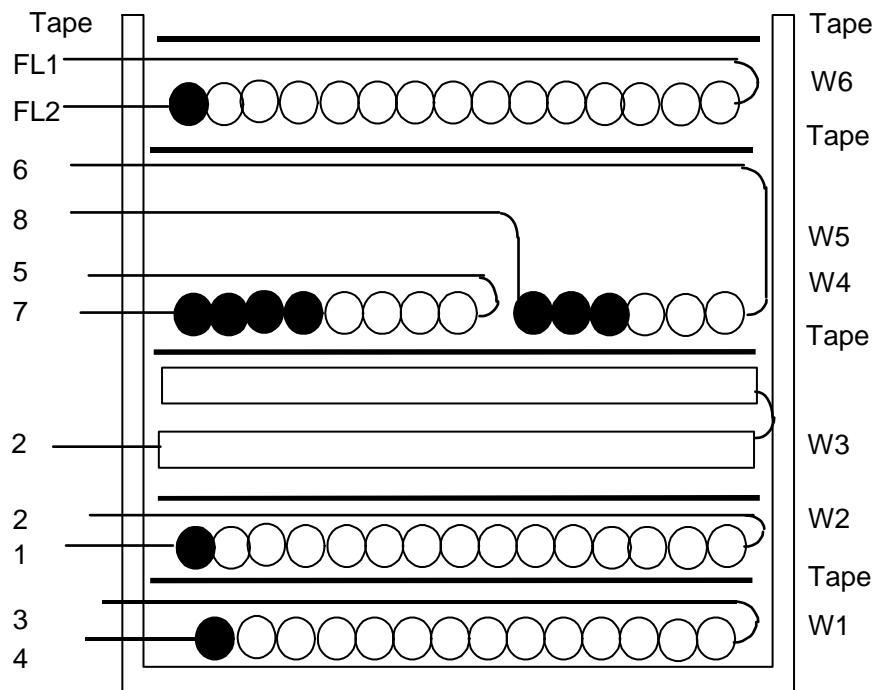



Figure 4 – Transformer Build Diagram

8.5 Transformer Construction

W1	Start at Pin 4. Wind 30 turns item [3a]. Finish on pin 3
Tape	Use layer of item [6].
W2	Start at Pin 1. Wind 12 turns item [3b]. Spread evenly across bobbin. Finish on pin 2
Tape	Use layer of item [6].
W3	Start at Pin 2. Wind reverse direction 1.5 turns of item [4]. Finish winding and leave floating in stack.
Tape	Use layer of item [6].
W4	Start at Pins 7. Wind 3 turns quad-filar item [3a]. Spread evenly across bobbin. Finish temporarily on pin 1.
W5	Start at Pin 8. Wind 2 turns tri-filar item [3a]. Spread evenly across bobbin, filling in the gaps in the previous W3. Finish on pin 6. Move temporary connection from Pin 1 to Pin 5.
Tape	Use layer of item [6].
W6	Start at FL2. Wind 6 turns item [3a]. Spread evenly across bobbin. Finish on FL1.
Outer Wrap	Wrap windings with 3 layers of tape [item [7]].
Core Ground	Use copper self-adhesive tape touching core on all four sides. Make connection from this tape to pin 2 of bobbin. Note: this is not a "belly-band", this is instead purely to electrically ground the core
Final Assembly	Assemble and secure core halves. Varnish impregnate (item [8]).



8.5.1 WD#3 Copper Foil build diagram:

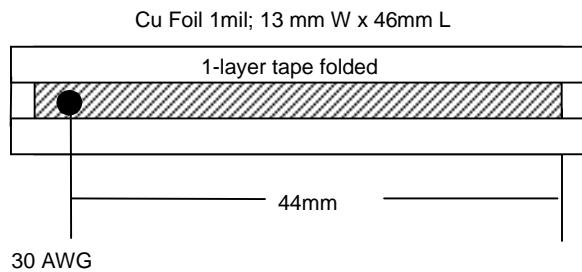

9 Inductor Specification

9.1 Inductor Winding

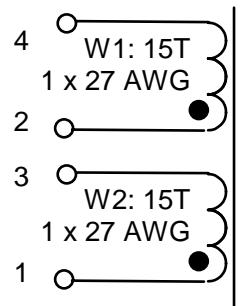


Figure 5 – Inductor Electrical Diagram

9.2 Electrical Specifications

Electrical Strength	Non-isolated	N/A
Primary Inductance	Pins 4-2, all other windings open, measured at 300 kHz, 0.4 VRMS	520 μ H, -0/+20%
Resonant Frequency	Pins 4-2, all other windings open	3.9 MHz (Min.)
Primary Leakage Inductance	Pins 4-2, with Pins 1,2,3,5,6,8 shorted, measured at 300 kHz, 0.4 VRMS	3.5 uH (Max.)

9.3 Materials

Item	Description
[1]	Core: Fair-rite - 5975000201 (diameter 9.5mm, Al=4400)
[2]	Bobbin – 8 pin former
[3a]	27AWG Doubled insulated
[8]	Hot-set glue

9.4 Inductor Footprint Diagram

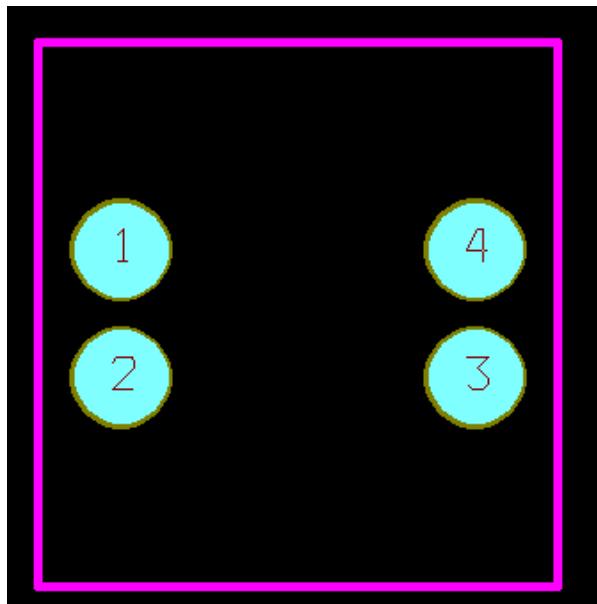


Figure 6 – Transformer Footprint – Top Side View Diagram

9.5 Inductor Construction

W1	Start at Pin 2. Wind 15 turns item [3a]. Finish on pin 4
W2	Start at Pin 1. Wind 15 turns item [3a]. Finish on pin 3
Outer Wrap	Wrap windings with 3 layers of tape [item [7].
Final Assembly	Assemble and secure core halves. Impregnate (item [8]).

10 Performance

10.1 Efficiency

Efficiency vs Line/Load

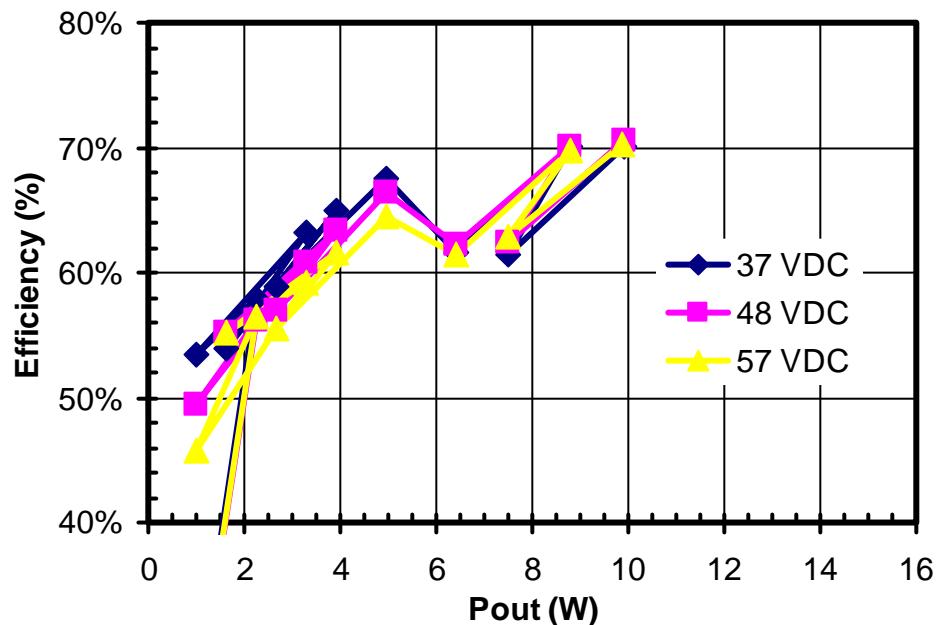


Figure 7 – Efficiency vs. Input Voltage and Output Load, Room Temperature

10.2 Regulation vs. Load

Regulation vs Load

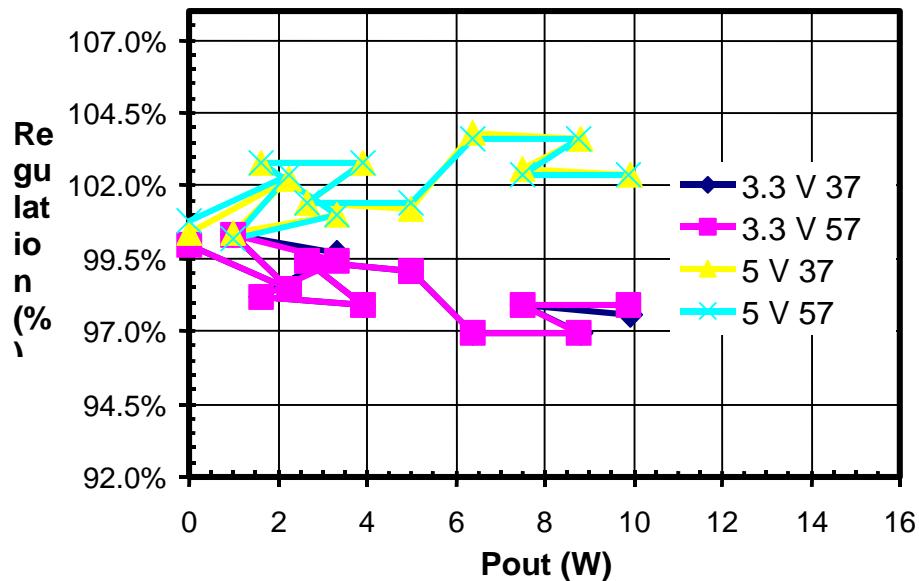


Figure 8 – Output Regulation vs. Output Load for 3.3 V and 5 V Outputs, Room Temperature

10.3 Regulation vs. Load

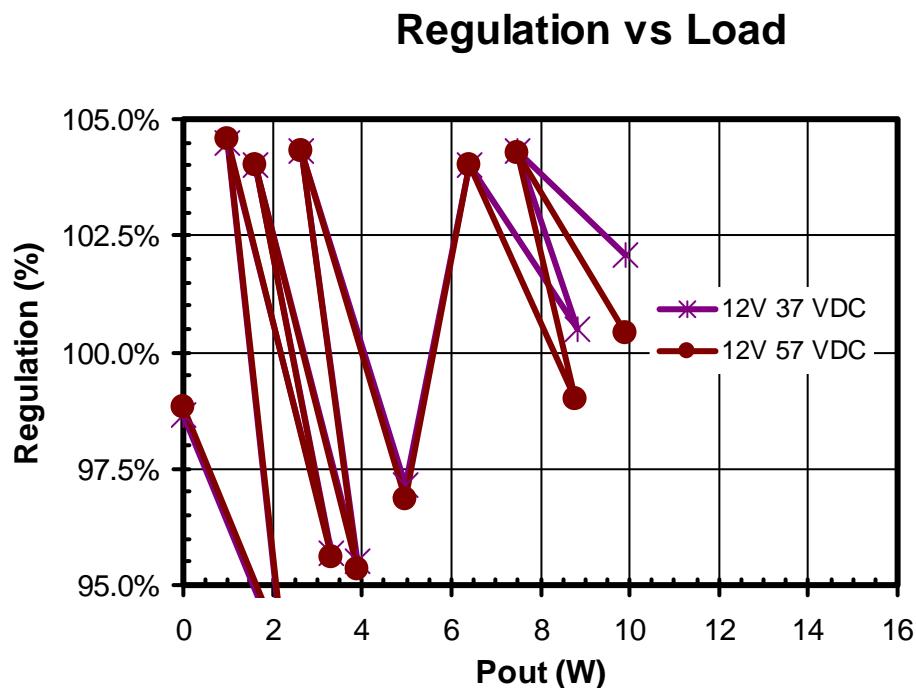


Figure 9 – Output Regulation vs. Output Load for 12 V Output, Room Temperature

10.4 Raw Performance Data

It can be seen from the data below, that the power supply meets the regulation requirements even without need for a linear-regulator on the 5 V output. Also the efficiency of 70.5% at 48 VDC very high compared to alternate solutions.

Vin (DC)	Iin (A)	Vout1 (V)	Iout1 (A)	Vout2 (V)	Iout2 (A)	Vout3 (V)	Iout3 (A)
37.6	0.021	3.3	0	5.02	0	11.84	0
37.6	0.103	3.25	0	5.11	0	11.21	0.2
37.6	0.05	3.31	0	5.02	0.2	12.54	0
37.6	0.139	3.29	0	5.05	0.2	11.48	0.2
37.6	0.08	3.24	0.5	5.14	0	12.48	0
37.6	0.16	3.23	0.5	5.14	0	11.46	0.2
37.6	0.12	3.28	0.5	5.07	0.2	12.52	0
37.6	0.196	3.27	0.5	5.06	0.2	11.66	0.2
37.5	0.277	3.2	2	5.19	0	12.48	0
37.5	0.335	3.2	2	5.18	0	12.06	0.2
37.5	0.325	3.23	2	5.13	0.2	12.52	0
37.5	0.377	3.22	2	5.12	0.2	12.25	0.2
48.2	0.019	3.3	0	5.04	0	11.87	0
48.2	0.083	3.25	0	5.11	0	11.23	0.2
48.2	0.042	3.31	0	5.01	0.2	12.55	0
48.1	0.113	3.28	0	5.05	0.2	11.48	0.2
48.1	0.061	3.24	0.5	5.14	0	12.48	0
48.1	0.128	3.23	0.5	5.14	0	11.44	0.2
48.1	0.097	3.28	0.5	5.07	0.2	12.52	0
48.1	0.156	3.27	0.5	5.08	0.2	11.64	0.2
48.1	0.214	3.2	2	5.18	0	12.47	0
48.1	0.261	3.2	2	5.18	0	11.94	0.2
48.1	0.249	3.23	2	5.11	0.2	12.51	0
48.1	0.292	3.23	2	5.12	0.2	12.12	0.2
57.6	0.017	3.3	0	5.04	0	11.86	0
57.6	0.069	3.25	0	5.12	0	11.23	0.2
57.6	0.038	3.31	0	5.01	0.2	12.55	0
57.6	0.097	3.28	0	5.05	0.2	11.47	0.2
57.6	0.051	3.24	0.5	5.14	0	12.48	0
57.6	0.11	3.23	0.5	5.14	0	11.44	0.2
57.6	0.083	3.28	0.5	5.07	0.2	12.52	0
57.6	0.134	3.27	0.5	5.07	0.2	11.62	0.2
57.5	0.181	3.2	2	5.18	0	12.48	0
57.5	0.219	3.2	2	5.18	0	11.88	0.2
57.5	0.207	3.23	2	5.12	0.2	12.51	0
57.5	0.245	3.23	2	5.12	0.2	12.05	0.2
Max	3.31	0.3%	5.19	3.8%	12.54	4.5%	
Min	3.2	-3.0%	5.02	0.4%	11.21	-6.6%	
Delta	0.11	3.3%	0.17	3.4%	1.33	11.1%	



Vnom1=	3.3	Vnom3=	12							
Vnom2=	5									
%Vout1 (%)	%Vout2 (%)	%Vout3 (%)		Pin (W)	Eff (%)	Pout1 (W)	Pout2 (W)	Pout3 (W)	Pout6 (W)	Pout (W)
100.0%	100.4%	98.7%	0.7896	0.0%	0.0	0.0	0.0	0.0	0.0	0.0
98.5%	102.2%	93.4%	3.8728	57.9%	0.0	0.0	2.2	0.0	0.0	2.2
100.3%	100.4%	104.5%	1.88	53.4%	0.0	1.0	0.0	0.0	0.0	1.0
99.7%	101.0%	95.7%	5.2264	63.3%	0.0	1.0	2.3	0.0	0.0	3.3
98.2%	102.8%	104.0%	3.008	53.9%	1.6	0.0	0.0	0.0	0.0	1.6
97.9%	102.8%	95.5%	6.016	64.9%	1.6	0.0	2.3	0.0	0.0	3.9
99.4%	101.4%	104.3%	4.512	58.8%	1.6	1.0	0.0	0.0	0.0	2.7
99.1%	101.2%	97.2%	7.3696	67.6%	1.6	1.0	2.3	0.0	0.0	5.0
97.0%	103.8%	104.0%	10.3875	61.6%	6.4	0.0	0.0	0.0	0.0	6.4
97.0%	103.6%	100.5%	12.5625	70.1%	6.4	0.0	2.4	0.0	0.0	8.8
97.9%	102.6%	104.3%	12.1875	61.4%	6.5	1.0	0.0	0.0	0.0	7.5
97.6%	102.4%	102.1%	14.1375	70.1%	6.4	1.0	2.5	0.0	0.0	9.9
100.0%	100.8%	98.9%	0.9158	0.0%	0.0	0.0	0.0	0.0	0.0	0.0
98.5%	102.2%	93.6%	4.0006	56.1%	0.0	0.0	2.2	0.0	0.0	2.2
100.3%	100.2%	104.6%	2.0244	49.5%	0.0	1.0	0.0	0.0	0.0	1.0
99.4%	101.0%	95.7%	5.4353	60.8%	0.0	1.0	0.0	0.0	0.0	0.0
98.2%	102.8%	104.0%	2.9341	55.2%	1.6	1.0	2.3	0.0	0.0	5.0
97.9%	102.8%	95.3%	6.1568	63.4%	1.6	0.0	0.0	0.0	0.0	6.4
99.4%	101.4%	104.3%	4.6657	56.9%	1.6	0.0	2.4	0.0	0.0	8.8
99.1%	101.6%	97.0%	7.5036	66.4%	1.6	1.0	0.0	0.0	0.0	5.0
97.0%	103.6%	103.9%	10.2934	62.2%	6.4	0.0	0.0	0.0	0.0	6.4
97.0%	103.6%	99.5%	12.5541	70.0%	6.4	0.0	2.4	0.0	0.0	8.8
97.9%	102.2%	104.3%	11.9769	62.5%	6.5	1.0	0.0	0.0	0.0	7.5
97.9%	102.4%	101.0%	14.0452	70.5%	6.5	1.0	2.4	0.0	0.0	9.9
100.0%	100.8%	98.8%	0.9792	0.0%	0.0	0.0	0.0	0.0	0.0	0.0
98.5%	102.4%	93.6%	3.9744	56.5%	0.0	0.0	2.2	0.0	0.0	2.2
100.3%	100.2%	104.6%	2.1888	45.8%	0.0	1.0	0.0	0.0	0.0	1.0
99.4%	101.0%	95.6%	5.5872	59.1%	0.0	1.0	2.3	0.0	0.0	3.3
98.2%	102.8%	104.0%	2.9376	55.1%	1.6	0.0	0.0	0.0	0.0	1.6
97.9%	102.8%	95.3%	6.336	61.6%	1.6	0.0	2.3	0.0	0.0	3.9
99.4%	101.4%	104.3%	4.7808	55.5%	1.6	1.0	0.0	0.0	0.0	2.7
99.1%	101.4%	96.8%	7.7184	64.4%	1.6	1.0	2.3	0.0	0.0	5.0
97.0%	103.6%	104.0%	10.4075	61.5%	6.4	0.0	0.0	0.0	0.0	6.4
97.0%	103.6%	99.0%	12.5925	69.7%	6.4	0.0	2.4	0.0	0.0	8.8
97.9%	102.4%	104.3%	11.9025	62.9%	6.5	1.0	0.0	0.0	0.0	7.5
97.9%	102.4%	100.4%	14.0875	70.2%	6.5	1.0	2.4	0.0	0.0	9.9
100.3%	103.8%	104.5%	14.1	70.1%						9.9
97.0%	100.4%	93.4%	1.9	53.4%						1.0
3.3%	3.4%	11.1%	12.3	16.7%						



10.5 Thermal Performance

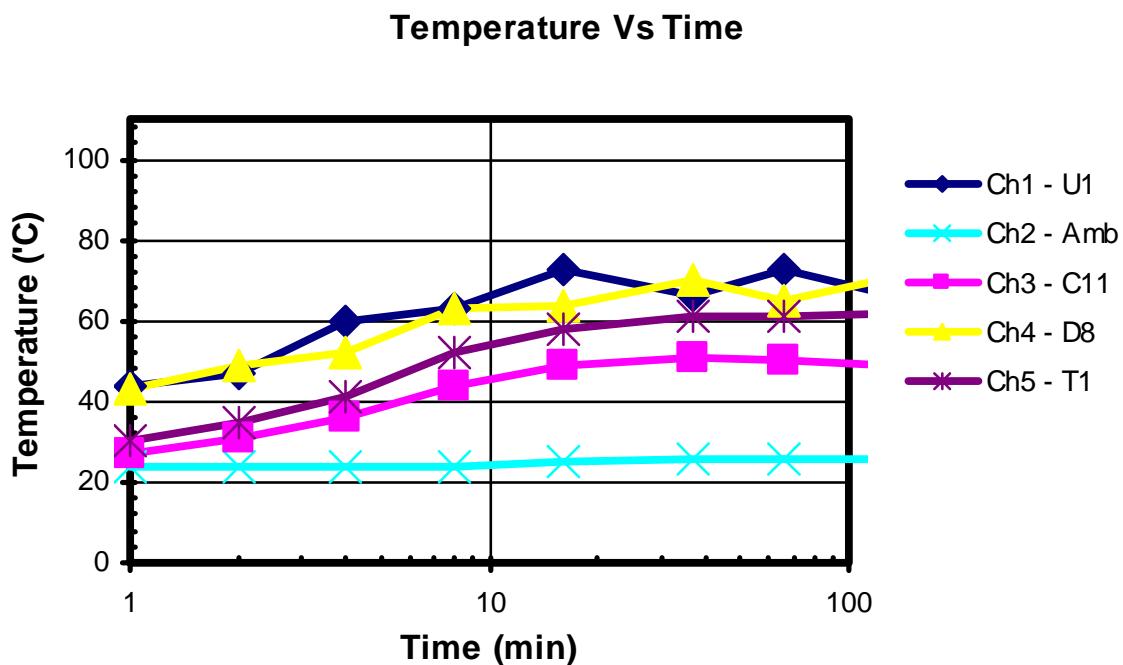


Figure 10 – Thermal Performance of Key Power Supply Components

Time (Mins.)	Temperature				
	U1 (Drain) (°C)	Amb (°C)	C11 (°C)	D8 (°C)	T1 (°C)
0	24	24	25	25	25
1	44	24	27	43	30
2	47	24	31	49	35
4	60	24	36	52	41
8	63	24	44	63	52
16	73	25	49	64	58
37	66	26	51	70	61
66	73	26	50	65	61
132	66	26	49	71	62

Figure 11 – Raw Test Data

11 Waveforms

11.1 Drain Current and Voltage

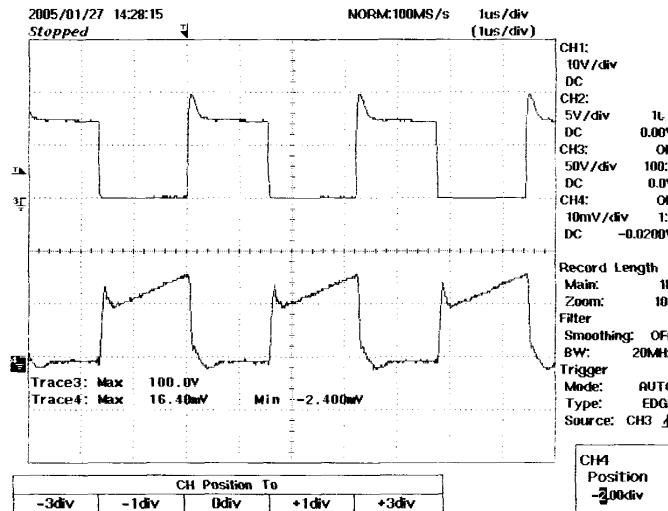


Figure 12 – 37 VDC, full load

Upper Ch3: Drain Voltage 50 V,
Lower Ch4: Drain Current 0.5 A / Div,
1 μ s / div

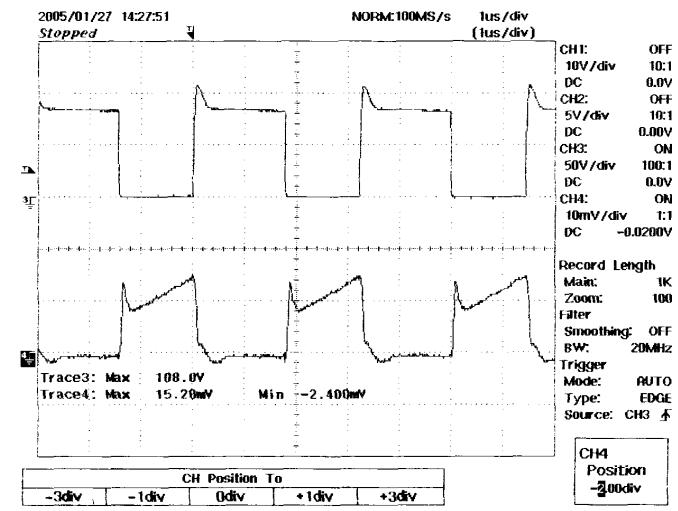


Figure 13 – 48 VDC, full load

Upper Ch3: Drain Voltage 50 V,
Lower Ch4: Drain Current 0.5 A / Div,
1 μ s / div


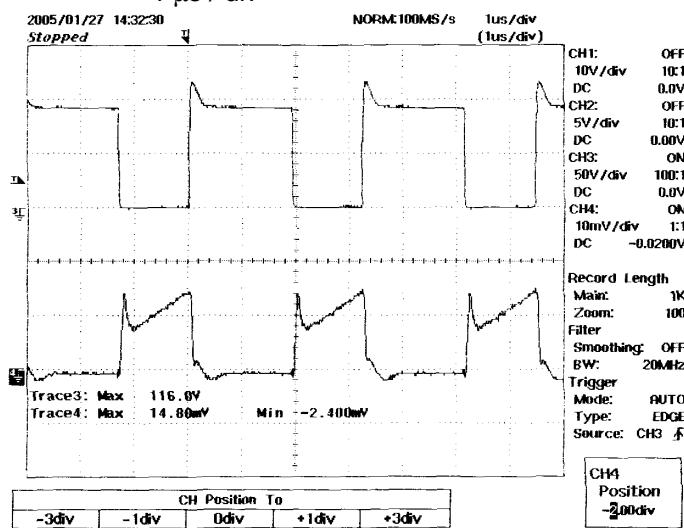



Figure 14 – 57 VDC, full load

Upper Ch3: Drain Voltage 50 V,
Lower Ch4: Drain Current 0.5 A / Div,
1 μ s / div


11.2 Output Transient Load Response

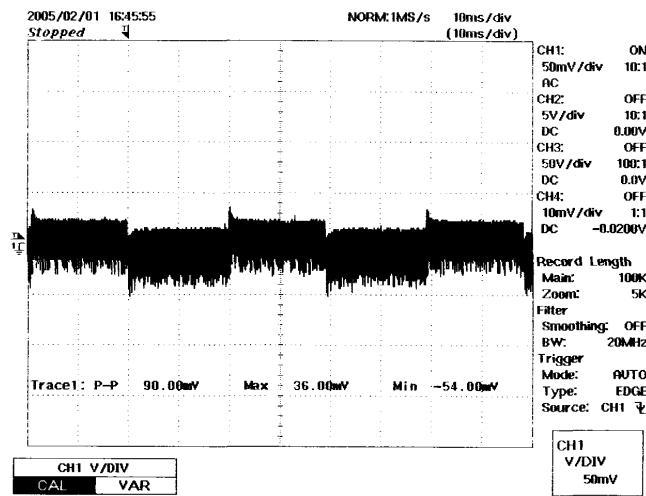

**Figure 15 – 48 VDC, full load (3.3 V 1.6 A to 2.0 A step)
3.3 V Output Voltage
50 mV / Div, 10 ms / div**

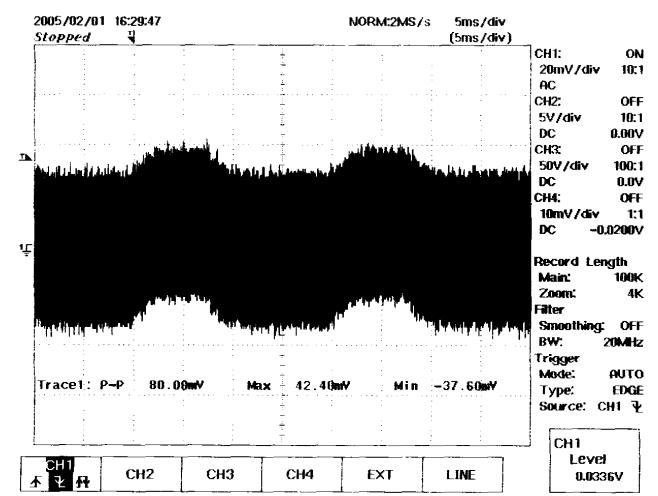

**Figure 16 – 48 VDC, full load (5 V 0.16 A to 0.2 A step)
5 V Output Voltage
20 mV / Div, 10 ms / div**

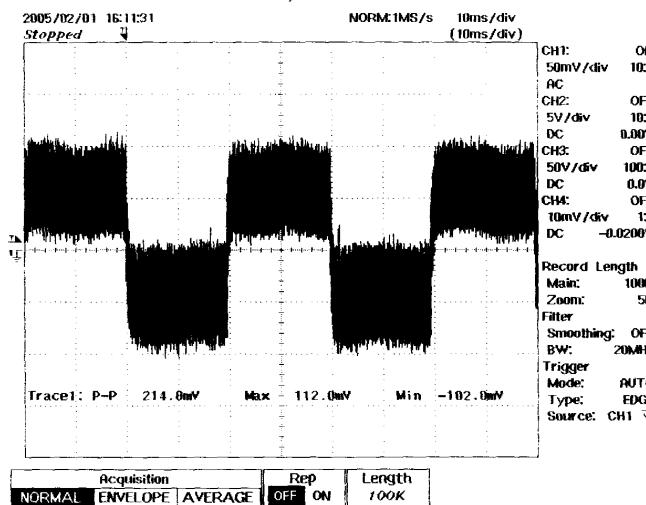

**Figure 17 – 48 VDC, full load (12 V 0.16 A to 0.2 A step)
12 V Output Voltage
50 mV / Div, 10 ms / div**

11.3 Output Ripple Voltage

It can be seen from the waveforms below that the power supply comfortably meets the output ripple specifications. This is possible even without the need for an output inductor.

Measurements made with 0.1 μF ceramic capacitor in parallel with a 1 μF / 50 V electrolytic capacitor, and also made using very short lead length connections to the output pins of the power supply.

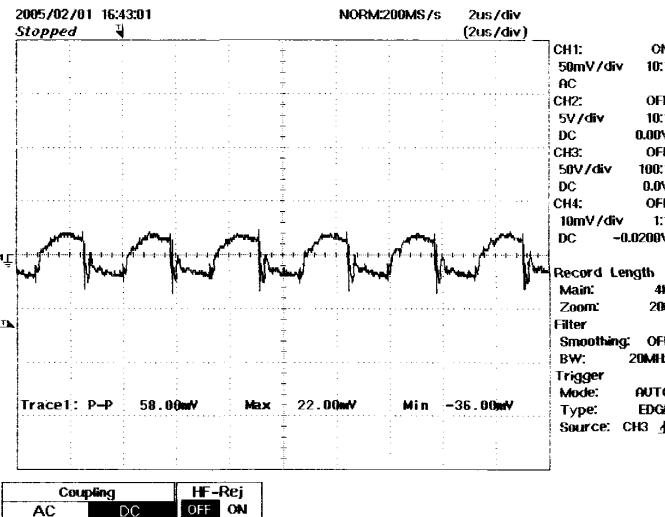


Figure 18 – 48 VDC, Full Load
3.3 V Output Ripple, 50 mV,
2 μs / div

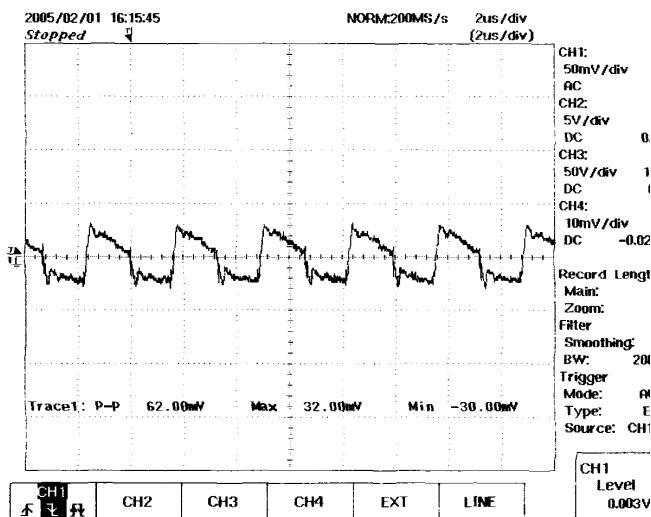


Figure 19 – 48 VDC, Full Load
5V Output Ripple, 50 mV,
2 μs / div

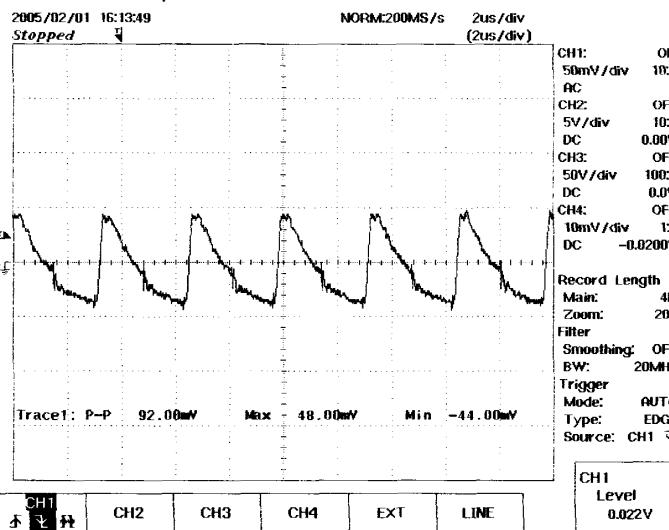


Figure 20 – 48 VDC, Full Load
12 V Output Ripple, 50 mV,
2 μs / div

11.4 Output Voltage Start-up Profile

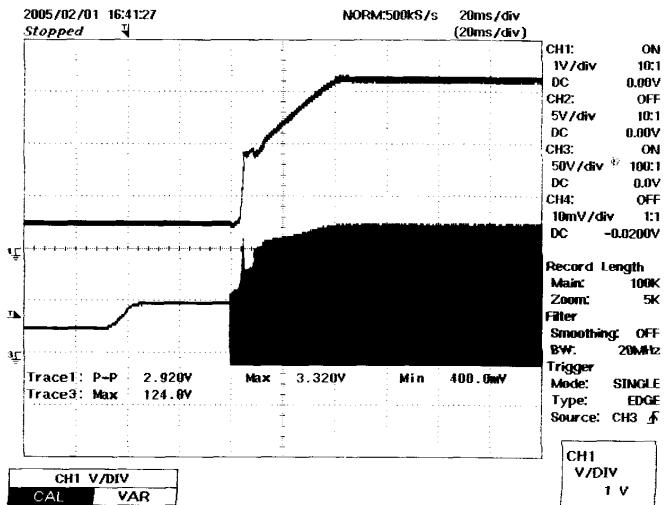
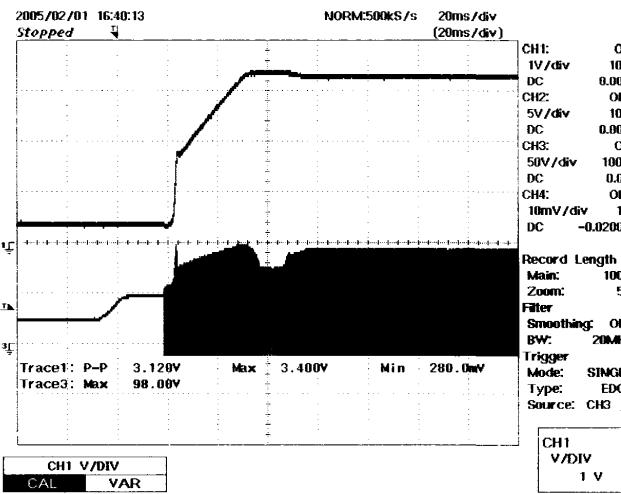


Figure 21 – 3.3 V Start-up at No Load, 48 VDC
Upper Ch1: 3.3 V output, 1 V / div,
Lower Ch3: Drain Voltage 50 V / div,
20 ms / div.

Figure 22 – 3.3 V Start-up at Full Load, 48 VDC
Upper Ch1: 3.3 V output, 1 V / div,
Lower Ch3: Drain Voltage 50 V / div,
20 ms / div.

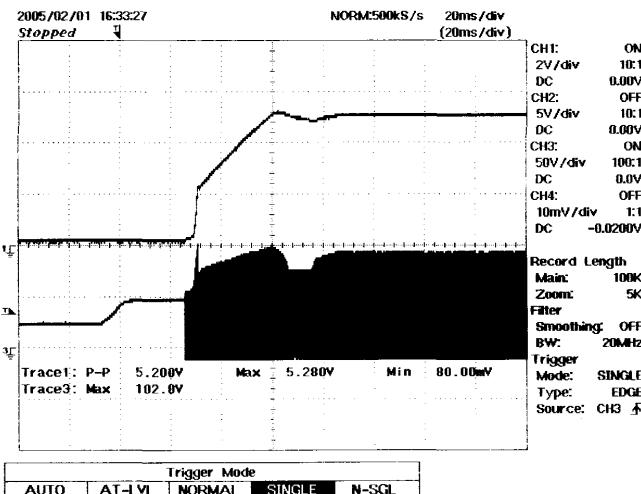


Figure 23 – 5 V Start-up at No Load, 48 VDC
Upper Ch1: 5 V output, 2 V / div,
Lower Ch3: Drain Voltage 50 V / div,
20 ms / div.

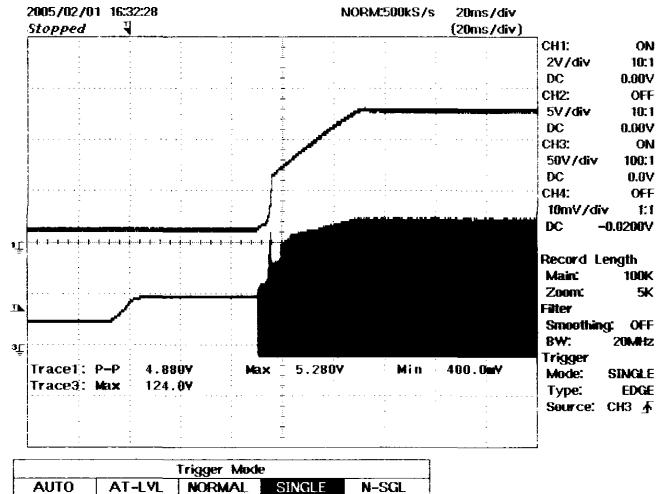


Figure 24 – 5 V Start-up at Full Load, 48 VDC
Upper Ch1: 5 V output, 2 V / div,
Lower Ch3: Drain Voltage 50 V / div,
20 ms / div.



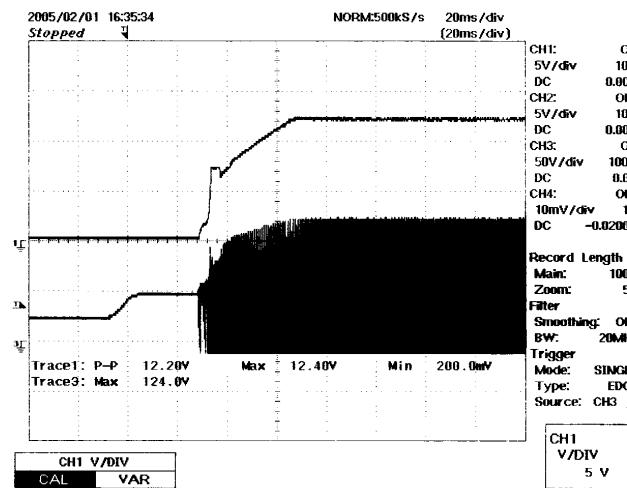


Figure 25 – Start-up Profile at No Load, 48 VDC
Upper Ch1: 12 V output, 2 V / div,
Lower Ch3: Drain Voltage 50 V / div,
20 ms / div.

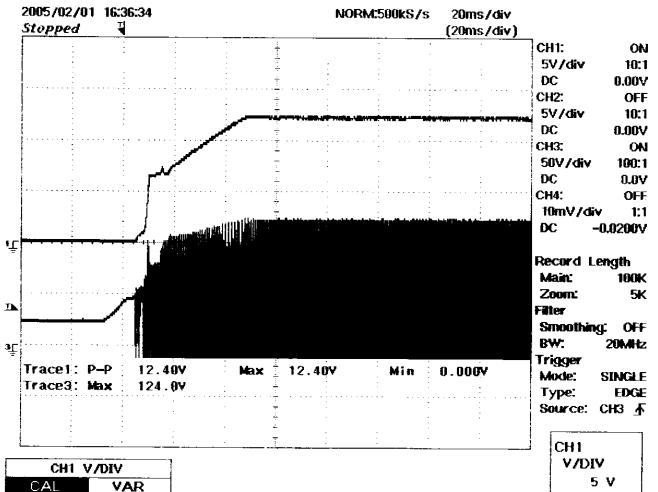


Figure 26 – Start-up Profile at Full Load, 48 VDC
Upper Ch1: 12 V output, 2 V / div,
Lower Ch3: Drain Voltage 50 V / div,
20 ms / div.




12 Conducted EMI

EMI was tested at room temperature and at 230 VAC input. An AC-DC (48 V output) adapter was plugged into the LISN (AC-output). The DC-DC converter (using DPA423) was plugged into the 48 VDC output from the AC-DC adapter.

In some tests the output of the DC-DC converter was left floating and in other cases the output (0 VDC) was connected to Earth ground.


12.1 230V High Line EMI

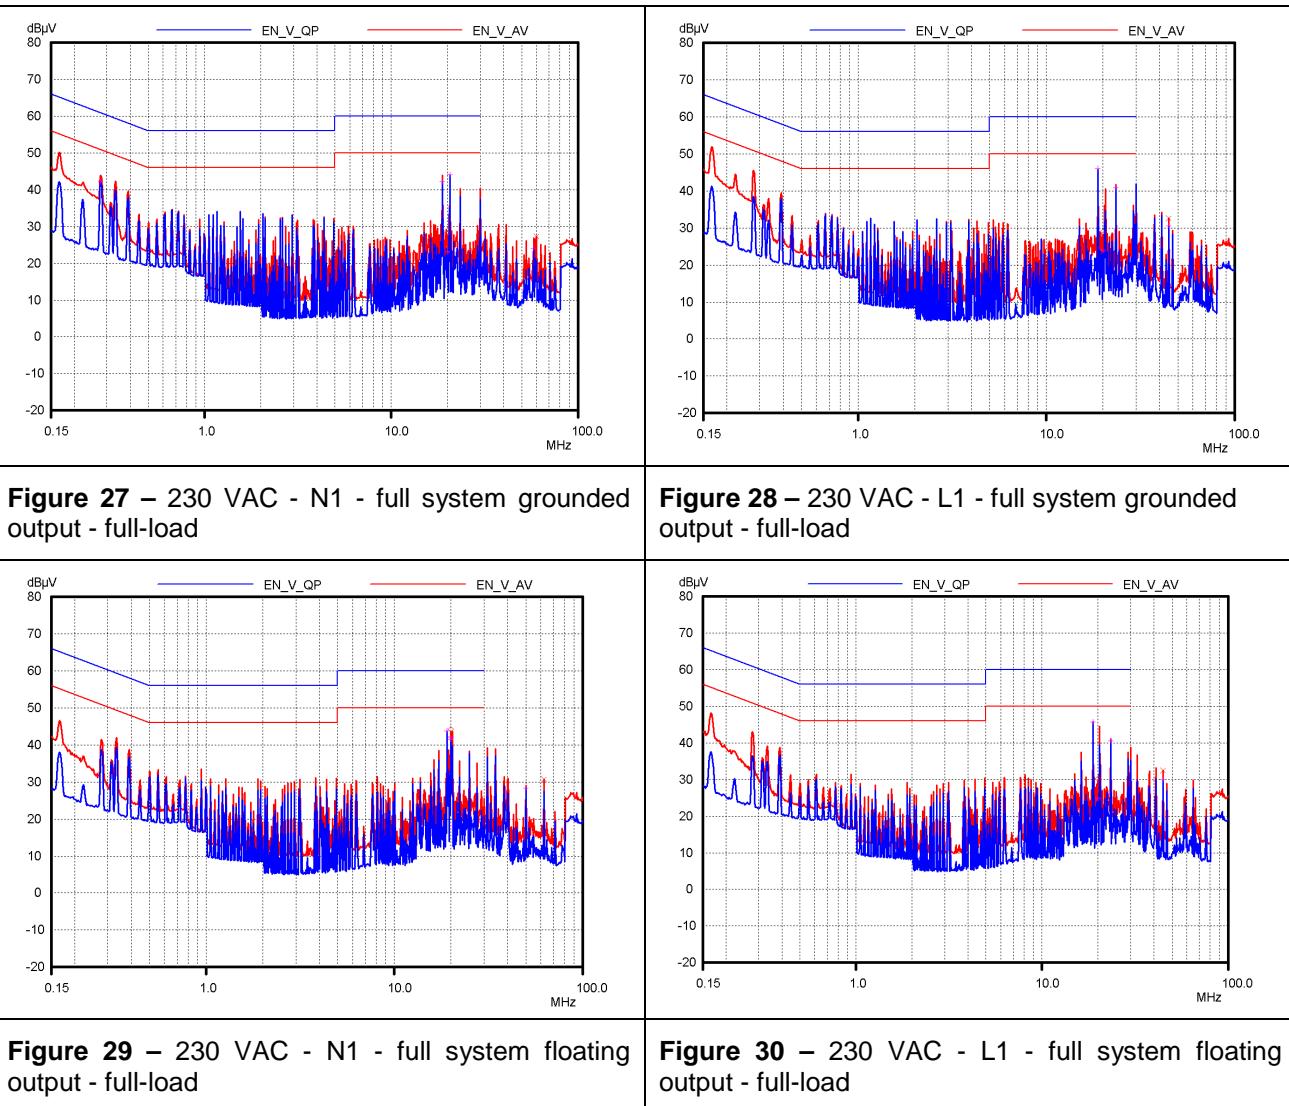

13 Radiated EMI scans

As can be seen from the radiated EMI scans below, the new board performs extremely well compared to the original DPA423 power supply. This is because of optimal layout and power supply filtering (including transformer shielding design).

The measurements were made in an open-field test site, with the AC-adapter (which outputs 48 VDC). This AC-adapter was connected to 115 VAC via a LISN and the output 48 VDC was input to the DPA423 DC-DC converter.

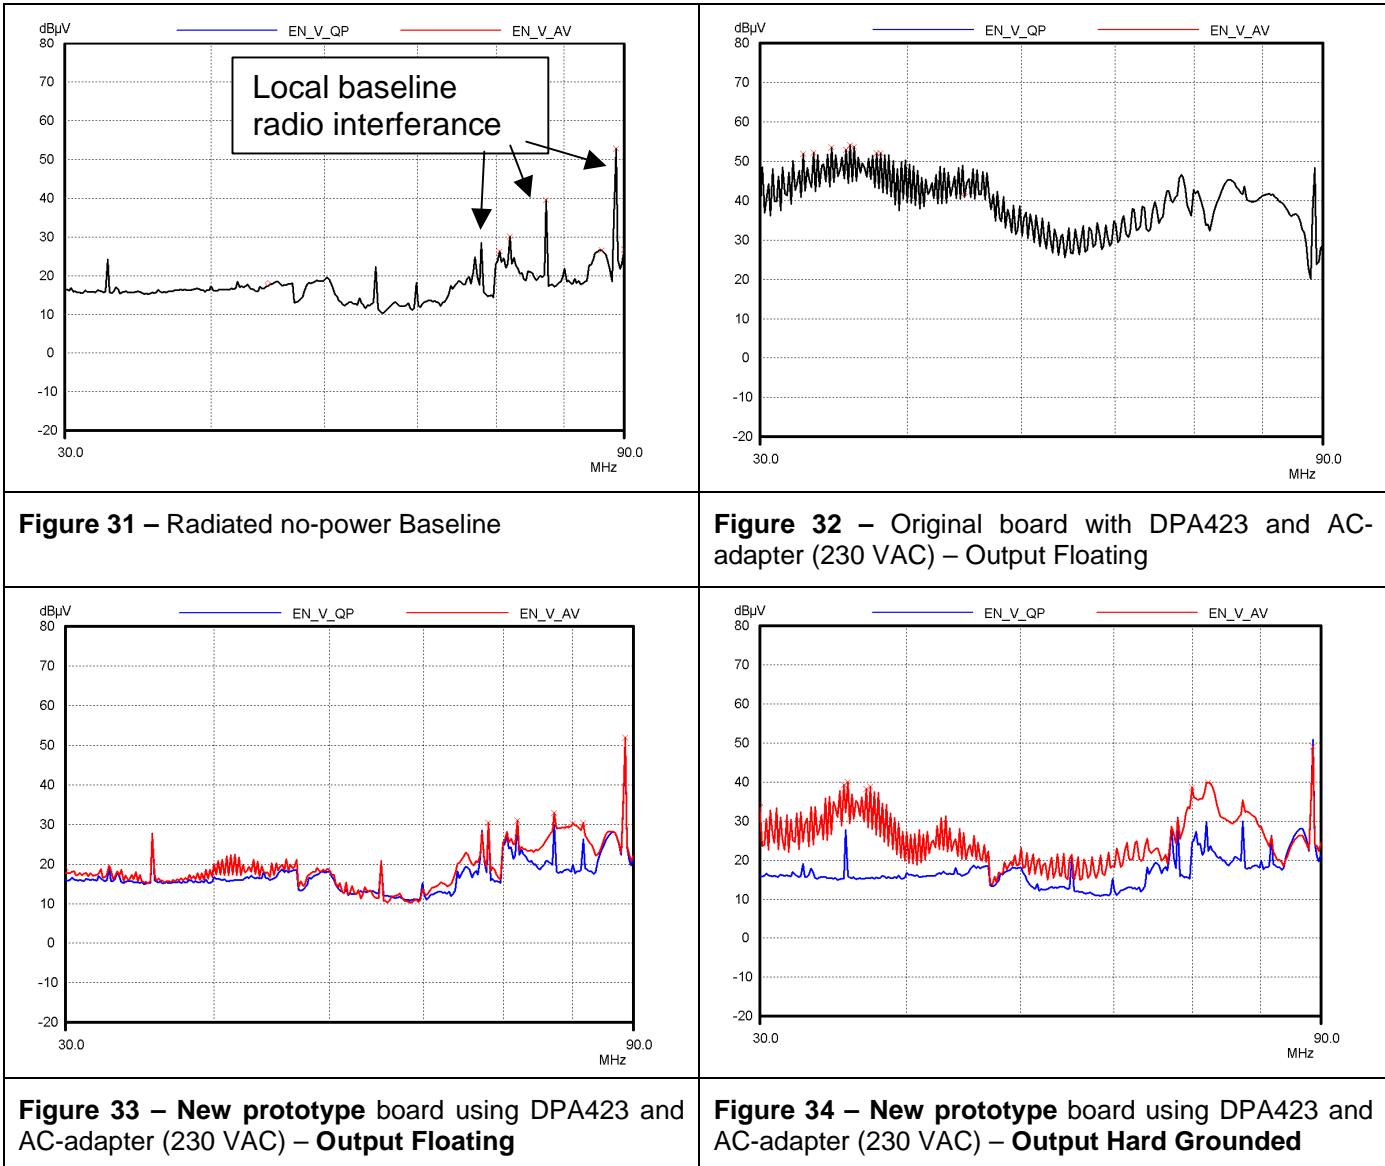

14 Revision History

Date	Author	Revision	Description & changes	Reviewed
September 12, 2005	RM	1.0	Initial release	VC / AM

For the latest updates, visit our Web site: www.powerint.com

Power Integrations may make changes to its products at any time. Power Integrations has no liability arising from your use of any information, device or circuit described herein nor does it convey any license under its patent rights or the rights of others. POWER INTEGRATIONS MAKES NO WARRANTIES HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

PATENT INFORMATION

The products and applications illustrated herein (including circuits external to the products and transformer construction) may be covered by one or more U.S. and foreign patents or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at www.powerint.com.

The PI Logo, **TOPSwitch**, **TinySwitch**, **LinkSwitch**, and **EcoSmart** are registered trademarks of Power Integrations. **PI Expert** and **DPA-Switch** are trademarks of Power Integrations.

© Copyright 2004, Power Integrations.

Power Integrations Worldwide Sales Support Locations

WORLD HEADQUARTERS

5245 Hellyer Avenue,
San Jose, CA 95138, USA
Main: +1-408-414-9200
Customer Service:
Phone: +1-408-414-9665
Fax: +1-408-414-9765
e-mail:
usasales@powerint.com

GERMANY

Rueckertstrasse 3,
D-80336, Munich, Germany
Phone: +49-895-527-3910
Fax: +49-895-527-3920
e-mail: eurosales@powerint.com

JAPAN

Keihin-Tatemono 1st Bldg.
12-20 Shin-Yokohama,
2-Chome,
Kohoku-ku, Yokohama-shi,
Kanagawa 222-0033, Japan
Phone: +81-45-471-1021
Fax: +81-45-471-3717
e-mail:
japansales@powerint.com

TAIWAN

17F-3, No. 510,
Chung Hsiao E. Rd., Sec. 5,
Taipei, Taiwan 110, R.O.C.
Phone: +886-2-2727-1221
Fax: +886-2-2727-1223
e-mail:
taiwansales@powerint.com

CHINA (SHANGHAI)

Rm 807, Pacheer,
Commercial Centre,
555 Nanjing West Road,
Shanghai, 200041, China
Phone: +86-21-6215-5548
Fax: +86-21-6215-2468
e-mail:
chinasonsales@powerint.com

INDIA (TECHNICAL SUPPORT)

Innovatech
261/A, Ground Floor
7th Main, 17th Cross,
Sadasivanagar
Bangalore, India, 560080
Phone: +91-80-5113-8020
Fax: +91-80-5113-8023
e-mail: indiasonsales@powerint.com

KOREA

8th Floor, DongSung Bldg.
17-8 Yido-dong,
Youngdeungpo-gu,
Seoul, 150-874, Korea
Phone: +82-2-782-2840
Fax: +82-2-782-4427
e-mail:
koreasonsales@powerint.com

UK (EUROPE & AFRICA HEADQUARTERS)

1st Floor, St. James's House
East Street
Farnham, Surrey GU9 7TJ
United Kingdom
Phone: +44-1252-730-140
Fax: +44-1252-727-689
e-mail: eurosonsales@powerint.com

CHINA (SHENZHEN)

Rm# 1705, Bao Hua Bldg.
1016 Hua Qiang Bei Lu,
Shenzhen, Guangdong,
518031, China
Phone: +86-755-8367-5143
Fax: +86-755-8377-9610
e-mail:
chinasonsales@powerint.com

ITALY

Via Vittorio Veneto 12, Bresso,
Milano,
20091, Italy
Phone: +39-028-928-6001
Fax: +39-028-928-6009
e-mail: eurosonsales@powerint.com

SINGAPORE

51 Newton Road,
#15-08/10 Goldhill Plaza,
Singapore, 308900
Phone: +65-6358-2160
Fax: +65-6358-2015
e-mail:
singaporesonsales@powerint.com

APPLICATIONS HOTLINE

World Wide +1-408-414-9660

APPLICATIONS FAX

World Wide +1-408-414-9760

ER or EPR template – Rev 3.6 – Single sided

