

MA2S374

Silicon epitaxial planar type

For CATV tuner


■ Features

- Small series resistance r_D
- SS-mini type package, allowing downsizing of equipment and automatic insertion through the taping package

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	34	V
Peak reverse voltage*	V_{RM}	35	V
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Note) * : $R_L = 10 \text{ k}\Omega$

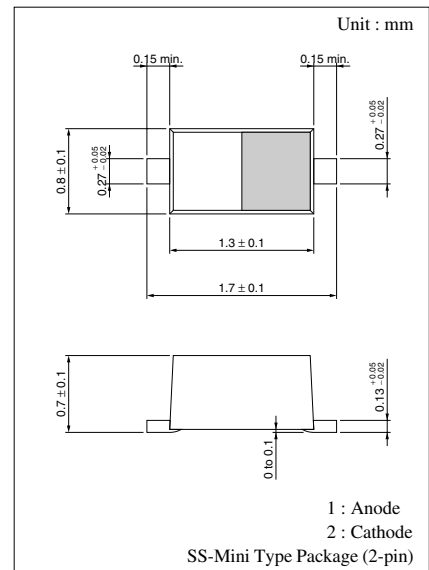

Marking Symbol: T

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse current (DC)	I_R	$V_R = 30 \text{ V}$			10	nA
Diode capacitance	$C_{D(0V)}$ *1	$V_R = 0 \text{ V}, f = 1 \text{ MHz}$	87			pF
	$C_{D(2V)}$	$V_R = 2 \text{ V}, f = 1 \text{ MHz}$	44.00		50.79	pF
	$C_{D(25V)}$	$V_R = 25 \text{ V}, f = 1 \text{ MHz}$	2.60		3.03	pF
	$C_{D(10V)}$	$V_R = 10 \text{ V}, f = 1 \text{ MHz}$	8.80		13.08	pF
	$C_{D(17V)}$	$V_R = 17 \text{ V}, f = 1 \text{ MHz}$	3.70		5.04	pF
Capacitance ratio	$C_{D(2V)}/C_{D(25V)}$		15.0			—
Diode capacitance deviation	ΔC	$C_{D(2V)(10V)(17V)(25V)}$			2.0	%
Series resistance*2	r_D	$C_D = 9 \text{ pF}, f = 470 \text{ MHz}$			0.9	Ω

Note) 1. Rated input/output frequency: 470 MHz

2. *1 : Measurement at Low Signal Level

*2 : r_f measuring instrument: YHP MODEL 4191A RF IMPEDANCE ANALYZER

