

**TRENCH SCHOTTKY RECTIFIER**  
*New GenIII D-61 Package*

**80 Amp**


**Major Ratings and Characteristics**

Characteristics	Value	Units
$I_{F(AV)}$ Rectangular waveform	80	A
$V_{RRM}$ range	20	V
$I_{FSM}$ @ $t_p=5\mu s$ sine	5300	A
$V_F$ @ 40Apk, $T_J=150^\circ C$ (per leg)	0.21	V
$T_J$ range	-55 to 150	$^\circ C$

**Description/ Features**

The center tap Schottky rectifier module series has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C  $T_J$  operation
- Center tap module
- Very low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- *New fully transfer-mould low profile, small footprint, high current package*

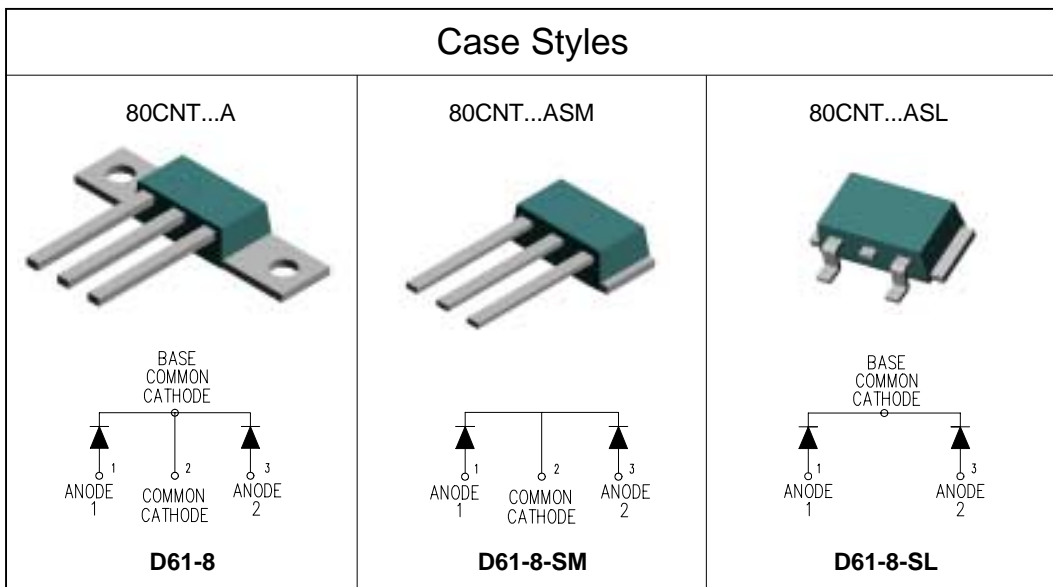

# 80CNT020A

Bulletin PD-20699 rev. A 12/02



## Voltage Ratings

Part number	80CNT020A	
$V_R$ Max. DC Reverse Voltage (V)	@ 125°C	20
	@ 150°C	13

## Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) (Per Device)	40 80	A	50% duty cycle @ $T_C = 137^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	5300 700	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated $V_{RRM}$ applied
$E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)	4.5	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1$ Amps, $L = 4.5$ mH
$I_{AR}$ Repetitive Avalanche Current (Per Leg)	1	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

## Electrical Specifications

Parameters	Typ	Max	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (Per Leg) (1)	0.33	0.37	V	@ 40A
	0.39	0.45		@ 80A
	0.24	0.27	T <sub>J</sub> = 125°C	@ 40A
	0.31	0.36		@ 80A
	0.21	0.25	T <sub>J</sub> = 150°C	@ 40A
	0.29	0.34		@ 80A
$I_{RM}$ Max. Reverse Leakage Current (Per Leg) (1)	2.5	5.0	mA	T <sub>J</sub> = 25°C
	640	950		T <sub>J</sub> = 125°C
	480	750		T <sub>J</sub> = 125°C
	530	800		T <sub>J</sub> = 125°C
	1630	2500		T <sub>J</sub> = 150°C
$C_T$ Max. Junction Capacitance (Per Leg)	-	5500	pF	$V_R = 10V_{DC}$ (test signal range 100KHz to 1MHz) 25°C
$L_S$ Typical Series Inductance (Per Leg)	-	5.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	-	10000	V/ $\mu\text{s}$	(Rated $V_R$ )

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

Parameters	80CNT	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 125	°C	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	°C	
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)	0.50	°C/W	DC Operation
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package)	0.42	°C/W	DC Operation
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink (D61-8 Only)	0.30	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	7.8 (0.28)	g (oz.)	
T Mounting Torque (D61-8 Only)	Min.	40 (35)	Kg-cm (lbf-in)
	Max.	58 (50)	

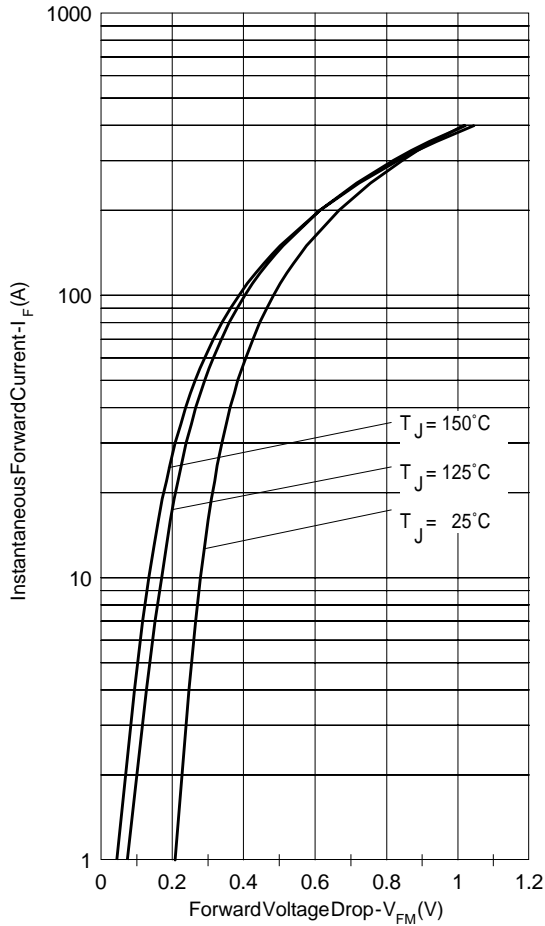


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

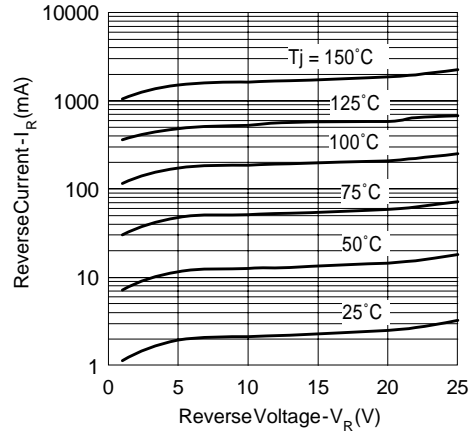


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

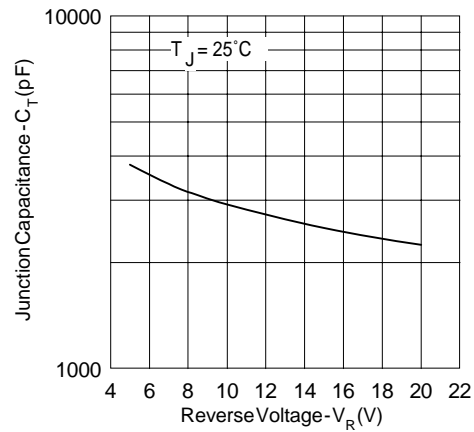


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

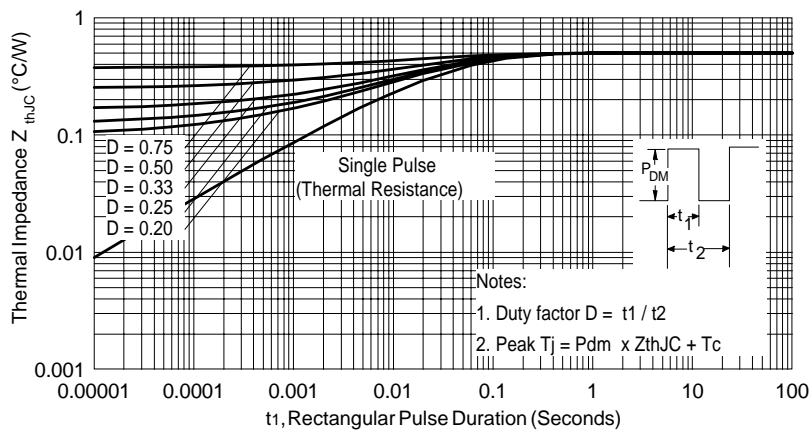


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

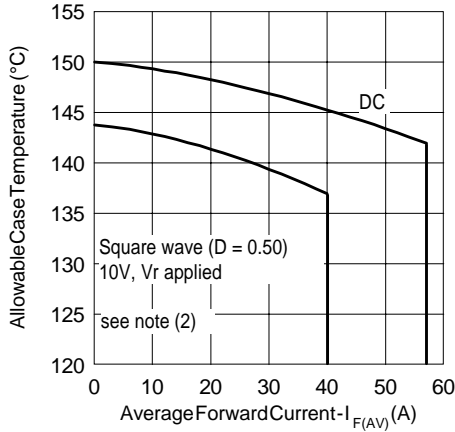


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

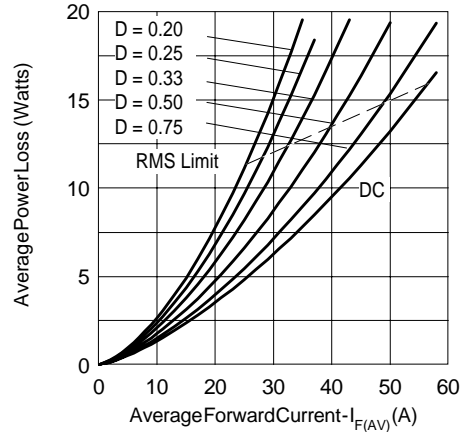


Fig. 6- Forward Power Loss Characteristics (Per Leg)

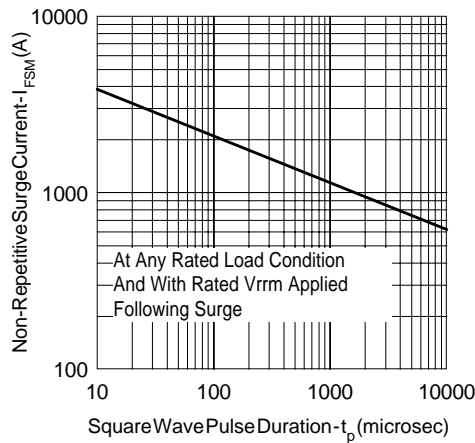


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

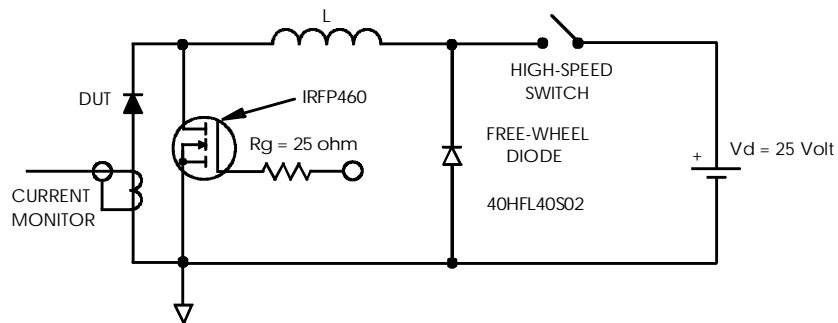


Fig. 8- Unclamped Inductive Test Circuit

(2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;

$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ 10V, V_R$  applied

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 12/02