

### FEATURES

- **SMALL PACKAGE OUTLINE:**  
SOT-363 package measures just 2.0 mm x 1.25 mm
- **LOW HEIGHT PROFILE:**  
Just 0.60 mm high
- **HIGH COLLECTOR CURRENT:**  
Ic MAX = 65 mA

### DESCRIPTION

The UPA822TF contains two NE681 NPN high frequency silicon bipolar chips. NEC's new low profile TF package is ideal for all portable wireless applications where reducing component height is a prime consideration. Each transistor chip is independently mounted and easily configured for oscillator/ buffer amplifier and other applications.



### ABSOLUTE MAXIMUM RATINGS<sup>1</sup> (TA = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
V <sub>CB0</sub>	Collector to Base Voltage	V	20
V <sub>CE0</sub>	Collector to Emitter Voltage	V	10
V <sub>EB0</sub>	Emitter to Base Voltage	V	1.5
I <sub>c</sub>	Collector Current	mA	65
PT	Total Power Dissipation		
	1 Die	mW	110
	2 Die	mW	200
T <sub>J</sub>	Junction Temperature	°C	150
T <sub>STG</sub>	Storage Temperature	°C	-65 to +150

Note: 1. Operation in excess of any one of these parameters may result in permanent damage.

### OUTLINE DIMENSIONS (Units in mm)

PACKAGE OUTLINE TS06 (Top View)

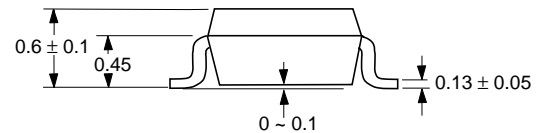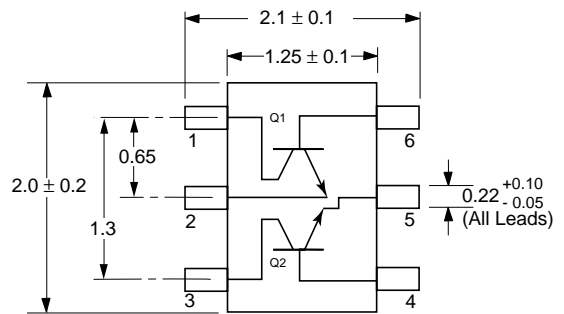

#### PIN CONNECTIONS

1. Collector (Q1)
2. Emitter (Q1)
3. Collector (Q2)
4. Base (Q2)
5. Emitter (Q2)
6. Base (Q1)

Note: Pin 1 is the lower left most pin as the package lettering is oriented and read left to right.

### ELECTRICAL CHARACTERISTICS (TA = 25°C)

PART NUMBER PACKAGE OUTLINE			UPA822TF TS06		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
I <sub>CBO</sub>	Collector Cutoff Current at V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0	μA			0.8
I <sub>EBO</sub>	Emitter Cutoff Current at V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0	μA			0.8
h <sub>FE</sub>	Forward Current Gain <sup>1</sup> at V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA		70	100	240
f <sub>T</sub>	Gain Bandwidth at V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz	GHz	4.5	7.0	
C <sub>re</sub>	Feedback Capacitance <sup>2</sup> at V <sub>CB</sub> = 3 V, I <sub>E</sub> = 0, f = 1 MHz	pF			0.9
S <sub>21E</sub>   <sup>2</sup>	Insertion Power Gain at V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz	dB	10	12	
NF	Noise Figure at V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz	dB		1.4	1.7
h <sub>FE1</sub> /h <sub>FE2</sub>	h <sub>FE</sub> Ratio: h <sub>FE1</sub> = Smaller Value of Q1, or Q2 h <sub>FE2</sub> = Larger Value of Q1 or Q2		0.85		

Notes: 1. Pulsed measurement, pulse width ≤ 350 μs, duty cycle ≤ 2 %.

2. The emitter terminal should be connected to the ground terminal of the 3 terminal capacitance bridge. For Tape and Reel version use part number UPA822TF-T1, 3K per reel.

## California Eastern Laboratories

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

**CEL** CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279  
24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE