


QSE156/157/158/159

PACKAGE DIMENSIONS

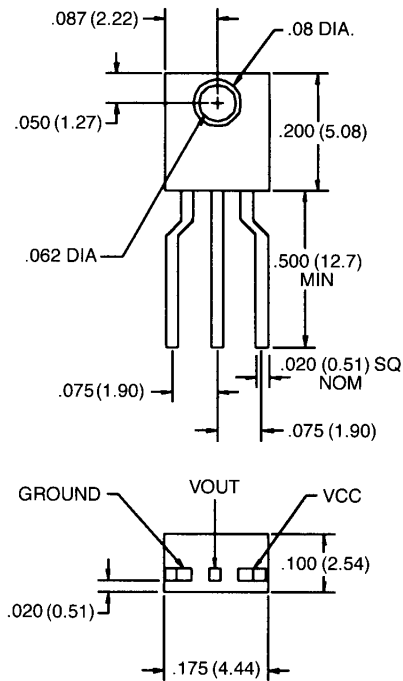

ST2151

- NOTES:
 1. DIMENSIONS ARE IN INCHES (mm).
 2. TOLERANCE IS $\pm .010$ (.25)
 UNLESS OTHERWISE SPECIFIED.

DESCRIPTION

The QSE15X family are OPTOLOGIC™ ICs which feature a Schmitt trigger at output which provides hysteresis for noise immunity and pulse shaping. The basic building block of this IC consists of a photodiode, a linear amplifier, voltage regulator, Schmitt trigger and four output options. The TTL/LSTTL compatible output can drive up to ten TTL loads over supply currents from 4.5 to 16.0 volts. The dark red epoxy packaging system is designed to optimize the mechanical resolution, coupling efficiency, cost, and reliability.

FEATURES

- High noise immunity.
- Direct TTL/LSTTL interface.
- Steel lead frames for improved solder mounting.
- Reception angle of $\pm 25^\circ$.




OPTOLOGIC™

| ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ Unless Otherwise Specified) | |
|--|---|
| Supply Voltage, V_{CC} | 18 volts |
| Storage Temperature | -40°C to $+100^\circ\text{C}$ |
| Operating Temperature | -40°C to $+85^\circ\text{C}$ |
| Soldering: | |
| Lead Temperature (Iron) | 240°C for 5 sec. ^(2,3,4,5) |
| Lead Temperature (Flow) | 260°C for 10 sec. ^(2,3,5) |
| Power Dissipation | 100 mW ⁽¹⁾ |
| Duration of Output short to V_{CC} | 1.00 sec. |
| Voltage at Output | 35 volts |
| Sinking Current | 50 mA |
| Sourcing Current (QSE156, QSE157) | 10 mA |
| Irradiance | 3.0 mW/cm^2 |


| ELECTRICAL CHARACTERISTICS ($T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$) ($V_{CC} = 4.5$ to 16 volts) | | | | | | |
|---|-------------|----------------|------|-------|------------------|---|
| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNITS | TEST CONDITIONS |
| Operating Supply Voltage | V_{CC} | 4.5 | | 16.0 | V | |
| Positive Going Threshold Irradiance ⁽⁶⁾ | Ee (+) | 0.025 | | 0.250 | mW/cm^2 | $T_A = 25^\circ\text{C}$ |
| Hysteresis Ratio | Ee(+)/Ee(-) | 1.10 | | 2.00 | | |
| Supply Current | I_{CC} | — | | 12.0 | mA | Ee = 0 or $.3 \text{ mW/cm}^2$ ⁽⁶⁾ |
| Peak to peak ripple which will cause false triggering | | — | | 2.00 | V | f = DC to 50 MHz |
| QSE156 (BUFFER TOTEM POLE) | | | | | | |
| High Level Output Voltage | V_{OH} | $V_{CC} - 2.1$ | | — | V | Ee = $.3 \text{ mW/cm}^2$, $I_{OH} = -1.0 \text{ mA}$ ⁽⁶⁾ |
| Low Level Output Voltage | V_{OL} | — | | 0.40 | V | Ee = 0, $I_{OL} = 16 \text{ mA}$ |
| QSE157 (INVERTER TOTEM POLE) | | | | | | |
| High Level Output Voltage | V_{OH} | $V_{CC} - 2.1$ | | — | V | Ee = 0, $I_{OH} = -1.0 \text{ mA}$ |
| Low Level Output Voltage | V_{OL} | — | | 0.40 | V | Ee = $.3 \text{ mW/cm}^2$, $I_{OL} = 16 \text{ mA}$ ⁽⁶⁾ |
| QSE158 (BUFFER OPEN COLLECTOR) | | | | | | |
| High Level Output Current | I_{OH} | — | | 100 | μA | Ee = $.3 \text{ mW/cm}^2$, $V_{OH} = 30 \text{ V}$ ⁽⁶⁾ |
| Low Level Output Voltage | V_{OL} | — | | 0.40 | V | Ee = 0, $I_{OL} = 16 \text{ mA}$ |
| QSE159 (INVERTER OPEN COLLECTOR) | | | | | | |
| High Level Output Current | I_{OH} | — | | 100 | μA | Ee = 0, $V_{OH} = 30 \text{ V}$ |
| Low Level Output Voltage | V_{OL} | — | | 0.40 | V | Ee = $.3 \text{ mW/cm}^2$, $I_{OL} = 16 \text{ mA}$ ⁽⁶⁾ |

| ELECTRICAL CHARACTERISTICS ($T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$) ($V_{CC} = 4.5$ to 16 volts) | | | | | | |
|---|--------------------|------|------|------|---------------|---|
| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNITS | TEST CONDITIONS |
| QSE156, QSE157 | | | | | | |
| Output rise, fall times | t_r, t_f | — | | 70 | nS | $E_e = 0$ or $.3 \text{ mW/cm}^2$, $f = 10\text{K Hz}$ DC=50%, $R_L = 10 \text{ TTL loads}^{(6)}$ |
| Propagation delay | t_{phl}, t_{plh} | | 6.0 | | μS | |
| QSE158, QSE159 | | | | | | |
| Output rise, fall times | t_r, t_f | — | | 100 | nS | $E_e = 0$ or $.3 \text{ mW/cm}^2$, $f = 10\text{K Hz}$ DC=50%, $R_L = 300\Omega^{(6)}$ |
| Propagation delay | t_{phl}, t_{plh} | | 6.0 | | μS | |

Switching Test Curve for Buffers

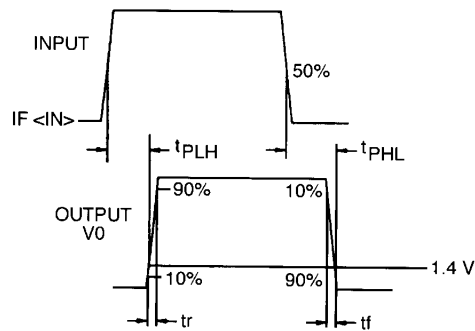

Switching Test Curve for Inverters

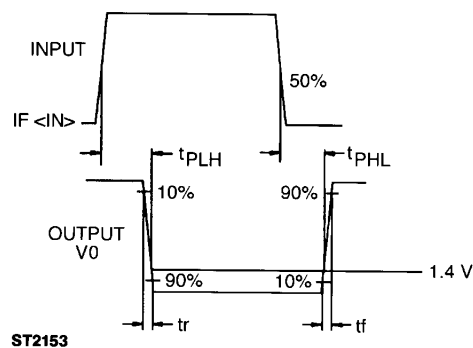


ST2153


NOTES

1. Derate power dissipation linearly $4.00 \text{ mW}/^\circ\text{C}$ above 25°C .
2. RMA flux is recommended.
3. Methanol or Isopropyl alcohols are recommended as cleaning agents.
4. Soldering iron tip $1/16"$ (1.6 mm) minimum from housing.
5. As long as leads are not under any stress or spring tension.
6. Irradiance measurements are made with an AlGaAs LED emitting light at a peak wavelength of 880 nm.


CIRCUIT SCHEMATICS

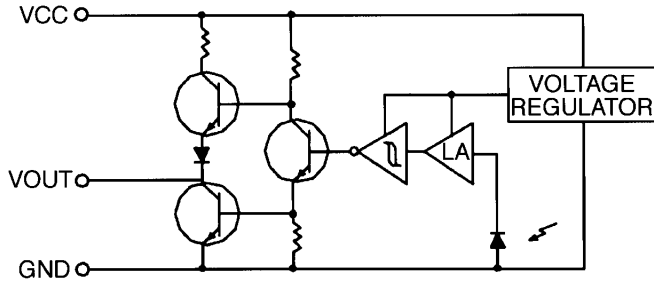


QSE156
Totem-Pole Output Buffer

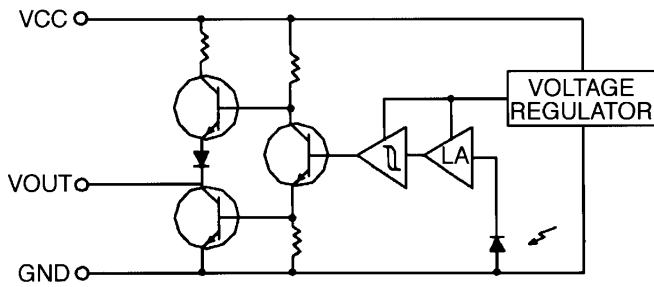

QSE157
Totem-Pole Output Inverter

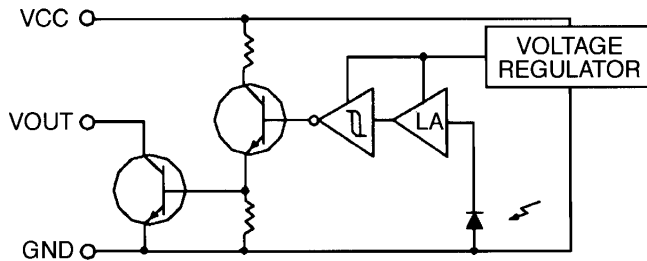

QSE158
Open-Collector Output Buffer

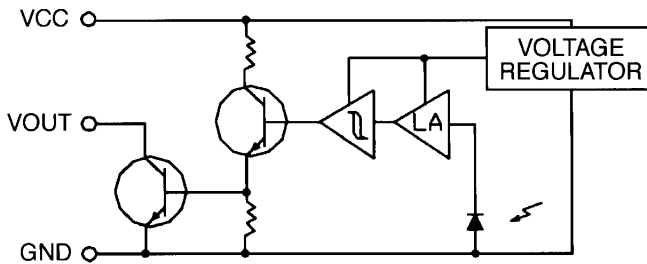

QSE159
Open-Collector Output Inverter