TOSHIBA Rectifier Silicon Diffused Type


# S5688B, S5688G, S5688J, S5688N

### General Purpose Rectifier Application

- Average forward current: If (AV) = 1.0 A
- Repetitive peak reverse voltage: VRRM = 100~1000 V

## **Maximum Ratings (Ta = 25°C)**

Characteristic		Symbol	Ratings	Unit	
	S5688B		100	V	
Repetitive peak reverse voltage	S5688G	\/	400		
	S5688J	$V_{RRM}$	600		
	S5688N		1000		
Average forward current		I <sub>F (AV)</sub>	1.0	Α	
Peak one cycle surge forward current (non repetitive)	S5688B S5688G	IFSM	40 (50 Hz)	A	
			49 (60 Hz)		
	S5688J S5688N		30 (50 Hz)		
			33 (60 Hz)		
Junction temperature		Tj	-40~150	°C	
Storage temperature range		T <sub>stg</sub>	-40~150	°C	

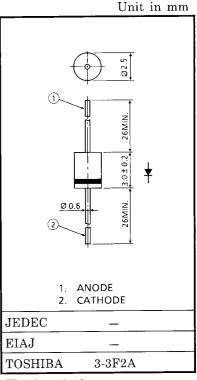


Weight: 0.18g

#### Electrical Characteristics (Ta = 25°C)

Characteristic	Symbol	Test condition	Min	Тур.	Max	Unit
Peak forward voltage	$V_{FM}$	I <sub>FM</sub> = 1.0 A	_	_	1.2	V
Repetitive peak reverse current	I <sub>RRM</sub>	V <sub>RRM</sub> = rated	_	_	10	μΑ

#### Marking

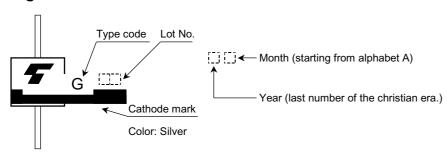

Code	Туре	
В	S5688B	
G	S5688G	
J	S5688J	
N	S5688N	

961001EAA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

  The information contained begins in property only use a quited for the applications of our products. No recognisibility is accounted by
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

