

GP1A18 High Sensitivity Type OPIC Photointerrupter

■ Features


1. Built-in Schmidt trigger circuit
 2. Low threshold input current
(I_{FLH} : MAX. 5mA)
 3. Operating supply voltage V_{cc} : 4.5~17V
 4. High sensing accuracy (Slit width : 0.5mm)
 5. TTL and CMOS compatible output
 6. Easy to mount on PWB due to compact and lightweight

■ Applications

1. Copiers, printers, facsimiles
 2. Optoelectronic switches, optoelectronic counters

■ Outline Dimensions

(Unit : mm)

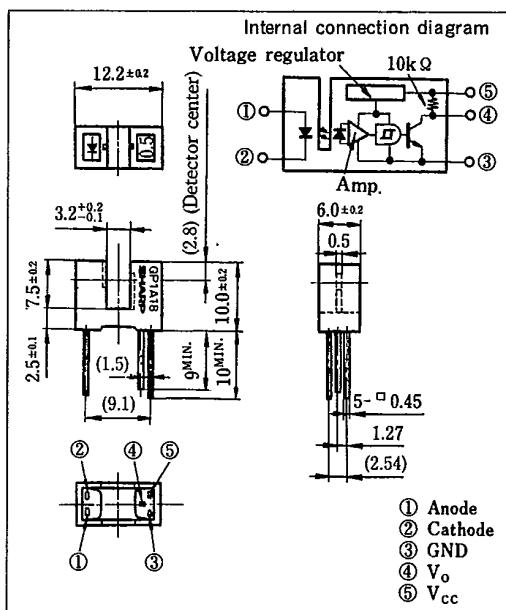

- * OPIC is a registered trademark of Sharp and stands for Optical IC. It has a light detecting element and signal processing circuitry integrated onto a single chip.

7

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	* ¹ Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	V
Output	Power dissipation	P	75	mW
	Supply voltage	V _{cc}	17	V
	Low level output current	I _{OL}	50	mA
Power dissipation		P _O	250	mW
Operating temperature		T _{opr}	-25 ~ +85	°C
Storage temperature		T _{stg}	-40 ~ +100	°C
* ² Soldering temperature		T _{sot}	260	°C

*1 Pulse width $\leq 100\mu s$, Duty ratio = 0.01

*2 For 5 seconds

■ Electro-optical Characteristics

T-41-73

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F =5mA	—	1.1	1.4	V
	Reverse current	I _R	V _R =3V	—	—	10	μA
Output	Operating supply voltage	V _{cc}		4.5	—	17	V
	Low level output voltage	V _{OL}	I _{OL} =16mA, V _{cc} =5V, I _F =0	—	0.15	0.4	V
	High level output voltage	V _{OH}	V _{cc} =5V, I _F =5mA	4.9	—	—	V
	Low level supply current	I _{CCL}	V _{cc} =5V, I _F =0	—	2.5	5.0	mA
Transfer characteristics	High level supply current	I _{CCH}	V _{cc} =5V, I _F =5mA	—	1.0	3.0	mA
	*3 "Low→High" threshold input current	I _{FLH}	V _{cc} =5V	—	1.0	5.0	mA
	**Hysteresis	I _{FHL} /I _{FLH}	V _{cc} =5V	0.55	0.75	0.95	
	"Low→High" propagation time	t _{PLH}	V _{cc} =5V I _F =5mA R _L =280Ω	—	3	9	μs
Response time	"High→Low" propagation time	t _{PHL}		—	5	15	
	Rise time	t _r		—	0.1	0.5	
	Fall time	t _f		—	0.05	0.5	

*3 I_{FLH} represents forward current when output changes from low to high.*4 I_{FHL} represents forward current when output changes from high to low.Hysteresis stands for I_{FHL}/I_{FLH}.

(Precautions for Use)

In order to stabilize power supply line, we recommend to connect a by-pass capacitor of more than $0.01\mu F$ between V_{cc} and GND near the device.

■ Recommended Operating Conditions

Parameter	Symbol	Operating temperature	MIN.	MAX.	Unit
Low level output current	I _{OL}	Ta=0~+70°C	—	16.0	mA
Forward current	I _F		10.0	20.0	mA

Fig. 1 Forward Current vs. Ambient Temperature






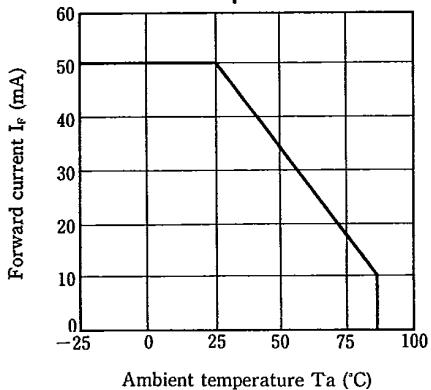


Fig. 2 Output Power Dissipation vs. Ambient Temperature

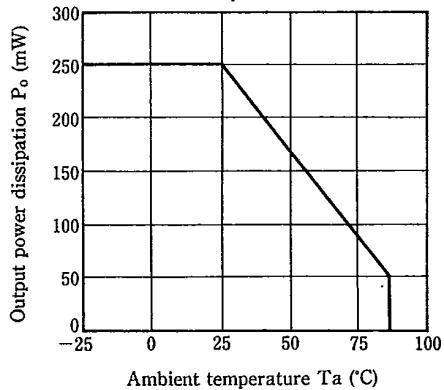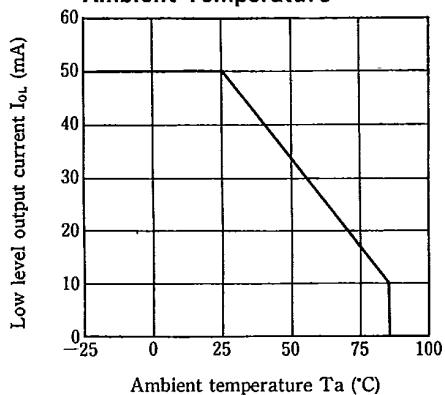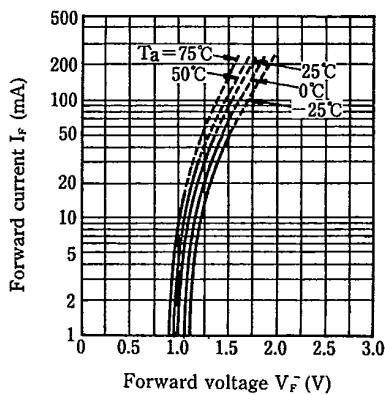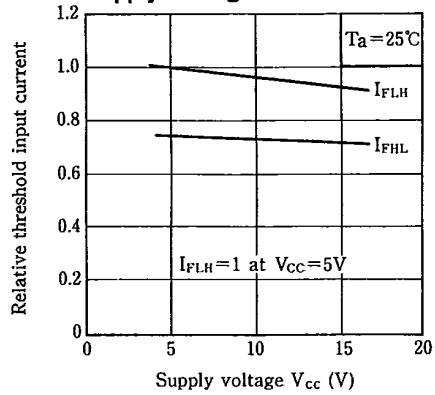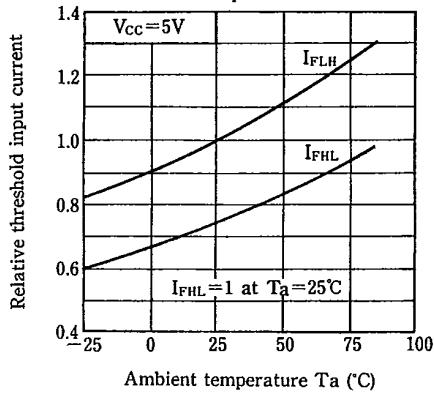

SHARP

Fig. 3 Low Level Output Current vs. Ambient Temperature**Fig. 4 Forward Current vs. Forward Voltage****Fig. 5 Relative Threshold Input Current vs. Supply Voltage****Fig. 6 Relative Threshold Input Current vs. Ambient Temperature**

7

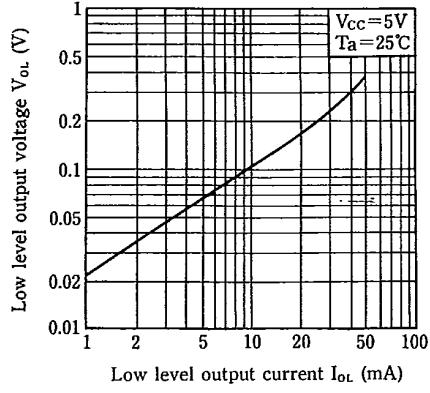
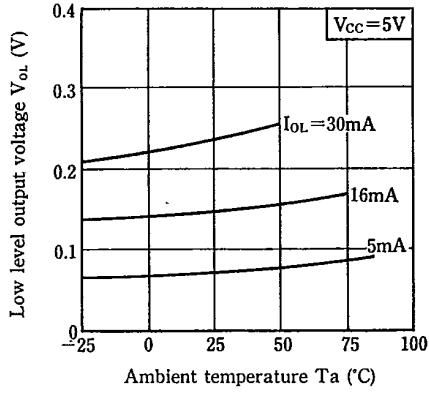
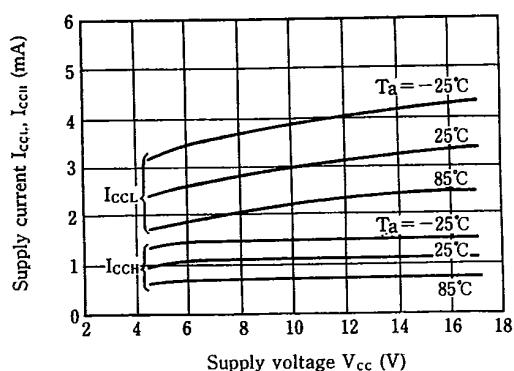
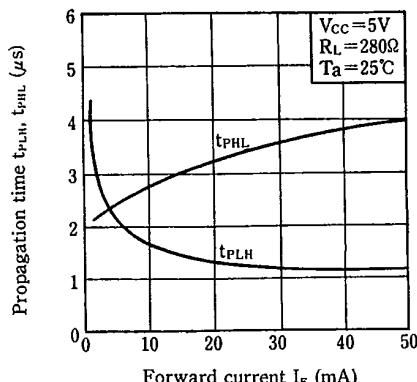
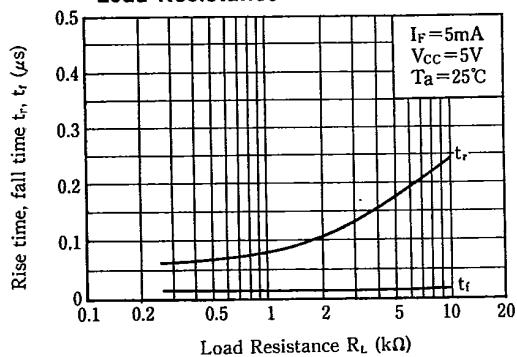
Fig. 7 Low Level Output Voltage vs. Low Level Output Current**Fig. 8 Low Level Output Voltage vs. Ambient Temperature**

Fig. 9 Supply Current vs. Supply Voltage**Fig. 10 Propagation Time vs. Forward Current****Fig. 11 Rise Time, Fall Time vs. Load Resistance****Test Circuit for Response Time**