



WTD0002

LCD Front Panel Controller

WTD0002
LCD Front Panel Controller

REV. 1.2
July.31,2001

The information in this document is subject to change without notice.

Weltrend Semiconductor, Inc. All Rights Reserved.

Weltrend Semiconductor Inc.

1

DESCRIPTION


The WTD0002 is a peripheral device for portable equipments; with Handshake Talk bus, 16X4 LCD driver, analogs scan key and 8-bit ADC for battery voltage detection.

This chip is suitable for variable portable products, especially for portable CD line-remote controller and DSC front panel controller.

FEATURE

- ✧ Single-chip LCD driver with Scan-key and ADC
- ✧ Maximum LCD drivers 16 segment x 4 common
- ✧ Selectable LCD driver duty: 1/2, 1/3 or 1/4 duty
- ✧ Selectable LCD driver bias: 1/2, 1/3 bias
- ✧ LCD blink mode support
- ✧ LCD and logic supplies may be separated
- ✧ 16- analog scan keys
- ✧ 1-channel 8-bit ADC for battery voltage detect use
- ✧ Buzzer/Alarm output function
- ✧ Three Line Handshake Talk bus interface
- ✧ Key wake up from power-stop function
- ✧ Interrupt function (ACK pin) can wake-up master MCU
- ✧ Compatible with any 4-bit, 8-bit or 16-bit MCU
- ✧ 2.4 to 5.5 V power supply range
- ✧ Low power consumption (<1uA @ power-stop mode)

PACKAGE PIN ASSIGNMENT

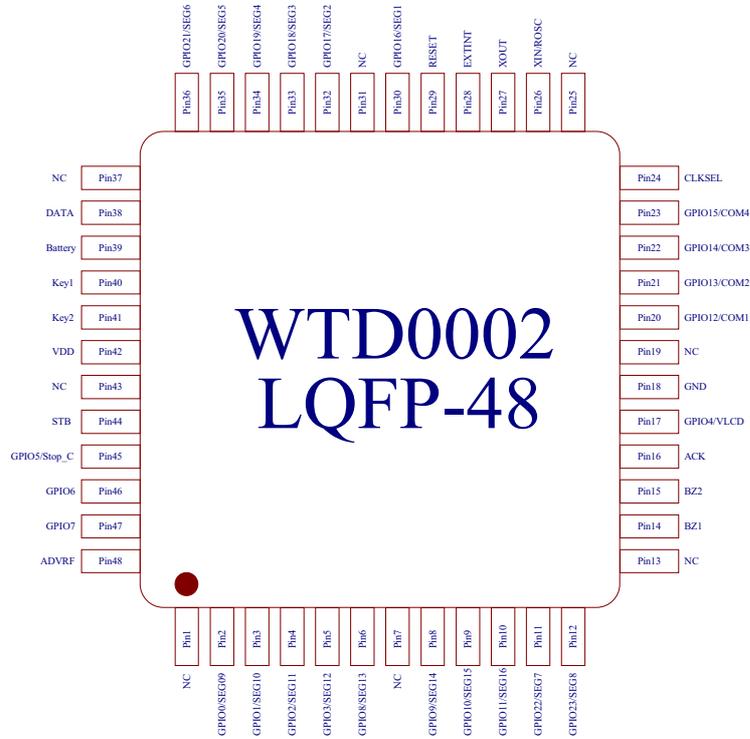



WTD0002

LCD Front Panel Controller

CHIP FORM PIN ASSIGNMENT



PIN DESCRIPTION

SYMBOL	48 PIN LQFP	40 PAD DICE	I/O	FUNCTION DISCRIPTION
NC	1	*	*	*
GPIO0/SEG9	2	6	I/O	GPIO0/LCD driver segment 9
GPIO1/SEG10	3	7	I/O	GPIO1/LCD driver segment 10
GPIO2/SEG11	4	8	I/O	GPIO2/LCD driver segment 11
GPIO3/SEG12	5	9	I/O	GPIO3/LCD driver segment 12
GPIO8/SEG13	6	10	I/O	GPIO8/LCD driver segment 13
NC	7	*	*	*
GPIO9/SEG14	8	11	I/O	GPIO19/LCD driver segment 14
GPIO10/SEG15	9	12	I/O	GPIO10/LCD driver segment 15
GPIO11/SEG16	10	13	I/O	GPIO11/LCD driver segment 16
GPIO22/SEG7	11	14	I/O	GPIO22/LCD driver segment 7
GPIO23/SEG8	12	15	O	GPIO23/LCD driver segment 8
NC	13	*	*	*
BZ1	14	16	O	4K/2KHz frequency Buzzer/Alarm output positive
BZ2	15	17	O	4K/2KHz frequency Buzzer/Alarm output negative
ACK	16	18	O	Acknowledage Output Pin
GPIO4/VLCD	17	19	I/O	GPIO4/LCD bias voltage
GND	18	20	P	Ground
NC	19	*	*	*
GPIO12/COM1	20	21	I/O	GPIO12/LCD driver common 1
GPIO13/COM2	21	22	I/O	GPIO13/LCD driver common 2
GPIO14/COM3	22	23	I/O	GPIO/14LCD driver common 3
GPIO15/COM4	23	24	I/O	GPIO/15LCD driver common 4
CLKSEL	24	25	I	Connect to VDD
NC	25	*	*	*
XIN	26	26	I	Pull-up 10K ohm resistor
XOUT	27	27	O	Oscillator clock output
EXTINT	28	28	I	EXTINT Interrupt Input Pin
RESET	29	29	I	System reset pin
GPIO16/SEG1	30	30	I/O	GPIO16/LCD driver segment 1
NC	31	*	*	*
GPIO17/SEG2	32	31	I/O	GPIO17/LCD driver segment 2



WTD0002

LCD Front Panel Controller

GPIO18/SEG3	33	32	I/O	GPIO18/LCD driver segment 3
GPIO19/SEG4	34	33	I/O	GPIO19/LCD driver segment 4
GPIO20/SEG5	35	34	I/O	GPIO20/LCD driver segment 5
GPIO21/SEG6	36	35	I/O	GPIO21/LCD driver segment 6
NC	37	*	*	*
DATA	38	36	I/O	Data in/out Pin
BATTERY	39	37	I	Battery voltage detect pin
KEY1	40	38	I	Switch 0~7 input pin
KEY2	41	39	I	Switch 8~F input pin
VDD	42	40	P	VCC power
NC	43	*	*	*
STB	44	1	I	Strob Input Pin
GPIO5/STOP_C	45	2	I/O	Output "0" at power-stop mode
GPIO6	46	3	I/O	General purpose I/O pin6
GPIO7	47	4	I/O	General purpose I/O pin7
ADVRF	48	5	P	ADC reference voltage input

***NOTE:** I: Input O: Output I/O: Input & Output P: Power Connect pin

*: No use