

Features

- 100W isolated output
- Efficiency of 82%
- 350KHz switching frequency
- 4:1 input range
- Regulated output
- Continuous short circuit protection
- Five-sided metal case
- Industry standard half-brick package



Model Number	Input Voltage	Output Voltage	Output Current	Ripple and Noise mV-RMS	mVp-p	Efficiency
VHB100W-Q24-S12	9-36VDC	12VDC	8.3A	60mV	150mV	82%

Input


Input Voltage Range	24V	9-36V
Positive Logic Remote ON/OFF	Logic Compatibility: Open Collector reference to -Vin Module ON: Open Circuit Module OFF: < 0.8VDC	
Input Filter	PI Type	

Output

Voltage Accuracy	±1% max.
Transient Response: 25% Step Load Change	<500µ sec.
External Trim Adj. Range	±10%
Ripple & Noise 20MHz BW	60mV RMS max. 150mVp-p max.
Short Circuit Protection	Continuous
Line Regulation ¹	±0.2% max
Load Regulation ²	±0.2% max
Over Voltage Protection trip Range, % Vo nom.	115-140%
Current Limit	110-140% Nominal Output

General Specifications

Efficiency	82%
Switching Frequency	350KHz, Typ.
Operating Case Temperature	-40°C to 100°C
Storage Temperature	-40°C to 105°C
Thermal Shutdown, Case Temp.	100°C Typ.
Dimensions	2.28x2.40x0.50 inches 57.9x61.0x12.7mm
Case Material	aluminum baseplate w/ plastic case

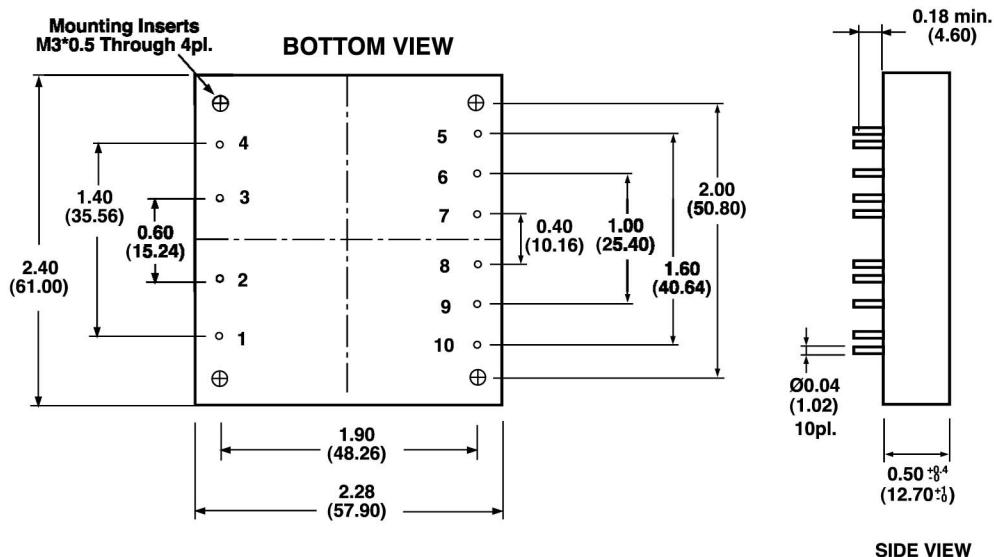


Pin	Function
1	+Vin
2	On/Off
3	CASE
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

Application Notes

Derating:

The operating case temperature range of the VHB100W series is -40°C to +100°C. When operating the VHB100W, proper derating or cooling is needed. Following is the derating curve of VHB100W without heat sink.

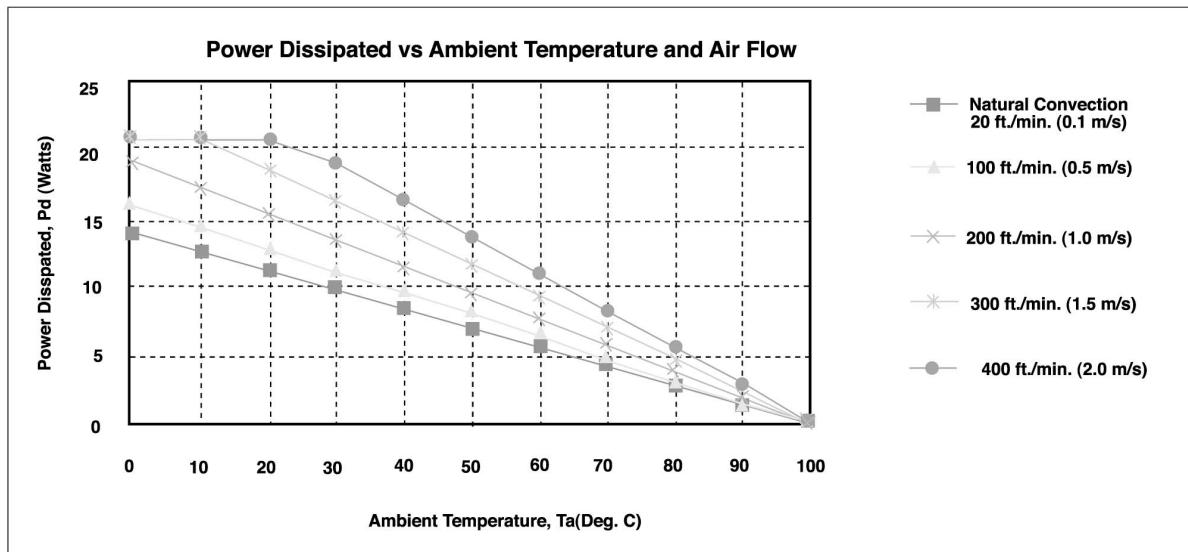

Forced Convection Power Derating without Heat Sink

Where:

The power dissipation (P_d) is

$$P_d = P_i - P_o = P_o (1 - \eta) / \eta$$

The thermal resistances are listed below.


AIR FLOW RATE	TYPICAL R_{ca}
Natural Convection 20 ft./min. (0.1 m/s)	7.12 °C/W
100 ft./min.	6.21 °C/W
200 ft./min.	5.17 °C/W
300 ft./min.	4.29 °C/W
400 ft./min.	3.64 °C/W

The temperature rise (ΔT):

$$\Delta T = P_d * R_{ca}$$

Remote On/Off Control

The VHB100W series allows the user to switch the module on and off electronically with the remote on/off feature. Logic control defaults to "positive" logic. The diagram shows the recommended circuits for positive logic. The "negative logic" option is also available.

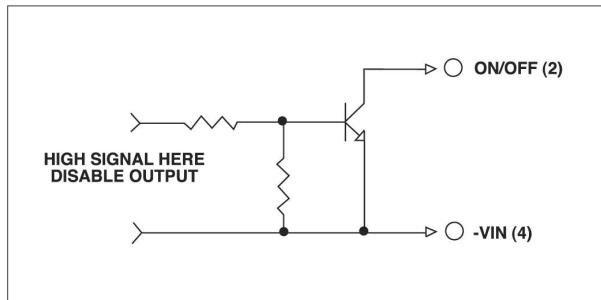


Logic Table

Logic State (PIN 2)	Negative Logic	Positive Logic
Logic Low - Switch Closed	Module on	Module off
Logic High - Switch Open	Module off	Module on


External Output Trimming

Output may optionally be trimmed ($\pm 10\%$) with external fixed resistors or an external trimpot as shown.

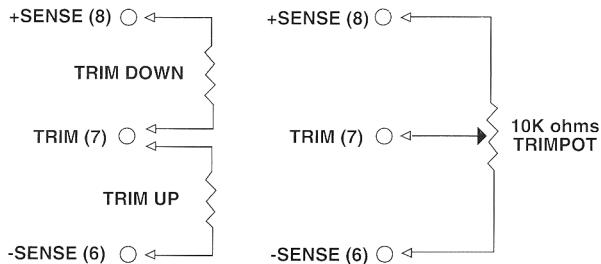

Output Noise

The output noise is measured with a $10\mu\text{F}$ tantalum capacitor and a $1.0\mu\text{F}$ ceramic capacitor across the output.

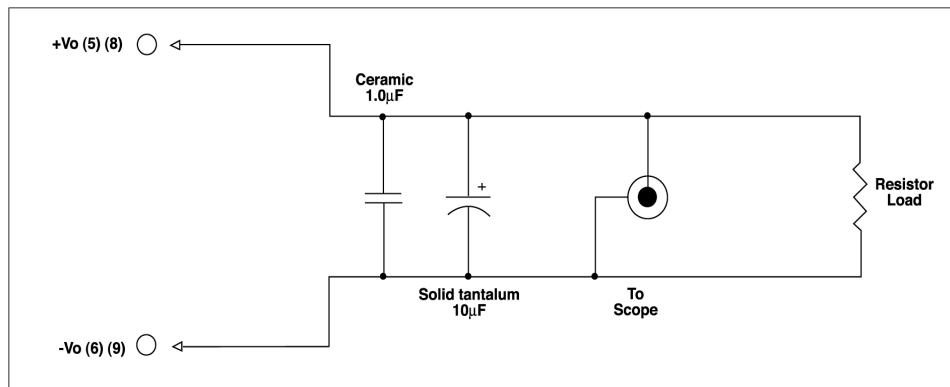

Output Noise Test Circuit schematic