


AXIAL TYPE LED LAMPS

LVG9353

DATA SHEET

- DOC. NO : <u>QW0905-LVG9353</u>
- REV : <u>A</u>_____
- DATE : <u>13 Jul. 2005</u>



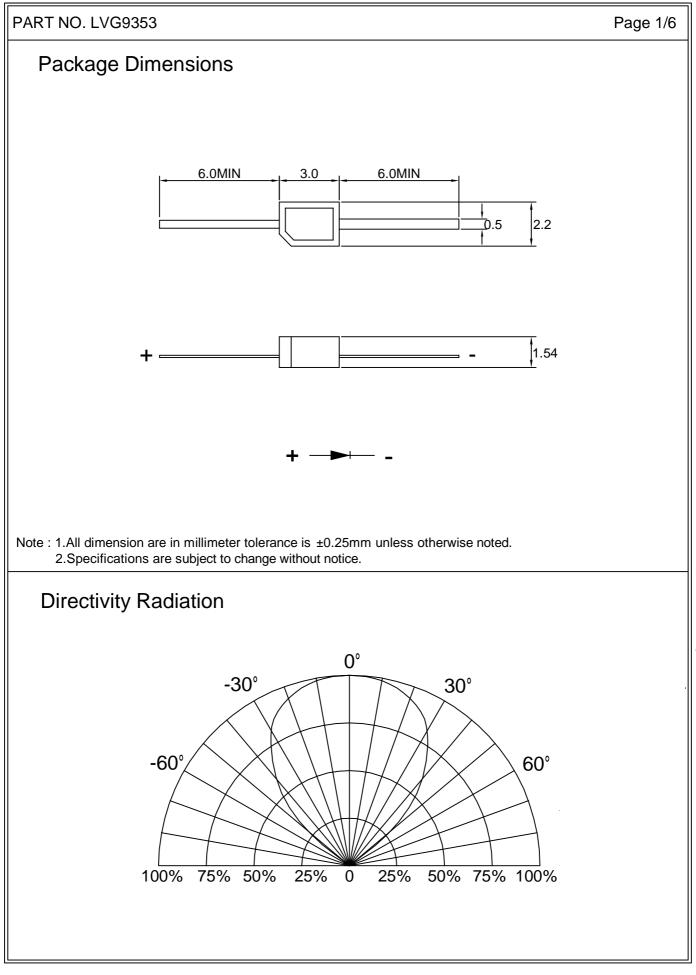



PART NO. LVG9353

Page 2/6

Absolute Maximum Ratings at Ta=25

| Parameter | Symbol | Absolute Maximum Ratings | |
|---|--------|--------------------------|------|
| | | VG | UNIT |
| Forward Current | lf | 30 | mA |
| Peak Forward Current Duty 1/10@10KHz | IFP | 120 | mA |
| Power Dissipation | PD | 100 | mW |
| Reverse Current @5V | lr | 10 | μA |
| Operating Temperature | Topr | -40 ~ +85 | |
| Storage Temperature | Tstg | -40 ~ +100 | |
| Soldering Temperature | Tsol | Max 260 for 5 sec Max | |

Typical Electrical & Optical Characteristics (Ta=25)


| PART NO | MATERIAL | COLOR | | Peak wave length Pnm | Spectral halfwidth nm | Forv volt @20n | age | Lumi inter @20m/ | nsity | Viewing angle 2 1/2 (deg) |
|---------|----------|---------|-------------|-------------------------------|-----------------------------|----------------------|------|------------------------|-------|------------------------------------|
| | | Emitted | Lens | | | Min. | Max. | Min. | Тур. | |
| LVG9353 | GaP | Green | Water Clear | 565 | 30 | 1.7 | 2.6 | 12 | 20 | 84 |

Note : 1.The forward voltage data did not including ±0.1V testing tolerance.2. The luminous intensity data did not including ±15% testing tolerance.




Page 3/6

PART NO. LVG9353

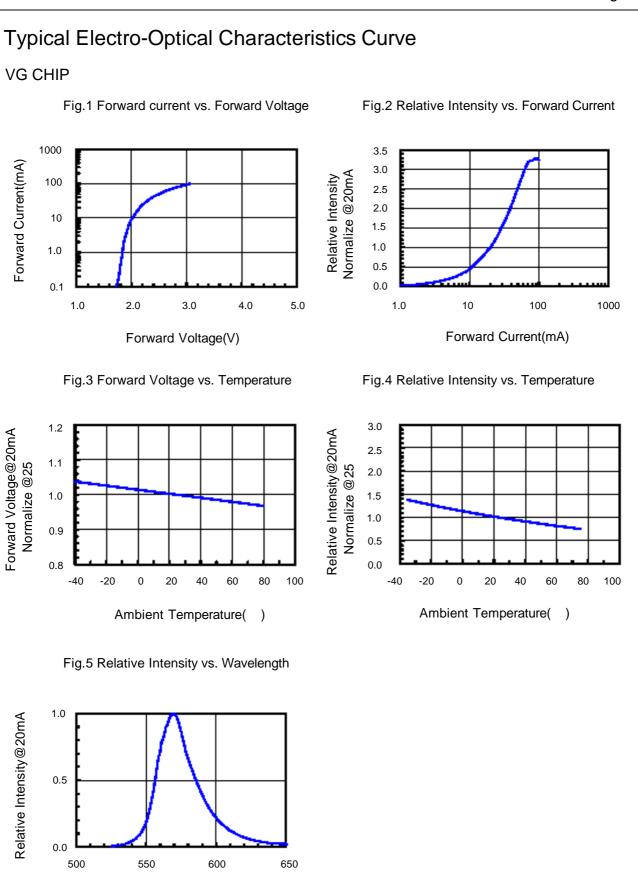

Wavelength (nm)



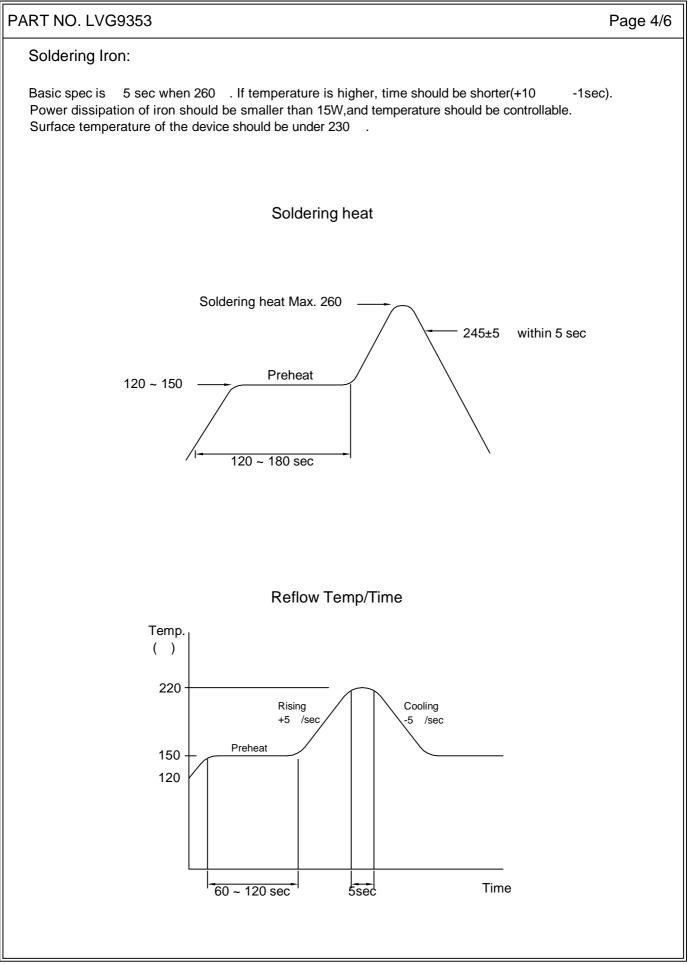



PART NO. LVG9353

Page 5/6

| Precautions For Use: Storage time: 1. The operation of Temperatures and RH are : 5 -35 ,RH60%. 2. Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp proof box with descanting agent. Considering the tape life, we suggest our customers to use our products within a year(from production date). 3. If opened more than one week in an atmosphere 5 - 35 ,RH60%, they should be treated at 60 ±5 for 15hrs. Drive Method: LED is a current operated device, and therefore, requirer some kind of current limiting resistor placed into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED. Consider worst case voltage variations than could occur across the current limiting resistor. The forwer current should not be allowed to change by more than 40% of its desired value. Circuit model A Circuit model B | | <u> </u> |
|--|---|----------|
| 1. The operation of Temperatures and RH are: 5 -35 ,RH60%. 1. The operation of Temperatures and RH are: 5 -35 ,RH60%. Chore the package is opened, the products should be used on the damp proof box with descanting agent. Considering the tape life, we suggest our customers to use our products within a year (from production date). 3. If opened more than one week in an atmosphere 5 - 35 ,RH60%. The yound be treated at 60 ±5 for 15hrs. Drive Method: Dis a current operated device, and therefore, requirer some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the 1D. Consider worst case voltage variations than could occur across the current limiting resistor. The forw of current should not be allowed to change by more than 40% of its desired value. (if curit model A current to be allowed to change by more than 40% of its desired value. (if curit model A current imiting typically takes the form of a current limiting resistor. The forw of current should not be allowed to change by more than 40% of its desired value. (if curit model A current imiting typically takes the form of a current limiting resistor. The forw of current should not be allowed to change by more than 40% of its desired value. (if curit model A current imiting typically takes the form of a current limiting resistor. The forw of current is thould not be allowed to change by more than 40% of its desired value. (if current model A current imiting typically takes the form of a current limiting resistor. (if current model A current imiting typically takes the form of a current limiting resistor. (if current model A current imiting typically takes the form of a current limiting resistor. (if current current operated current imiting typically takes the form of a current imiting typically takes the form of a current | Precautions For Use: | |
| a. A. one the package is opened, the products should be used within a weak. Cherwise, they should be kept in a damp proof box with descanting agent. Considering the tape life, we suggest our customers to use our products within a year(from production date). b. a pened more than one week in an atmosphere 5 and 5 and | Storage time: | |
| Cherwise, they should be kept in a damp proof box with descanting agent. Considering the tape life, we suggest our customers to use our products within a year(from production date). 3.If opened more than one week in an atmosphere 5 ~ 35 ,RH60%, they should be treated at 60 ±5 for 15hrs. Drive Method: LED is a current operated device, and therefore, requirer some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED. Consider worst case voltage variations than could occur across the current limiting resistor. The forwrd current should not be allowed to change by more than 40% of its desired value. (A) Recommended circuit. (B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED. Cleaning: Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. | 1. The operation of Temperatures and RH are : 5 \sim 35 , RH60%. | |
| they should be treated at 60 ±5 for 15hrs. Drive Method: LED is a current operated device, and therefore, requirer some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED. Corcuit model A circuit model A circuit model B (A) Recommended circuit. (B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED. Cleaning: Lea alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | Otherwise, they should be kept in a damp proof box with descanting agent. Considering the tape life, we suggest our customers to use our products within | |
| LED is a current operated device, and therefore, requirer some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED. Construct case voltage variations than could occur across the current limiting resistor. The forwrd current should not be allowed to change by more than 40% of its desired value. Circuit model A Circuit model B Circuit model Circuit. (A) Recommended circuit. (B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED. Cleaning: Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | • | |
| the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED. Consider worst case voltage variations than could occur across the current limiting resistor. The forwrd current should not be allowed to change by more than 40% of its desired value. Circuit model A Circuit model B Circuit model Circuit. (A) Recommended circuit. (B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED. Cleaning: Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. ESD(Electrostatic Discharge): Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | Drive Method: | |
| Circuit model A Circuit model B Circuit model A Circuit model B Circuit model A Circuit model B Circuit A Circuit Model B Circuit A Circuit A Ci | the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in serie with the LED. Consider worst case voltage variations than could occur across the current limiting resistor. The forwrd | |
| (A) Recommended circuit. (B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED. Cleaning: Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. ESD(Electrostatic Discharge): Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic | | |
| (A) Recommended circuit. (B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED. Cleaning: Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. ESD(Electrostatic Discharge): Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | Circuit model A Circuit model B | |
| (B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED. Cleaning: Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. ESD(Electrostatic Discharge): Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | | |
| Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. ESD(Electrostatic Discharge): Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | | |
| ESD(Electrostatic Discharge): Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | Cleaning: | |
| Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic | Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED. | |
| | ESD(Electrostatic Discharge): | |
| glove is recommended when handing these LED. All devices, equipment and machinery must be properly grounded. | glove is recommended when handing these LED. All devices, equipment and machinery must be proper | |



PART NO. : LVG9353

Reliability Test:

Page 6/6

| Test Item | Test Condition | Description | Reference Standard |
|--|--|---|--|
| Operating Life Test | 1.Under Room Temperature 2.If=20mA 3.t=1000 hrs (-24hrs, +72hrs) | This test is conducted for the purpose of detemining the resisance of a part in electrical and themal stressed. | MIL-STD-750: 1026 MIL-STD-883: 1005 JIS C 7021: B-1 |
| High Temperature Storage Test | 1.Ta=105 ±5 2.t=1000 hrs (-24hrs, +72hrs) | The purpose of this is the resistance of the device which is laid under ondition of high temperature for hours. | MIL-STD-883:1008 JIS C 7021: B-10 |
| Low Temperature Storage Test | 1.Ta=-40 ±5 2.t=1000 hrs (-24hrs, +72hrs) | The purpose of this is the resistance of the device which is laid under condition of low temperature for hours. | JIS C 7021: B-12 |
| High Temperature High Humidity Test | 1.Ta=65 ±5 2.RH=90 %~95 % 3.t=240hrs ±2hrs | The purpose of this test is the resistance of the device under tropical for hous. | MIL-STD-202:103B JIS C 7021: B-11 |
| Thermal Shock Test | 1.Ta=105 ±5 &-40 ±5 (10min) (10min) 2.total 10 cycles | The purpose of this is the resistance of the device to sudden extreme changes in high and low temperature. | MIL-STD-202: 107D MIL-STD-750: 1051 MIL-STD-883: 1011 |
| Solder Resistance Test | 1.T.Sol=260 ±5 2.Dwell time= 10 ±1sec. | This test intended to determine the thermal characteristic resistance of the device to sudden exposures at extreme changes in temperature when soldering the lead wire. | MIL-STD-202: 210A MIL-STD-750: 2031 JIS C 7021: A-1 |
| Solderability Test 1.T.Sol=230 ±5 2.Dwell time=5±1sec | | This test intended to see soldering well performed or not. | MIL-STD-202: 208D MIL-STD-750: 2026 MIL-STD-883: 2003 JIS C 7021: A-2 |