


●RLZJ Series (P=400mW Package : LL-34)

Series Prefix	Nominal Zener voltage	Vz (V)			Iz (mA)	Zz (Ω) Max.	Iz (mA)	IR (μA) Max.	VR (V)
		Ranking							
		A	B	C					
RLZJ	3.6	3.40~3.65	3.55~3.80	—	5	130	5	10	1.0
RLZJ	3.9	3.70~3.97	3.87~4.10	—	5	130	5	10	1.0
RLZJ	4.3	4.00~4.23	4.13~4.35	4.25~4.50	5	130	5	10	1.0
RLZJ	4.7	4.40~4.63	4.53~4.76	4.66~4.90	5	130	5	10	1.0
RLZJ	5.1	4.80~5.07	4.97~5.24	5.14~5.40	5	130	5	5	1.5
RLZJ	5.6	5.30~5.63	5.43~5.81	5.61~6.00	5	80	5	5	2.5
RLZJ	6.2	5.80~6.20	6.00~6.39	6.19~6.60	5	50	5	2	3.0
RLZJ	6.8	6.40~6.80	6.60~7.02	6.82~7.20	5	30	5	2	3.5
RLZJ	7.5	7.00~7.43	7.23~7.66	7.46~7.90	5	30	5	2	4.0
RLZJ	8.2	7.70~8.16	7.96~8.43	8.23~8.70	5	30	5	2	5.0
RLZJ	9.1	8.50~9.00	8.80~9.30	9.10~9.60	5	30	5	2	6.0
RLZJ	10	9.40~9.93	9.73~10.26	10.06~10.60	5	30	5	2	7.0
RLZJ	11	10.40~10.98	10.73~11.26	11.06~11.60	5	30	5	2	8.0
RLZJ	12	11.40~11.93	11.73~12.26	12.06~12.60	5	35	5	2	9.0
RLZJ	13	12.40~13.08	12.88~13.57	13.37~14.10	5	35	5	2	10.0
RLZJ	15	13.80~14.63	14.33~15.11	14.81~15.60	5	40	5	2	11.0
RLZJ	16	15.30~16.10	15.80~16.60	16.30~17.10	5	40	5	2	12.0
RLZJ	18	16.80~17.76	17.46~18.43	18.13~19.10	5	45	5	2	13.0
RLZJ	20	18.80~19.78	19.48~20.46	20.16~21.20	5	50	5	2	15.0
RLZJ	22	20.80~21.88	21.48~22.56	22.16~23.30	5	55	5	2	17.0
RLZJ	24	22.80~24.11	23.61~24.92	24.42~25.60	5	60	5	2	19.0


Notes : 1. Zener voltage measured 40ms after application of voltage.
2. When ordering, specify the rank of the diodes. Otherwise, the diodes of rank A, B or C are supplied.

(Unit : mm)

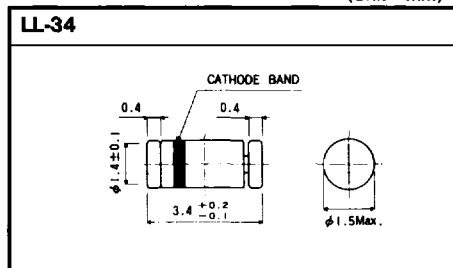

●Product Designation

- When ordering, specify the type.
- Check each code against the tables shown below.
- Fill a space with the next character.

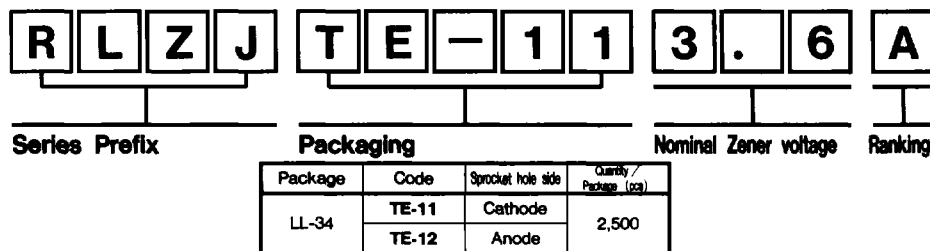

Zener Diodes

CODES

The Class and Marking symbols for Standard and Special Products Units

Page 179

Packaging

Page 181

Packaging specifications

Page 182

Part Marking

Page 185

Recommended Lead pattern

Page 163