


TA4101F

UHF VHF MIX APPLICATION

FEATURES



- Double Balance circuit

PIN ASSIGNMENT (TOP VIEW)



- | | |
|--------------------|--------------|
| 1. IF OUT | 5. Base |
| 2. V _{CC} | 6. Base |
| 3. OSC IN | 7. GND |
| 4. Base | 8. Collector |

MARKING

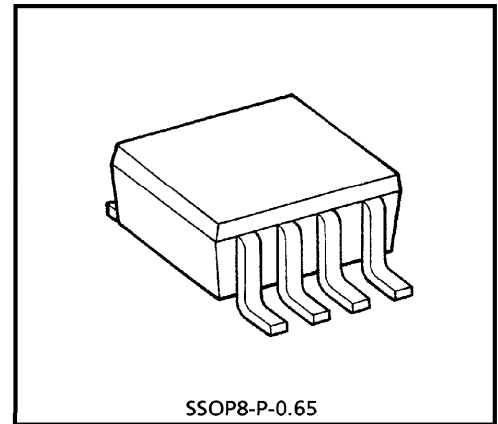

Weight : 0.02 g (Typ.)

MAXIMUM RATING (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	6	V
Total Power Dissipation	P _D (*)	300	mW
Operating Temperature	T _{opr}	-40~85	°C
Storage Temperature Range	T _{stg}	-55~125	°C

(*) : When mounted the glass epoxy board of 2.5 cm² × 1.6 t

ELECTRICAL CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Circuit Current	I _{CC}	—	V _{CC} = 5 V	3.9	5.7	7.5	mA
MIXER Gain	G _{MIX}	1	V _{CC} = 5 V, (*)	-6.0	-3.5	—	dB
MIXER NOISE Figure	NF _{MIX}	1	V _{CC} = 5 V, (*)	—	9.0	12.0	dB
Maximum Output Level	P _o	1	V _{CC} = 5 V, (*)	-12	-9	—	dBmW

(*) : f_{RF} = 800 MHz, f_{LO} = 860 MHz (0 dBm), I_F = 60 MHz

980910EBA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


MEASUREMENT CIRCUIT 1






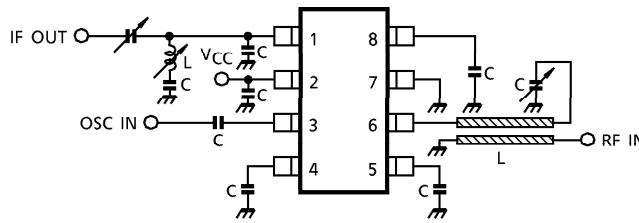


NOTICE

The circuits and measurements contained in this document are given only in the context of as examples of applications for these products. Moreover, these example application circuits are not intended for mass production, since the high-frequency characteristics (the AC characteristics) of these devices will be affected by the external components which the customer uses, by the design of the circuit and by various other conditions. It is the responsibility of the customer to design external circuits which correctly implement the intended application, and to check the characteristics of the design. TOSHIBA assume no responsibility for the integrity of customer circuit designs or applications.



EQUIVALENT CIRCUIT

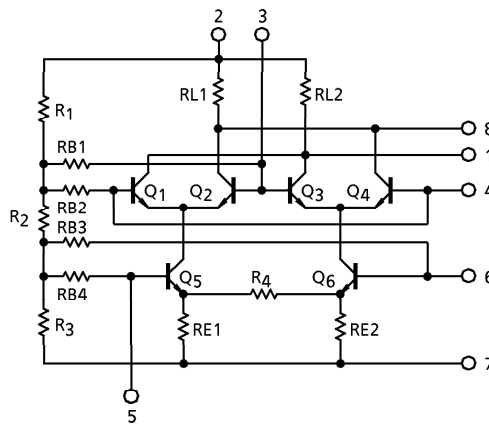

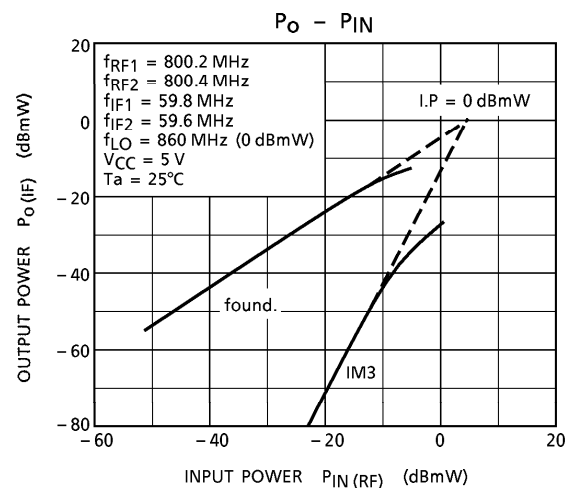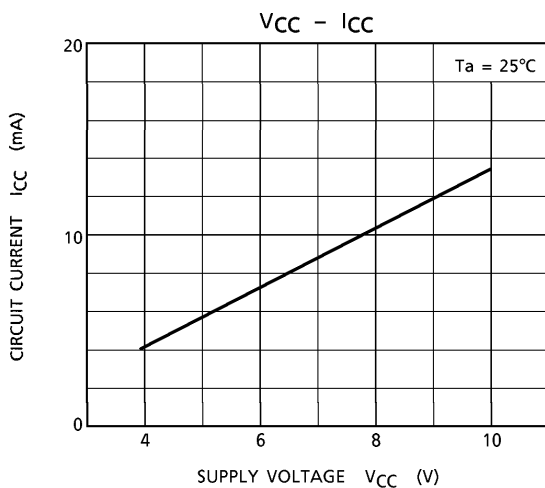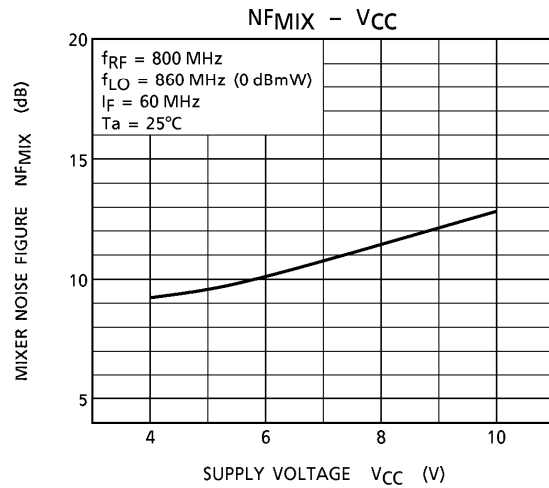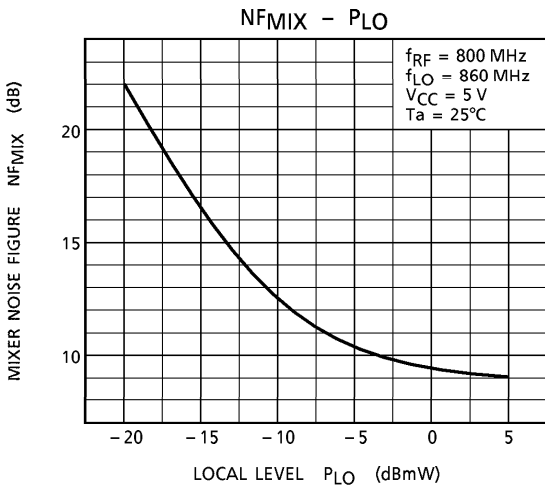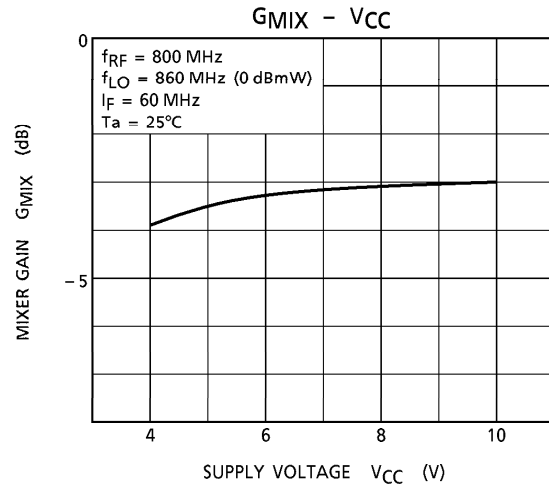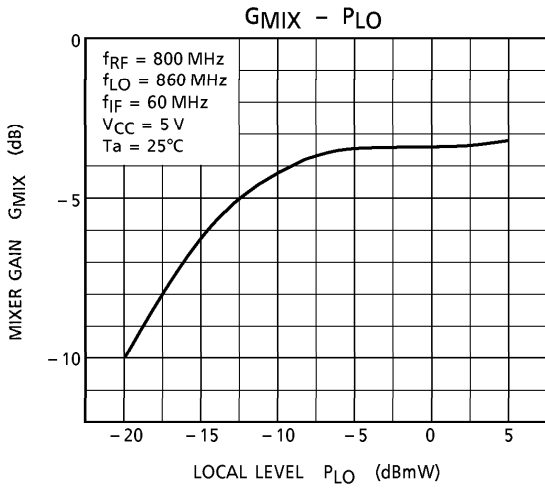

PACKAGE DIMENSIONS
SSOP8-P-0.65

Unit : mm

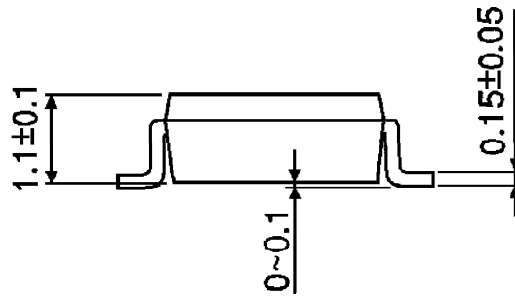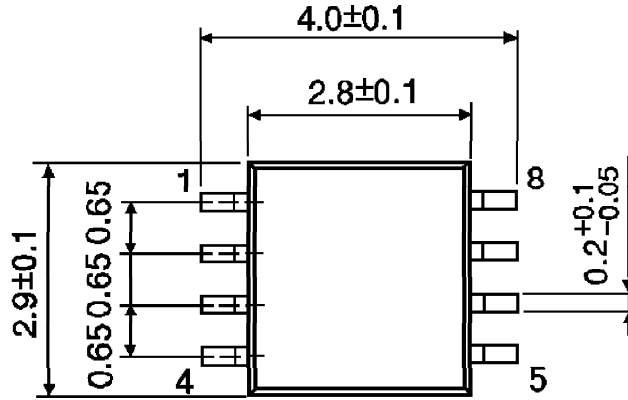

Weight : 0.02 g (Typ.)