

FAST RECOVERY EPITAXIAL DIODE

600V / 30AV_F=2.2V @ I_F=30A, t_{rr}=52ns

PRODUCT FEATURES

- Ultrafast Recovery Time
- Soft Recovery Characteristics
- Low Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current

APPLICATIONS


- Converter, PFC
- · Freewheeling, Snubber
- UPS, Plating Power Supply
- Inversion Welder

MECHANICAL DATA

Case: TO-220AC Molded Plastic

• Epoxy: UL94V-0 rate flame retadant

Polarity: As Marked

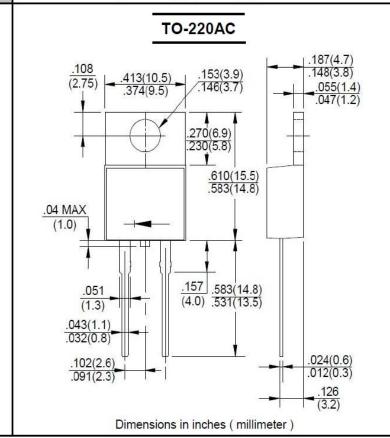

ABSOLUTE MAXIMUM RATINGS (TC=25°C unless otherwise specified)

PARAMETER Maximum Repetitive Reverse Voltage		SYMBOL	VALUES	LINIT	
		Marking	D30A06T	UNIT	
		VRM	600	V	
Average Forward Current	T _C =95°C	lF(AV)	30	А	
Non-Repetitive Surge Forward Current	t _P =10ms, 50Hz, Half Sine Wave	IFSM	150	А	
Power Dissipation		Po	62.5	W	
Operating Junction and Storage Temperatures		T _J , Tstg	-55 to + 150	$^{\circ}$ C	
Thermal Resistance	Junction-to-Case	Rejc	2.0	°C/w	
Module-to-Sink			1.1	Nt.m	
Weight			2.1	g	

ELECTRICAL AND DYNAMIC RECOVERY CHARACTERISTICS (T_J=25°C, unless otherwise specified)

			11/5/1	· ·		
PARAMETER	TEST CONDITIONS	SYMBOL	Min.	Тур.	Max.	UNIT
Reverse Leakage Current	VR=600V	I _{RM}	-	11.51	25	μA
	VR=600V, TJ=125°C		-	1151	250	μA
Forward\/oltage	IF=30A	VF	<u> </u>	1.6	2.2	V
	IF=30A, TJ=125°C		- T-		2	V
Reverse RecoveryTime	I=1A, ∀R=30V, diF/dt=-200A/μs	trr		35		ns
Reverse RecoveryTime	V _R =300V, I _F =30A di _F /dt=-200A/µs, TJ=25°C	trr	2	52	12	ns
Max. Reverse Recovery Current		IRRM	<u>.</u>	3.8	12	Α
Reverse RecoveryTime	V_R =300 V , I_F =30A di_F/dt =-200A/ μ s, T_J =125°C	trr	_	135	3 4	ns
Max. Reverse Recovery Current		IRRM	-	8.8	:: - :	Α

REV. 6, 30-Dec-2014



FIG. 1 - Typical Forward Voltage Drop Characteristics 60 I_F - Forward Current (A) 50 40 30 T_J=125℃ 20 T_J=25℃ 10 0 0 0.5 1 1.5 2 2.5 V_F - Forward Voltage Drop Voltage (V)

FIG. 2 - Typical Value of Reverse Current vs. Reverse Voltage 100 l_R - Reverse Current (uA)
10.0
10.0 T_J=125℃ T_J=100°C T₁=150°C T_J=25°℃ 0.001 0 100 200 300 400 500 600 V_R - Reverse Voltage (V)

FIG. 3 - Typical Junction Capacitance vs.


Reverse Voltage

1000

(Jd)

0 100 200 300 400 500 600

V_R - Reverse Voltage (V)

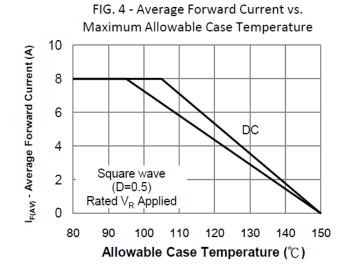

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

REV. 6, 30-Dec-2014