

SAW Components

Data Sheet B3823

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

SAW ComponentsB3823Low-Loss Filter397,5 MHzData Sheet


Ceramic package QCC8B

Features

- Low-loss filter (RX) for Trunked Radio
- Usable bandwidth 5 MHz
- No matching required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)
- Hermetically sealed ceramic package

Terminals


• Gold-plated



typ. Dimensions in mm, approx. weight 0,07 g

Pin configuration

1Input2Input ground5Output6Output ground3, 7Ground4, 8Case ground



Туре	Ordering code	Marking and Package	Packing
		according to	according to
B3823	B39401-B3823-Z810	C61157-A7-A46	F61074-V8037-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T _A	-30 / +70	°C	
Storage temperature range	T _{stg}	-40 / +85	°C	
DC voltage	V _{DC}	0	V	
Source power	Ps	10	dBm	source impedance 50 Ω

2

SAW Components		B3823
Low-Loss Filter		397,5 MHz
Data Sheet Characteristics		
Operating temperature range: Terminating source impedance: Terminating load impedance:	$T_{A} = +15 \dots +35 \ ^{\circ}C$ $Z_{S} = 50 \Omega$ $Z_{L} = 50 \Omega$	

		min.	typ.	max.	
Nominal frequency	f _N	—	397,5	—	MHz
Maximum insertion attenuation	α_{max}				
395,0 MHz 400,0 MHz		—	2,7	3,5	dB
Amplitude ripple (p-p)	Δα				
395,0 MHz 400,0 MHz		—	0,6	1,4	dB
Return loss (Input and Output)					
395,0 MHz 400,0 MHz		12,0	13,0	_	dB
VSWR					
395,0 MHz 400,0 MHz		—	1,6:1	2,0:1	
Absolute attenuation	$lpha_{abs}$				
0,1 MHz 355,0 MHz		40	60	_	dB
355,0 MHz 390,0 MHz		25	35		dB
435,0 MHz 885,0 MHz		40	50	—	dB
885,0 MHz 2000,0 MHz		20	35	—	dB
Temperature coefficient of frequency	TC _f		- 36		ppm/l

SAW Components	B3823
Low-Loss Filter	397,5 MHz
Data Sheet	
Characteristics	

Operating temperature range:

Operating temperature range:	<i>T</i> _A = -30 +70 °C
Terminating source impedance:	$Z_{\rm S} = 50 \ \Omega$
Terminating load impedance:	$Z_{\rm L}$ = 50 Ω

		min.	typ.	max.	
Nominal frequency	f _N	_	397,5	_	MHz
Maximum insertion attenuation	α_{max}				
395,0 MHz 400,0 MHz		—	3,0	3,5	dB
Amplitude ripple (p-p)	Δα				
395,0 MHz 400,0 MHz		—	0,8	2,0	dB
Return loss (Input and Output)					
395,0 MHz 400,0 MHz		12,0	13,0	—	dB
VSWR					
395,0 MHz 400,0 MHz		—	1,6:1	2,0:1	
Absolute attenuation	α_{abs}				
0,1 MHz 355,0 MHz		40	60	_	dB
355,0 MHz 390,0 MHz		25	35		dB
435,0 MHz 885,0 MHz		40	50		dB
885,0 MHz 2000,0 MHz		20	35	—	dB
Temperature coefficient of frequency	TC _f	_	- 36		ppm/K


谷TDK

SAW Components


Low-Loss Filter

B3823 397,5 MHz

Data Sheet Transfer function

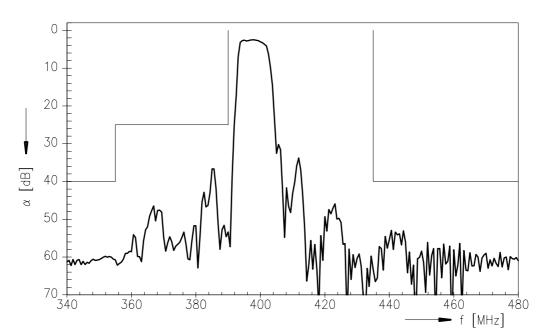

Normalized transfer function (pass band; +15 °C ... +35 °C)

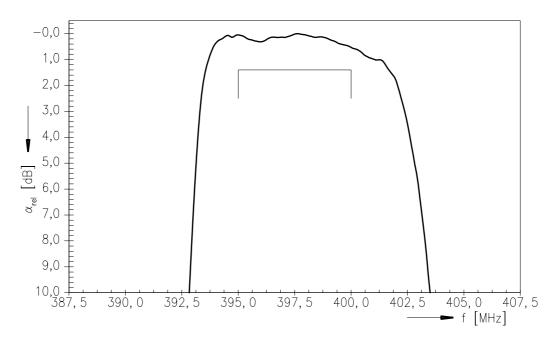

5

SAW Components	B3823
Low-Loss Filter	397,5 MHz
Data Sheet	

Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC IS PD P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

