

HIGH CURRENT SWITCHING APPLICATION.

### APPLICATION



Relay drivers, high-speed inverters, converters, and other general high-current switching applications.

### FEATURES

- Low Collector Emitter Saturation Voltage.  
:  $V_{CE(sat)} = -0.4V(\text{Max.}) (I_C = -4A)$
- High Current and High  $f_T$   
:  $I_C = -8A, f_T = 130\text{MHz.}$
- Excellent Linearity of  $h_{FE}$
- High Speed Switching Time.  
:  $f_T = 20\text{nS (Typ.)}$
- Complementary to KTC1804D/L

### MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	-60	V
Collector-Emitter Voltage		$V_{CEO}$	-60	V
Emitter-Base Voltage		$V_{EBO}$	-6	V
Collector Current	DC	$I_C$	-8	A
	Pulse	$I_{CP}$	-12	
Collector Power Dissipation	Ta=25 °C	$P_C$	1.0	W
	Tc=25 °C		20	
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C

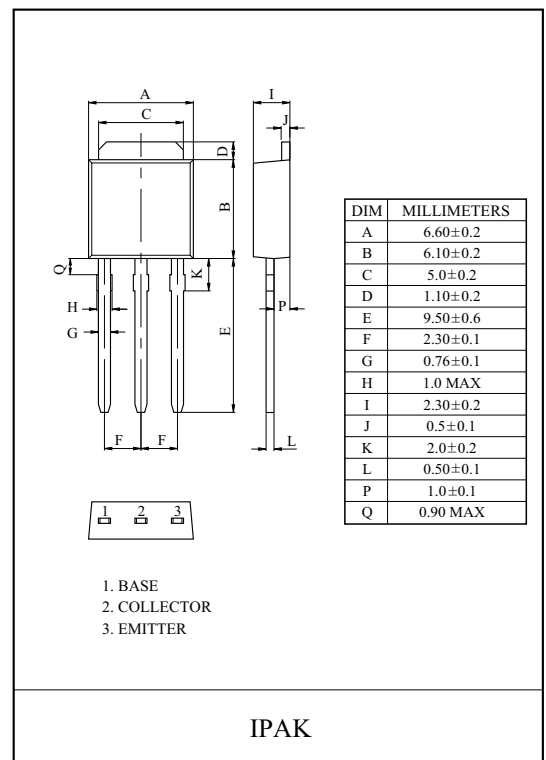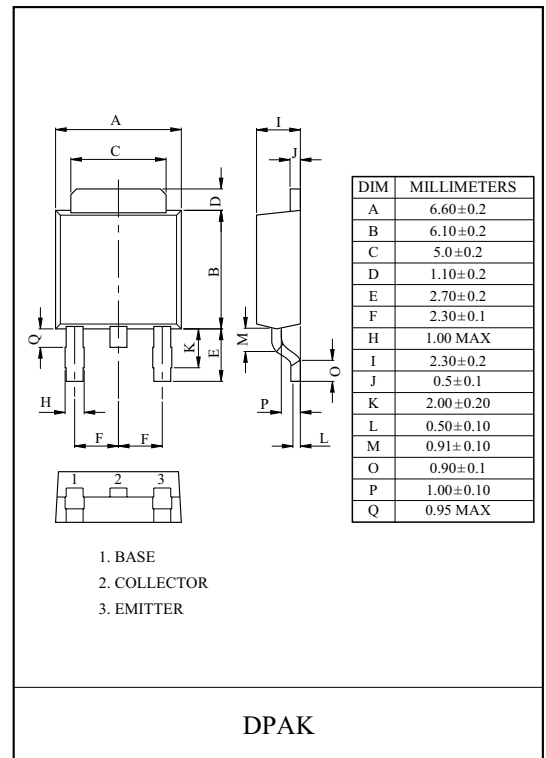







# KTA1204D/L

## ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB}=-40V, I_E=0$	-	-	-1	$\mu A$
Emitter Cut-off Current		$I_{EBO}$	$V_{EB}=-4V, I_C=0$	-	-	-1	$\mu A$
DC Current Gain	$h_{FE}(1)$ (Note)		$V_{CE}=-2V, I_C=-0.5A$	100	-	400	
	$h_{FE}(2)$		$V_{CE}=-2V, I_C=-6A$	35	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=-4A, I_B=-0.2A$	-	-250	-500	mV
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=-4A, I_B=-0.2A$	-	-0.95	-1.3	mV
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-60			V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=-1mA, R_{BE}=\infty$	-50			V
Emitter-base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-6	-	-	V
Gain-Bandwidth Product		$f_T$	$V_{CE}=-5V, I_C=-1A$	-	130	-	MHz
Collector Output Capacitance		$C_{ob}$	$V_{CB}=-10V, I_E=0, f=1MHz$	-	95	-	pF
Switching Time	Turn On Time	$t_{on}$	<p style="text-align: center;"> <math>-I_{B1} = I_{B2} = 0.4A</math>  DUTY CYCLE <math>\leq 1\%</math> </p>	-	50	-	nS
	Storage Time	$t_{stg}$		-	450	-	
	Fall Time	$t_f$		-	20	-	

Note :  $h_{FE}$  Classification O:100~200, Y:140~280, GR:200~400.

# KTA1204D/L

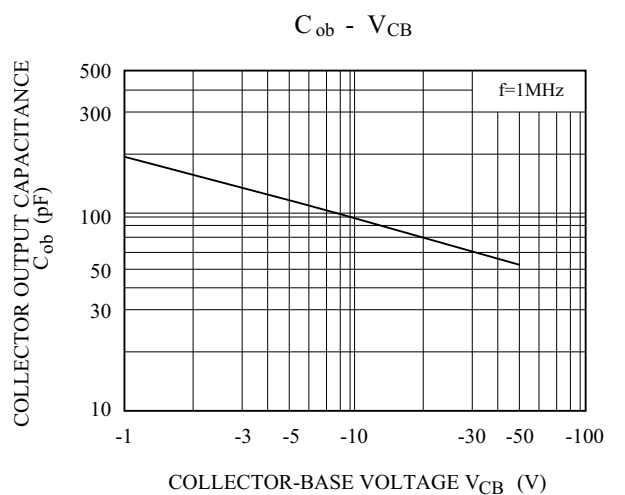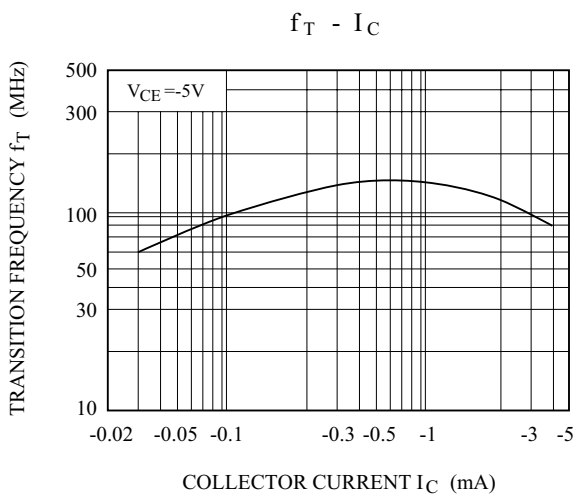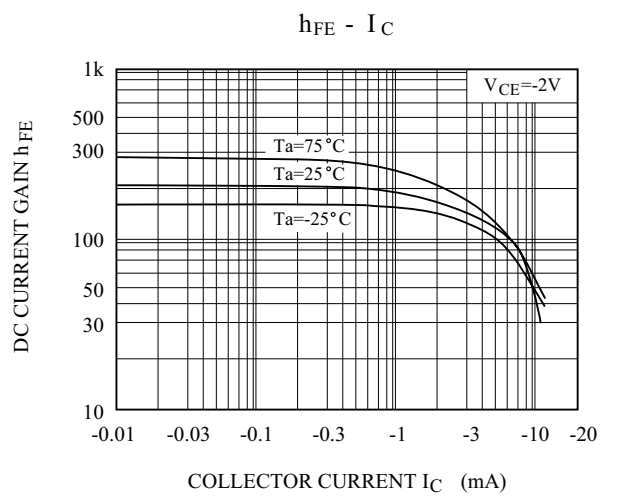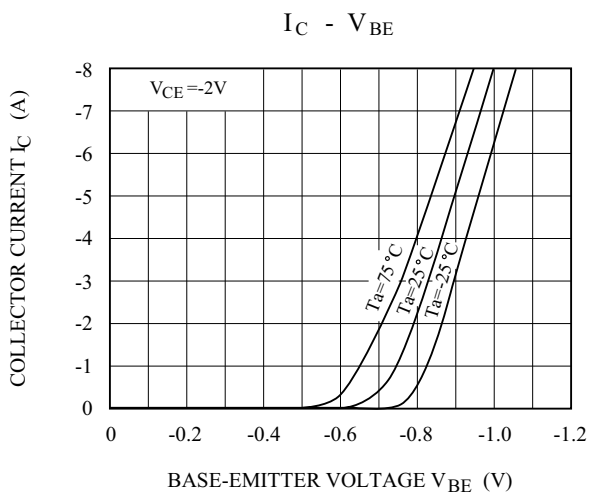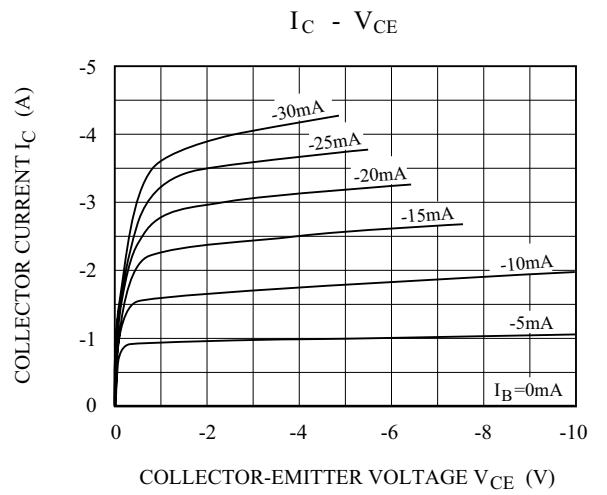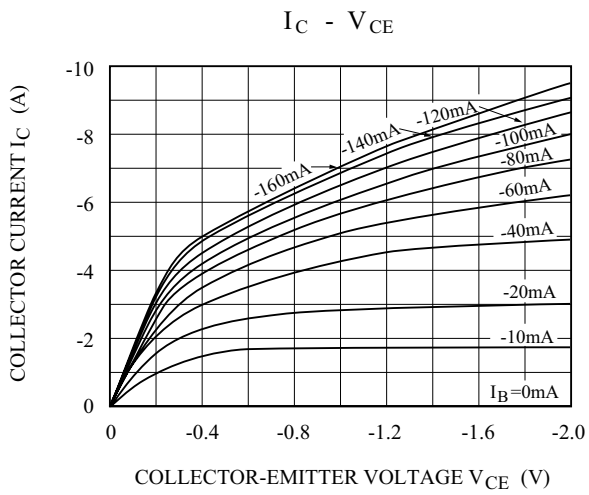

# KTA1204D/L

