
TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT process) (Bias Resistor built-in Transistor)

RN1973

Switching, Inverter Circuit, Interface Circuit and Driver Circuit Applications.

- Two devices are incorporated into an Ultra-Super-Mini (6-pin) package
- Incorporating a bias resistor into a transistor reduces the parts count.
 Reducing the parts count enables the manufacture of ever more compact equipment and lowers assembly cost.
- Diverse resistance values are available suited to a range of different circuit designs.

Equivalent Circuit and Bias Resistor Values




R1: 47 kΩ (Q1, Q2 common)

Maximum Ratings (Ta = 25°C) (Q1, Q2 common)


Characteristics	Symbol	Rating	Unit
Collector-base voltage	V_{CBO}	50	V
Collector-emitter voltage	V _{CEO}	50	V
Emitter-base voltage	V _{EBO}	5	V
Collector current	IC	100	mA
Collector power dissipation	P _C (Note)	200	mW
Junction temperature	Tj	150	°C
Storage temperature range	T _{stg}	-55~150	°C

Note: Total rating

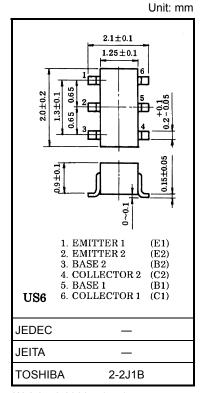

Weight: 0.0068 g (typ.)


Equivalent Circuit (top view)





Electrical Characteristics (Ta = 25°C) (Q1, Q2 common)


Characteristics	Symbol	Test Condition	Min	Тур.	Max	Unit
Collector cut-off current	I _{CBO}	$V_{CB} = 50 \text{ V}, I_E = 0$	_	_	100	nA
Emitter cut-off current	I _{EBO}	$V_{EB} = 5 \text{ V}, I_{C} = 0$	_	_	100	nA
DC current gain	h _{FE}	$V_{CE} = 5 \text{ V}, I_{C} = 1 \text{ mA}$	120	_	700	
Collector-emitter saturation voltage	V _{CE (sat)}	$I_C = 5 \text{ mA}, I_B = 0.25 \text{ mA}$	_	0.1	0.3	V
Input resistor	R1	_	32.9	47	61.1	kΩ


Marking











RESTRICTIONS ON PRODUCT USE

030619EAA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No
 responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
 may result from its use. No license is granted by implication or otherwise under any patent or patent rights of
 TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor
 devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical
 stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of
 safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of
 such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as
 - In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.