

# 2SK1303


## Silicon N-Channel MOS FET

### Application

High speed power switching

### Features

- Low on-resistance
- High speed switching
- Low drive current
- 4 V gate drive device
  - Can be driven from 5 V source
- Suitable for motor drive, DC-DC converter, power switch and solenoid drive

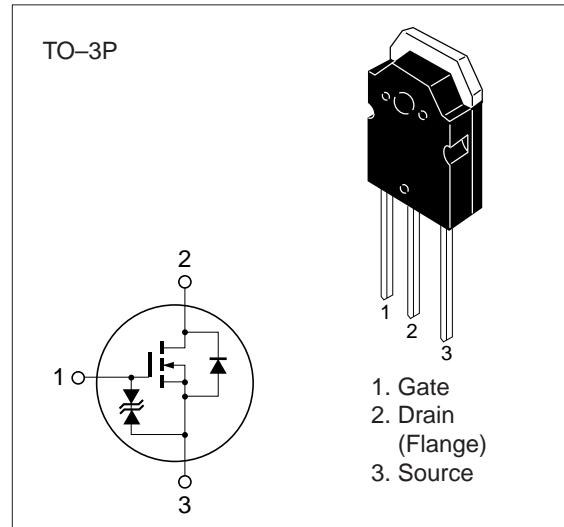

**Table 1 Absolute Maximum Ratings** ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Ratings	Unit
Drain to source voltage	$V_{DSS}$	100	V
Gate to source voltage	$V_{GSS}$	$\pm 20$	V
Drain current	$I_D$	30	A
Drain peak current	$I_{D(pulse)}^*$	120	A
Body to drain diode reverse drain current	$I_{DR}$	30	A
Channel dissipation	$P_{ch}^{**}$	100	W
Channel temperature	$T_{ch}$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

\*  $PW \leq 10 \mu\text{s}$ , duty cycle  $\leq 1\%$

\*\* Value at  $T_C = 25^\circ\text{C}$

**Table 2 Electrical Characteristics** ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Drain to source breakdown voltage	$V_{(BR)DSS}$	100	—	—	V	$I_D = 10\text{ mA}, V_{GS} = 0$
Gate to source breakdown voltage	$V_{(BR)GSS}$	$\pm 20$	—	—	V	$I_G = \pm 100\ \mu\text{A}, V_{DS} = 0$
Gate to source leak current	$I_{GSS}$	—	—	$\pm 10$	$\mu\text{A}$	$V_{GS} = \pm 16\ \text{V}, V_{DS} = 0$
Zero gate voltage drain current	$I_{DSS}$	—	—	250	$\mu\text{A}$	$V_{DS} = 80\ \text{V}, V_{GS} = 0$
Gate to source cutoff voltage	$V_{GS(off)}$	1.0	—	2.0	V	$I_D = 1\ \text{mA}, V_{DS} = 10\ \text{V}$
Static drain to source on state resistance	$R_{DS(on)}$	—	0.05	0.06	$\Omega$	$I_D = 15\ \text{A}, V_{GS} = 10\ \text{V}^*$
		—	0.06	0.09		$I_D = 15\ \text{A}, V_{GS} = 4\ \text{V}^*$
Forward transfer admittance	$ y_{fs} $	13	22	—	S	$I_D = 15\ \text{A}, V_{DS} = 10\ \text{V}^*$
Input capacitance	$C_{iss}$	—	1750	—	pF	$V_{DS} = 10\ \text{V}, V_{GS} = 0,$
Output capacitance	$C_{oss}$	—	710	—	pF	$f = 1\ \text{MHz}$
Reverse transfer capacitance	$C_{rss}$	—	180	—	pF	
Turn-on delay time	$t_{d(on)}$	—	15	—	ns	$I_D = 15\ \text{A}, V_{GS} = 10\ \text{V},$
Rise time	$t_r$	—	120	—	ns	$R_L = 2\ \Omega$
Turn-off delay time	$t_{d(off)}$	—	390	—	ns	
Fall time	$t_f$	—	195	—	ns	
Body to drain diode forward voltage	$V_{DF}$	—	1.3	—	V	$I_F = 30\ \text{A}, V_{GS} = 0$
Body to drain diode reverse recovery time	$t_{rr}$	—	360	—	ns	$I_F = 30\ \text{A}, V_{GS} = 0,$ $di_F/dt = 50\ \text{A}/\mu\text{s}$

\* Pulse Test

