


# XFMRS



## DIGITAL AUDIO TRANSFORMERS

XFMRS Group is proud to introduce it's broad line of Digital Audio Transformers. XFMRS offers transformers to work with AKM, Cirrus (Crystal), Motorola, TI, and Yamaha chip sets. These transformers are designed for fast rise time (25nS Max), low jitter, high common mode noise rejection, and the lowest interwinding capacitance. Various packages are available for frequencies from 48-192KHz.

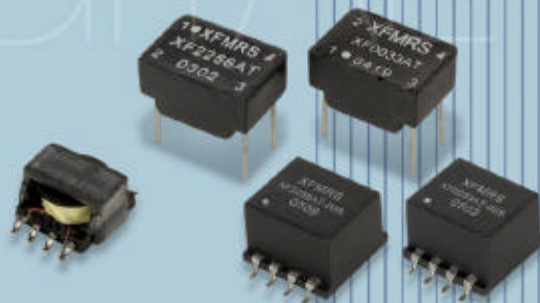

Part Number	Primary Inductance (uH)	Max Pri LL (uH)	Max DCR (Ohms)	Turns Ratio (Pri:Sec)	Isolation Voltage (Vac)	Freq. (KHz)
XF0033AT	2500±20%	0.50	tbd	1:1±3%	1500	48
XF0033AT-00S	2500±20%	0.50	tbd	1:1±3%	1500	48
XF2256AT	225 Min	0.30	0.400	1:1±3%	1500	96
XF2256AT-00S	225 Min	0.50	0.100	1:1±5%	1500	96
XF5756-ER9	500 Min	0.50	0.210	1:1±1%	1000	192
XF6656-ER9	665 Min	tbd	0.275	2:1±1%	1000	192

**XF0033AT**

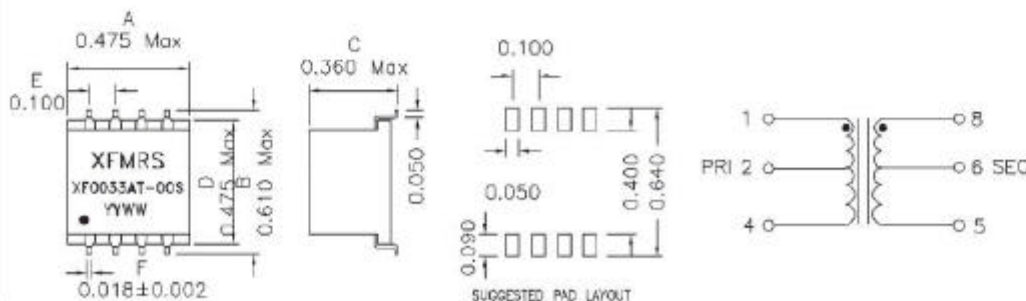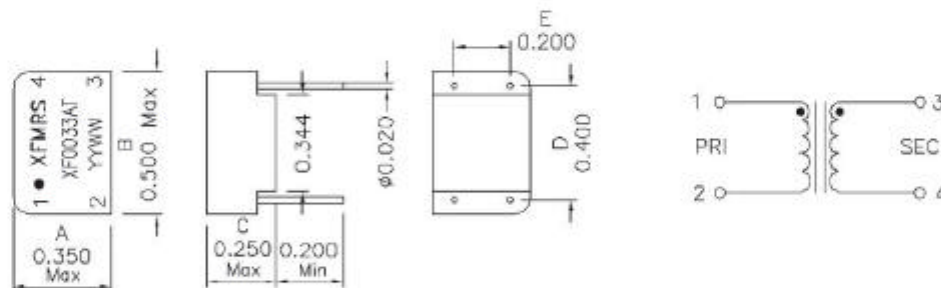

**XF0033AT-00S**

**XFMRS**

www.XFMRS.com

XFMRS INC.  
XFMRS, LTD.

XFMRS - EUROPE



7570 E. Landersdale Road • Camby, Indiana 46113 • TEL: (317) 834-1066 • FAX: (317) 834-1067  
Block G, H, I & J, 3/F., Phase 1, Golden Dragon Ind. Centre 152-160 Tai Lin Pal Road Kwai Chung, N.T., Hong Kong  
TEL: (852) 2423-1688 • FAX: (852) 2420-3236  
4 Gravel Pit Lane, Yarnton, Oxford, U.K. OX5 1PX • TEL / FAX: 44 (0) 1865-374690

E-mail: xfmrsinc@aol.com

# XFMRS



# DIGITAL AUDIO TRANSFORMERS

**XF2256AT**

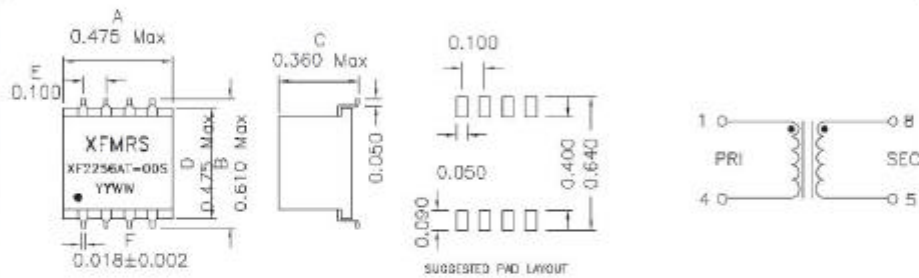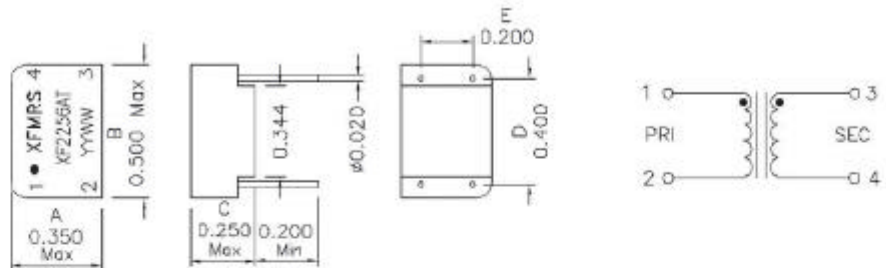

**XF2256AT-00S**

**XF5756-ER9**

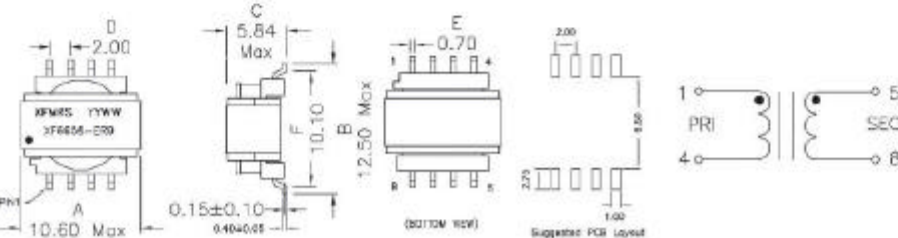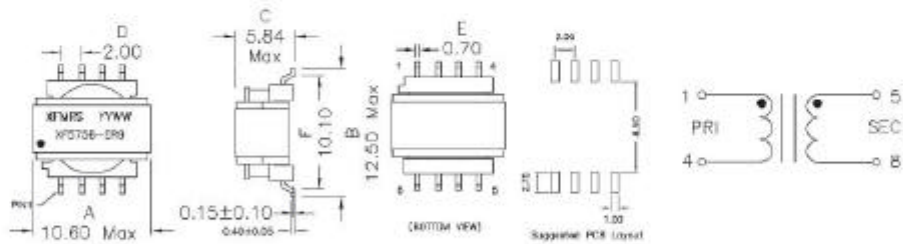

**XF6656-ER9**

**XFMRS**

www.XFMRS.com

XFMRS INC.  
XFMRS, LTD.

XFMRS - EUROPE

7570 E. Landersdale Road • Camby, Indiana 46113 • TEL: (317) 834-1066 • FAX: (317) 834-1067  
Block G.H.I & J, 3/F., Phase 1, Golden Dragon Ind. Centre 152-160 Tai Lin Pai Road Kwai Chung, N.T., Hong Kong  
TEL: (852) 2429-1869 • FAX: (852) 2420-3236

4 Gravel Pit Lane, Yarnton Oxford, U.K. OX5 1PX • TEL / FAX: 44 (0) 1865-374690

E-mail: xfmrsinc@aol.com