

# Ceramic Resonators (CERALOCK®)



## MHz Chip Type -Standard Frequency Tolerance for General Usage-

Chip type "CERALOCK" with built-in load capacitors provides extremely small package. MURATA's package technology expertise has enabled the development of the Chip "CERALOCK" with built-in load capacitors. High-density mounting can be realized because of the small package and the elimination of the need for an external load capacitor.

### ■ Features


1. Oscillation circuits do not require external load capacitors.
2. The series is available in a wide frequency range.
3. The resonators are extremely small and have a low profile.
4. No adjustment is necessary for oscillation circuits.

### ■ Applications


1. Clock oscillators for microprocessors
2. Small electronic equipment such as hand held phone, digital video camcorder (DVC), digital still camera (DSC), portable audio player, etc.
3. Storage media and memory (HDD, Optical storage device, FDD, Flash memory card, etc.)
4. Office automation equipment (Mobile PC, Mouse, Keyboard, etc.)
5. Audio-visual applications (TV, DVD-HDD recorder, Audio equipment, Remote controller, etc.)
6. Home appliances (Air conditioner, Microwave oven, Refrigerator, Washing machine, etc.)




CSTCC\_G  
2.00-3.99MHz

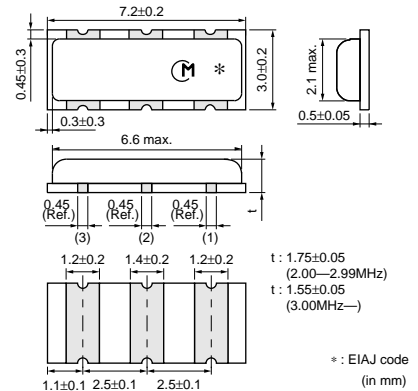


CSTCR\_G  
4.00-7.99MHz

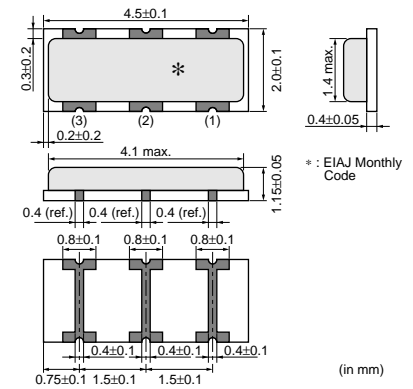


CSTCE\_G  
8.00-13.99MHz

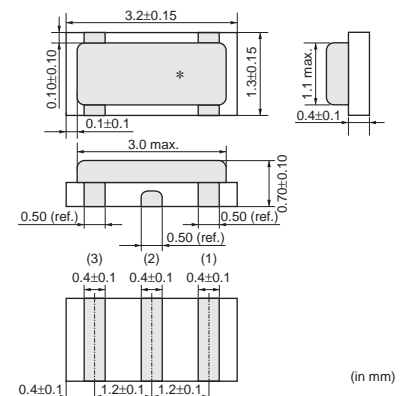

CSTCE\_V  
14.00-20.00MHz



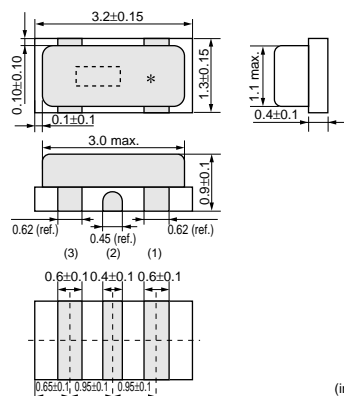


CSTCG\_V  
20.00-33.86MHz  
(Ultra Small)

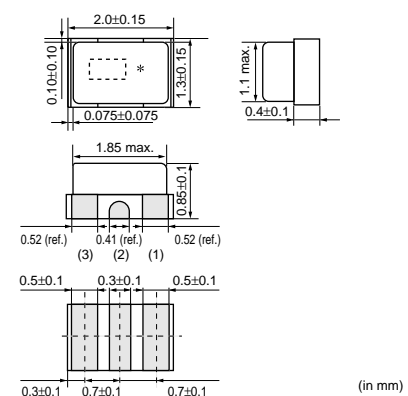

Continued on the following page. ↗

Continued from the preceding page.

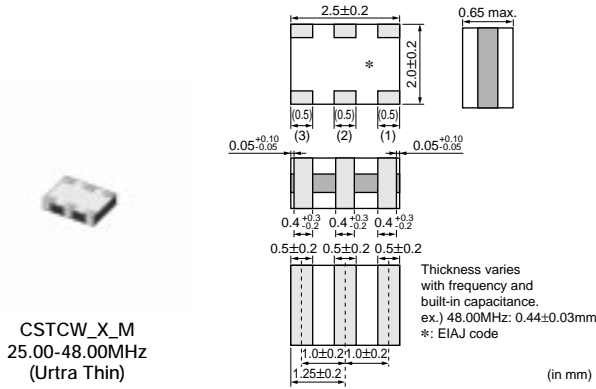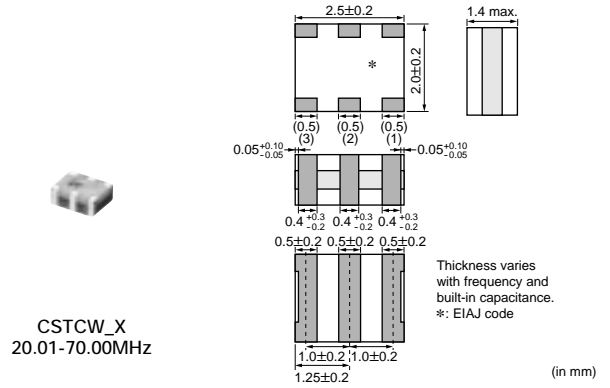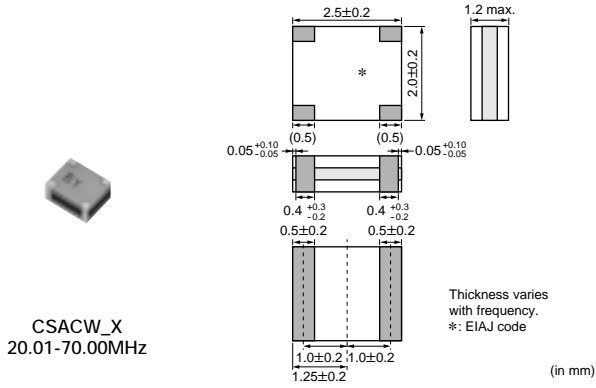


4

Part Number	Oscillating Frequency (MHz)	Initial Tolerance	Temp. Stability (%)	Temperature Range (°C)
<b>CSTCC_G</b>	2.00 to 3.99	±0.5%	±0.3 [±0.4%:Built-in Capacitance 47pF type within Freq.2.00 to 3.49MHz]	-20 to 80
<b>CSTCR_G</b>	4.00 to 7.99	±0.5%	±0.2	-20 to 80
<b>CSTCE_G</b>	8.00 to 13.99	±0.5%	±0.2	-20 to 80
<b>CSTCE_G_Z</b>	8.00 to 13.99	±0.5%	±0.2	-40 to 125
<b>CSTCE_V</b>	14.00 to 20.00	±0.5%	±0.3	-20 to 80
<b>CSTCG_V</b>	20.00 to 33.86	±0.5%	±0.3	-20 to 80
<b>CSACW_X</b>	20.01 to 70.00	±0.5%	±0.2	-20 to 80
<b>CSTCW_X</b>	20.01 to 70.00	±0.5%	±0.2	-20 to 80
<b>CSTCW_X_M</b>	25.00 to 48.00	±0.5%	±0.2	-20 to 80


Irregular or stop oscillation may occur under unmatched circuit conditions. Please check the actual conditions prior to use.

## ■ Oscillation Frequency Measuring Circuit


CSTCR\_G/CSTCE\_G/CSTCE\_V/CSTCG\_V

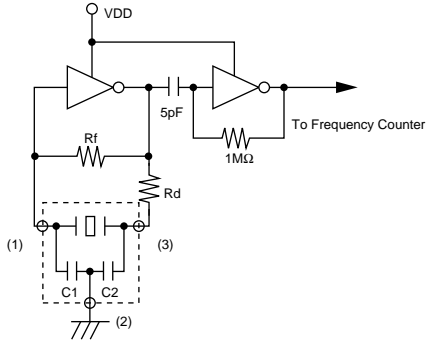


CSTCC\_G/CSTCW\_X

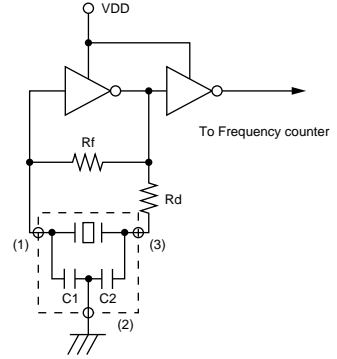

CSACW\_X

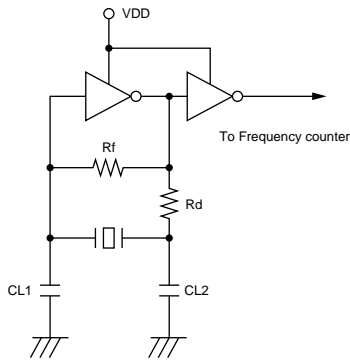


CSTCW\_X\_M

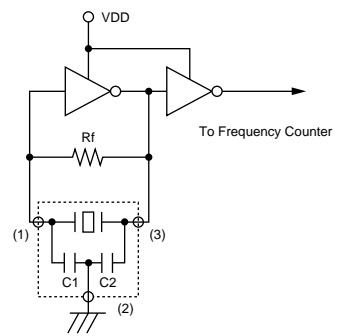


■ Standard Land Pattern Dimensions

CSTCC\_G

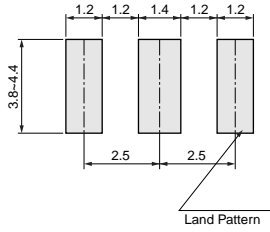


(in mm)

CSTCR\_G

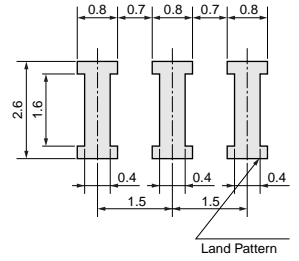


(in mm)

CSTCE\_G

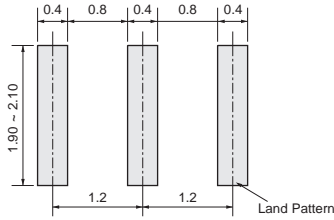


(in mm)

CSTCE\_V

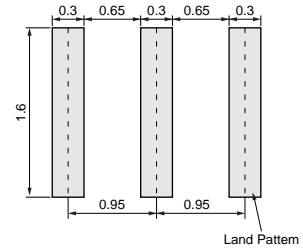


(in mm)

CSTCG\_V

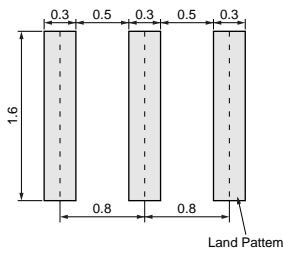


(in mm)

CSACW\_X

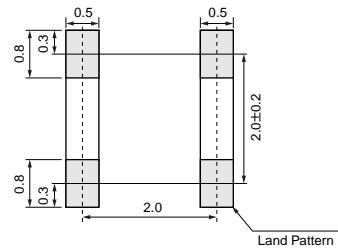


(in mm)

CSTCW\_X

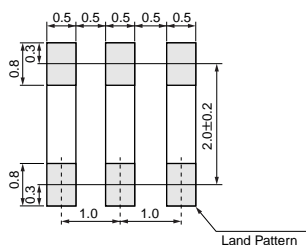

(in mm)

CSTCW\_X\_M

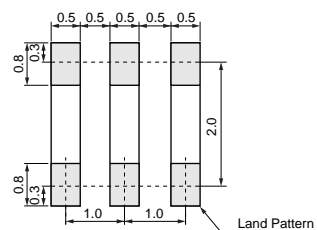


(in mm)


4

## ■ Oscillation Frequency Temperature Stability


CSTCC\_G

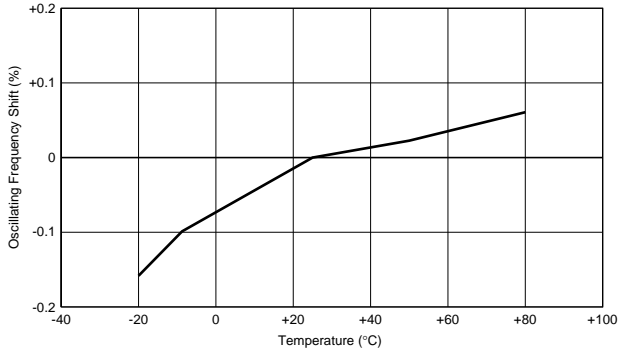


CSTCR\_G

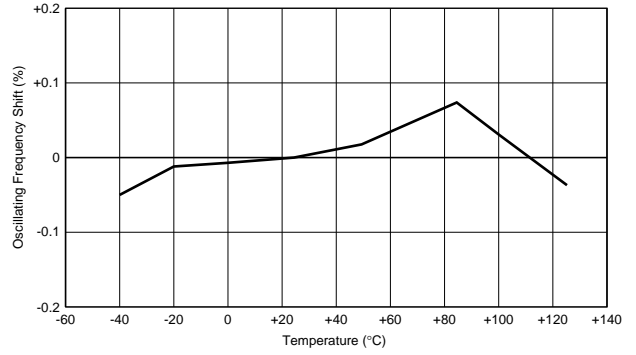


CSTCE\_G

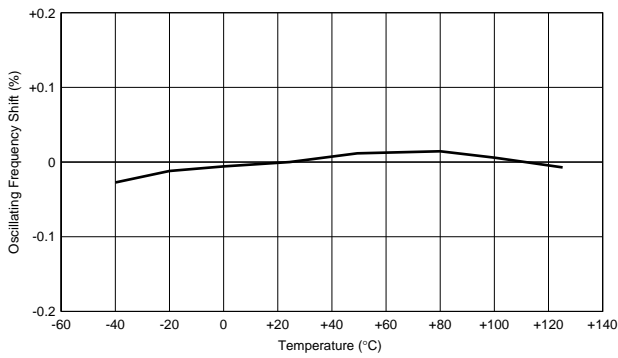


CSTCE\_V

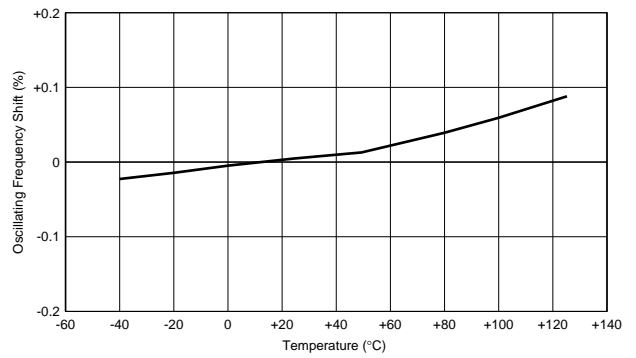


CSTCG\_V

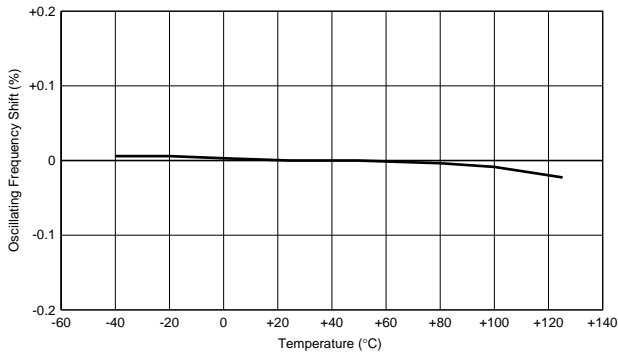


CSACW\_X

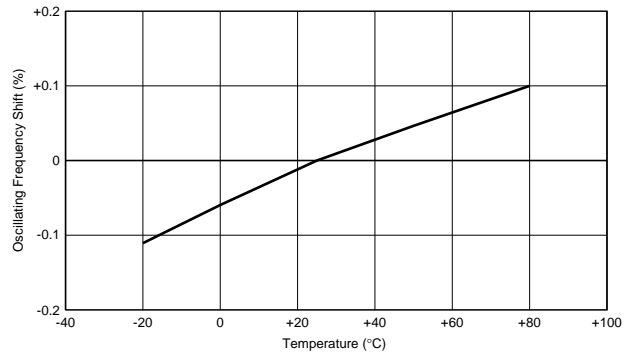

CSTCW\_X

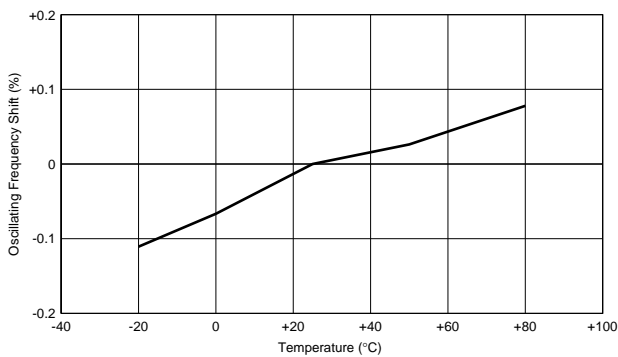


CSTCW\_X\_M

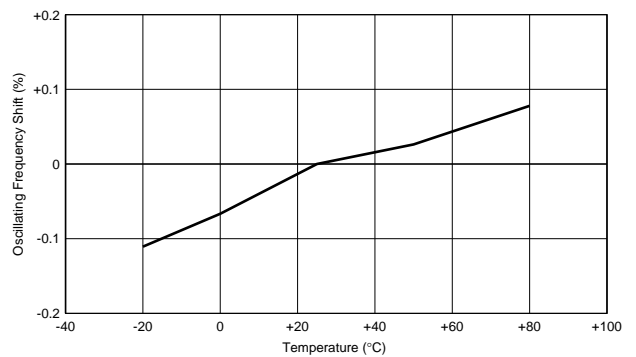

# Application Circuits Utilization

## ■ uPD78F0533GB (NEC Electronics)

8-bit Microcomputer

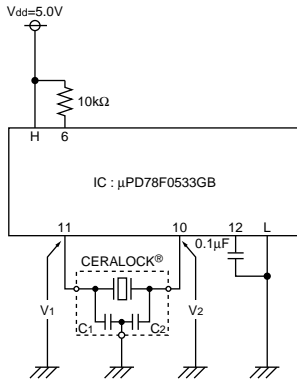


H: 15, 16, 47  
L: 9, 13, 14, 48

CERALOCK®: CSTCR4M00G55-R0  
C1=39pF (Typ.)  
C2=39pF (Typ.)

## ■ M38235G6HP (Renesas)

8-bit Microcomputer

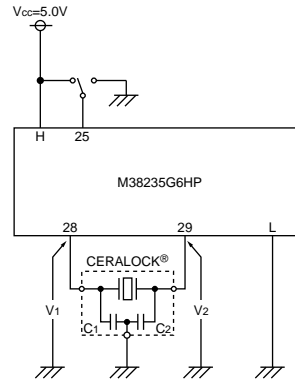


H: 71  
L: 30, 73

CERALOCK®: CSTLS8M00G53-B0  
C1=15pF (Typ.)  
C2=15pF (Typ.)

## ■ TMP19A43FDXBG (Toshiba)

32-bit Microcomputer

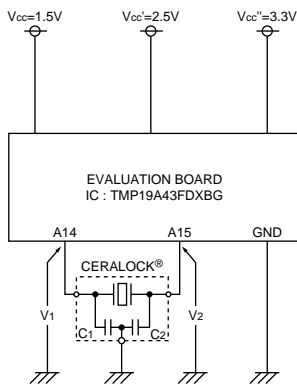


Xin: A14  
Xout: A15

CERALOCK®: CSTCE10M0G52-R0  
C1=10pF (Typ.)  
C2=10pF (Typ.)

## ■ MN103SFC2D (Panasonic)

32-bit Microcomputer

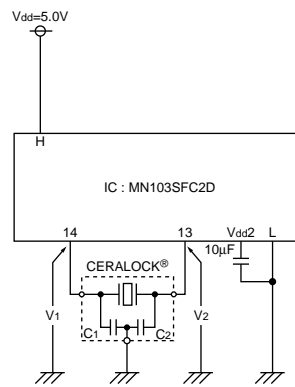


H: 9, 17, 34  
L: 7, 15, 36  
Vdd2: 16, 38

CERALOCK®: CSTCR5M00G55Z-R0  
C1=39pF (Typ.)  
C2=39pF (Typ.)

## ■ MB95F128H (Fujitsu)

8-bit Microcomputer

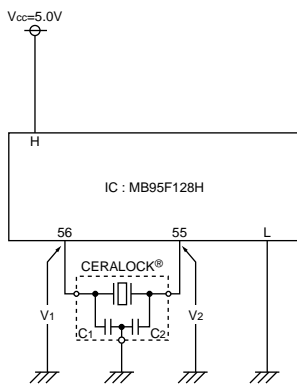


H: 3, 28, 51, 79  
L: 4, 29, 54, 57

CERALOCK®: CSTCE8M00G52-R0  
C1=10pF (Typ.)  
C2=10pF (Typ.)

## ■ PIC16F716-I/SO (Microchip)

8-bit Microcomputer

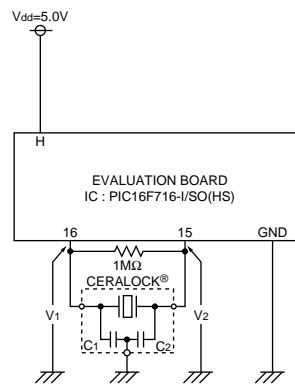

CERALOCK®: CSTCE12M0G52A-R0  
C1=10pF (Typ.)  
C2=10pF (Typ.)

Continued on the following page.


4

## Application Circuits Utilization

Continued from the preceding page.

### ■ HD64F36077GH (Renesas)

16-bit Microcomputer

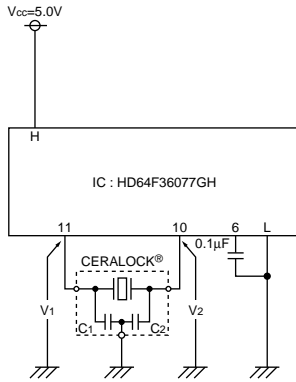


H: 3, 7, 12  
L: 8, 9

CERALOCK®: CSTCE8M00G52-R0  
C1=10pF (Typ.)  
C2=10pF (Typ.)

### ■ LC87F5G32A (Sanyo)

8-bit Microcomputer

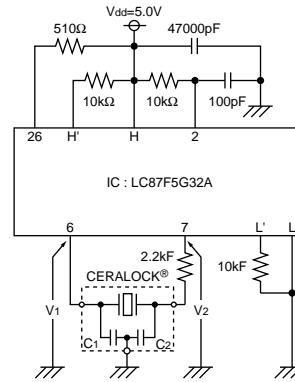


H: 8, 19, 39  
L: 5, 20, 40  
H': 29, 31, 35  
L': 30, 32-34, 36

CERALOCK®: CSTLS5M00G53-B0  
C1=15pF (Typ.)  
C2=15pF (Typ.)

### ■ uPD70F3215HYGC (NEC Electronics)

32-bit Microcomputer

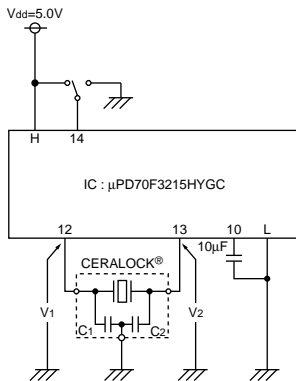


H: 1, 5, 9, 34, 70  
L: 2, 8, 11, 33, 69

CERALOCK®: CSTCR5M00G55-R0  
C1=39pF (Typ.)  
C2=39pF (Typ.)

### ■ ATmega128 (Atmel)

8-bit Microcomputer

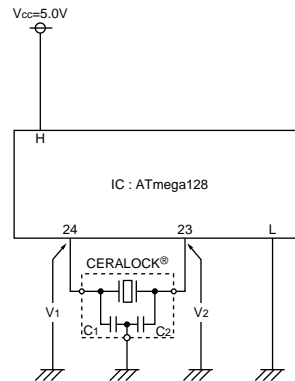


H: 21, 52, 64  
L: 22, 53, 63

CERALOCK®: CSTCE8M00G52-R0  
C1=10pF (Typ.)  
C2=10pF (Typ.)

### ■ ST7FLITE29F2B6 (ST Microelectronics)

8-bit Microcomputer

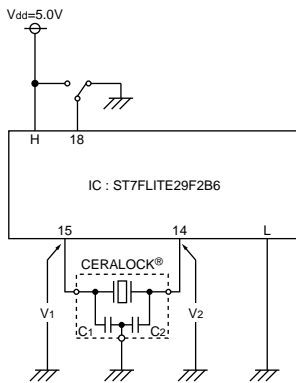


H: 17  
L: 16

CERALOCK®: CSTCE16M0V53-R0  
C1=15pF (Typ.)  
C2=15pF (Typ.)

### ■ TMS320F2810PBKA (Texas Instrumets)

32-bit Microcomputer

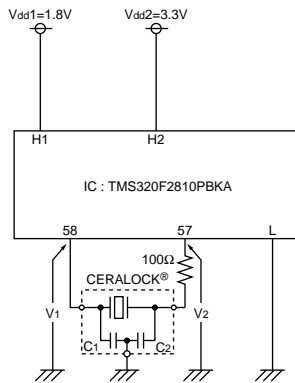

H1: 20, 29, 42, 56, 63, 74, 82, 94, 99,  
100, 102, 110, 114  
H2: 1, 13, 14, 25, 49, 52, 83, 104, 118  
L: 12, 15, 17, 26, 30, 39, 53, 59, 62, 73,  
88, 95, 103, 109, 115, 117, 128

CERALOCK®: CSTCE15M0V53-R0  
C1=15pF (Typ.)  
C2=15pF (Typ.)