

## Features


- Blue colored diffusion lens type
- Ellipse type(X=4.6mm, Y=5.8mm)
- Super luminosity
- Flangeless package
- High power LEDs
- Oval shape
- Lens color : Blue
- View angle : 70° / 34°
- **E ; ESD Protected ( $\pm 2.0\text{KV}$ , 3 Times @100pF, 1.5K $\Omega$ )**

## Application

- Full color displays
- Message boards
- Variable message signs(VMS)

## Outline Dimensions

unit : mm

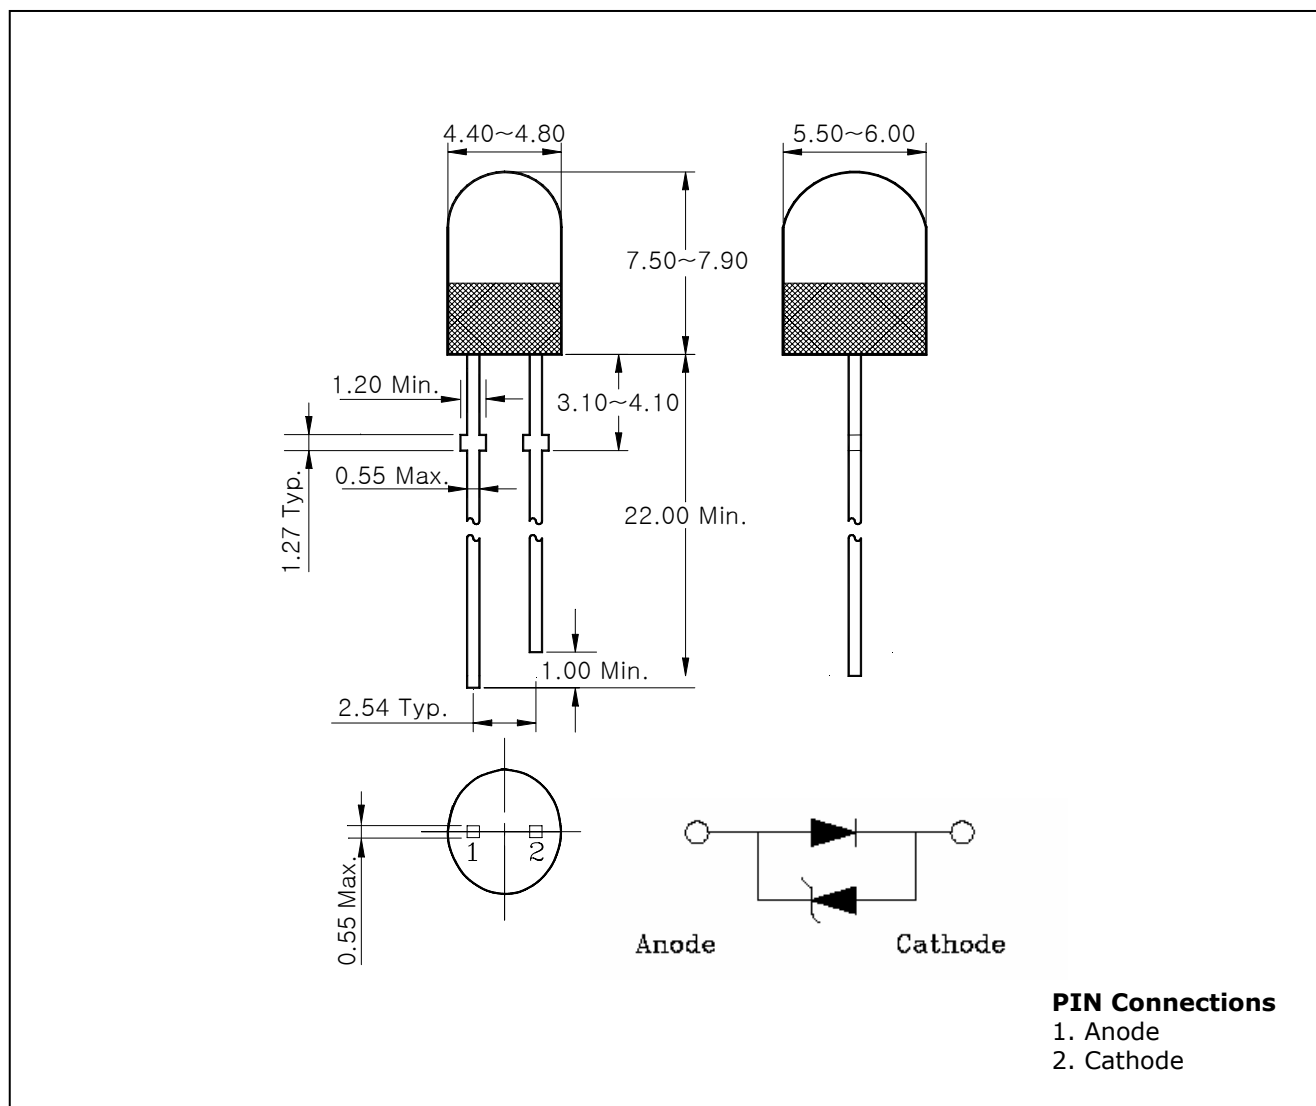


## Absolute Maximum Ratings

(Ta=25°C)

Characteristic	Symbol	Rating	Unit
Power dissipation	$P_D$	150	mW
Forward current	$I_F$	40	mA
*1 Peak forward current	$I_{FP}$	50	mA
Operating temperature range	$T_{opr}$	-30 ~ 85	°C
Storage temperature range	$T_{stg}$	-30 ~ 100	°C
*2 Soldering temperature	$T_{sol}$	260°C for 10 seconds	

\*1. Duty ratio = 1/16, Pulse width = 0.1ms

\*2. Keep the distance more than 2.0mm from PCB to the bottom of LED package



※ Recommend document  
 -. LED is very sensitive to ESD.

## Electrical / Optical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward voltage	$V_F$	$I_F = 20\text{mA}$	-	3.2	3.8	V
*4 Luminous intensity	$I_V$	$I_F = 20\text{mA}$	155	-	900	mcd
Dominant wavelength	$\lambda_D$	$I_F = 20\text{mA}$	457	465	473	nm
Spectrum bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	17	-	nm
*3 Half angle	$\theta_{1/2}$	$I_F = 20\text{mA}$	-	$\pm 17$	-	deg
	X Y		-	$\pm 35$	-	

\*3.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the peak intensity

\*4. Luminous intensity maximum tolerance for each grade classification limit is  $\pm 18\%$

\*4. Luminous Intensity Classification

M	N	O	P	Q <sub>1</sub>
155~230	230~350	350~520	520~700	700~900

(Do not use to combine grade classification. It must be used separately grade classification)

Characteristic Diagrams

Fig. 1  $I_F - V_F$

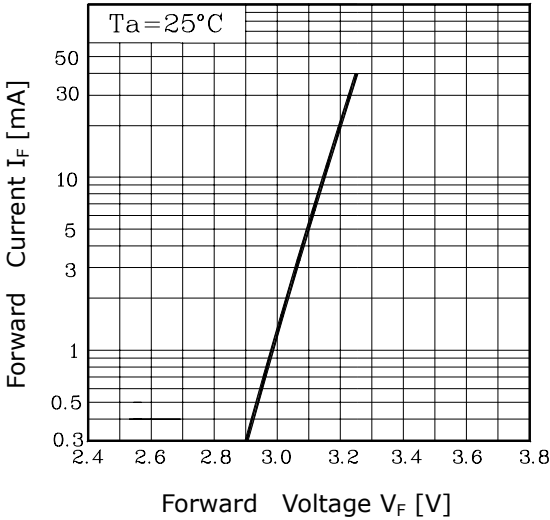


Fig. 2  $I_V - I_F$

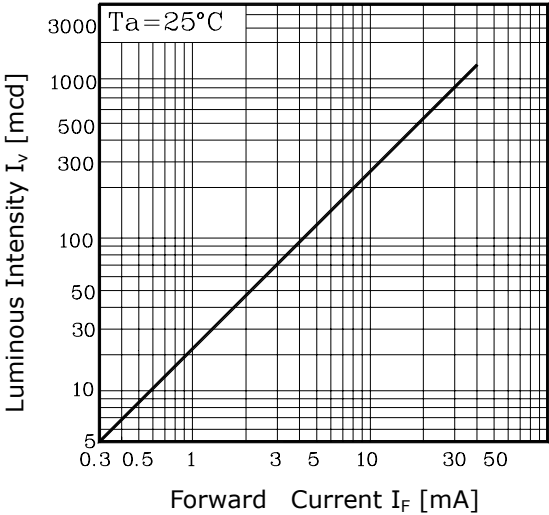


Fig. 3  $I_F - T_a$

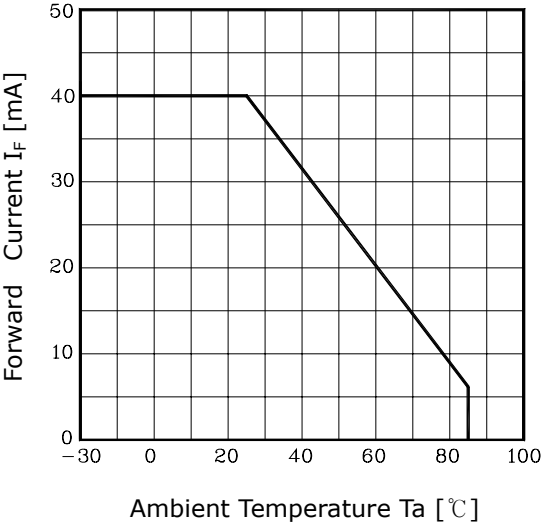


Fig.4 Spectrum Distribution

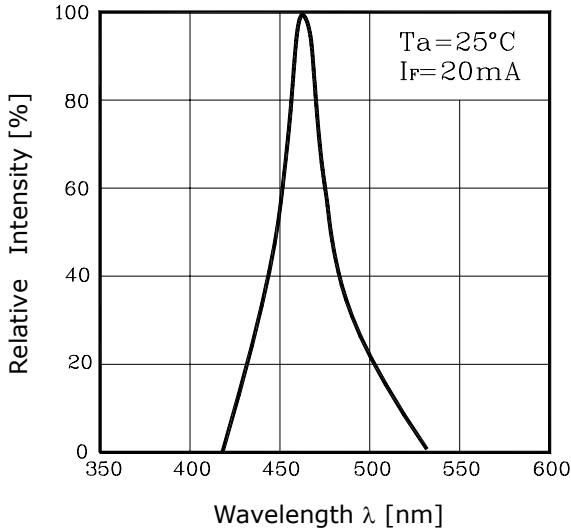


Fig. 5-1 Radiation Diagram(X)


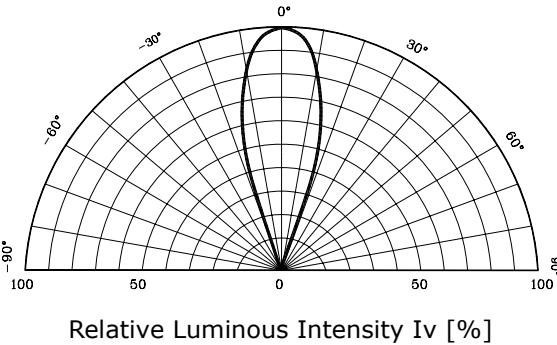


Fig. 5-2 Radiation Diagram(Y)

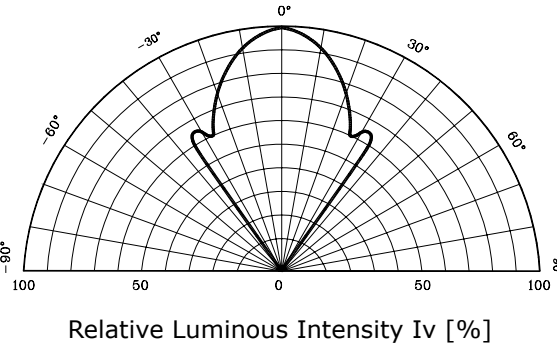

**The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..**

**Specifications mentioned in this publication are subject to change without notice.**