





Features

- Milky Diffusion lens type
- φ5mm(T-13/4) all plastic mold type
- Radiation color (Yellow, Y-Green)
- Low power consumption

Outline Dimensions unit: mm 5.20~5.60 5.60~6.00 №4.60~5.00 0.60~1.00 Min 26.00 0.40~0.60 26.00 2.54 Typ. [⊥] 2.54 Typ. 2 3 1 **PIN Connections** 1. Anode (Y-Green) 2. Common Cathode 3. Anode (Yellow)

Absolute Maximum Ratings

 $(Ta=25^{\circ}C)$

Characteristic	Symbol	Rat	Unit		
Characteristic		Yellow	Y-Green	Omt	
Power dissipation	P_{D}	75	75	mW	
Forward current	I_{F}	30	30	mA	
* ¹ Peak forward current	I_{FP}	50	50	mA	
Reverse voltage	V_R	4	4	V	
Operating temperature range	T_{opr}	-25	Ĉ		
Storage temperature range	T_{stg}	-30 ^	°C		
*2Soldering temperature	T _{sol}	260℃ for 10 seconds			

^{*1.}Duty ratio = 1/16, Pulse width = 0.1ms

^{*2.}Keep the distance more than 2.0mm from PCB to the bottom of LED package



Electrical / Optical Characteristics

 $(Ta=25^{\circ}C)$

2

Characteristic	Symbol		Test Condition	Min.	Typ.	Max.	Unit
Forward voltage	V _F	Yellow	I _F = 20mA	-	2.1	2.5	V
		Y-Green		-	2.2	2.5	
Luminous intensity	I_{V}	Yellow	I _F = 20mA	2	6	-	mcd
		Y-Green		6	14	-	
Peak wavelength	λ_{P}	Yellow	I _F = 20mA	-	585	-	nm
		Y-Green			570		
Spectrum bandwidth	Δ_{λ}	Yellow	I _F = 20mA	-	35	-	- nm
		Y-Green			30		
Reverse current		I_{R}	$V_R=4V$	-	1	10	uA
* ³ Half angle	θ1/2		$I_F = 20 \text{mA}$	-	±20	_	deg

^{*3.} θ 1/2 is the off-axis angle where the luminous intensity is 1/2 the peak intensity

KSD-O2U008-000

Characteristic Diagrams

Fig. 1 I_F - V_F




Fig. $3 I_F - Ta$




Fig. 2 I_V - I_F




Fig.4 Spectrum Distribution





Fig. 5 Radiation Diagram

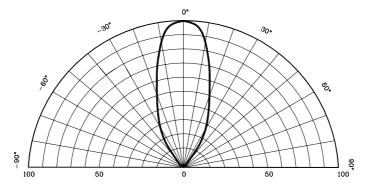

Relative Luminous Intensity Iv [%]

KSD-O2U008-000

3

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.

KSD-O2U008-000