


EPZ4000SE

- Common Mode Attenuation : 200 MHz to 2.5 GHz
- Robust Construction allows for IR/VP processes
- Operating Temperature : -40°C to +85°C


Electrical Parameters @ 25° C

OCL (μ H Typ.)	DCR (Ω Max.)
@ 100 KHz, 0.1 Vrms	
5	0.15

Schematic



Attenuation Vs Frequency

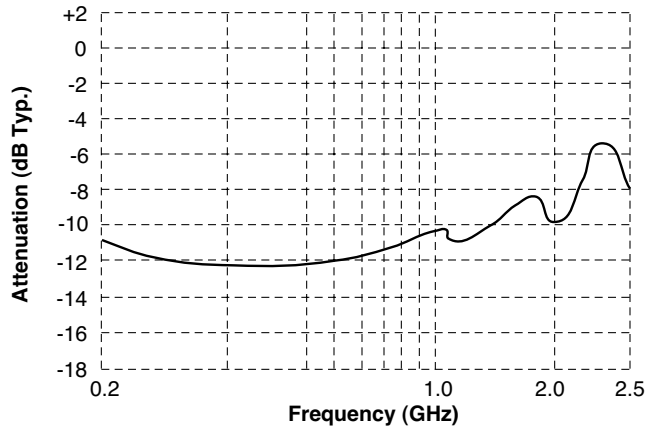

Package

