

TAPE Attachment Method

Part Number: 374724B00035 (Vis Number: 037807)


This part is in stock and available for immediate delivery:

Contact your local sales rep


BGA Surface Tape Type		Heat Sink Finish	Part Class	
Plastic	T411	Black Anodize	А	

Features and Benefits

- Configurations are available for a wide range of BGA package sizes
- Tape mounted versions eliminate the need for mounting holes in the PC Board
- These Heat Sinks can be used with either plastic or metal/ceramic BGA Packages depending on tape used
- These Heat Sinks are compatible with Ther-a-grip tapes



Width	Length	Height	Fin Thickness Across Width	Fin Thickness Across Length	Base Thickness	<pre># of fins across width</pre>	<pre># of fins across length</pre>
35mm	35mm	18mm	1.4mm	1.57mm	1.5mm	10	10

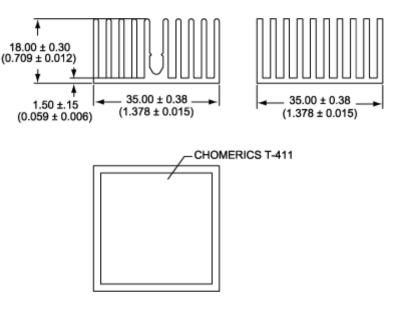


Mechanical Outline Drawing

Unless otherwise shown, tolerances are $\pm 0.38(\pm .015)$

Thermal Performance



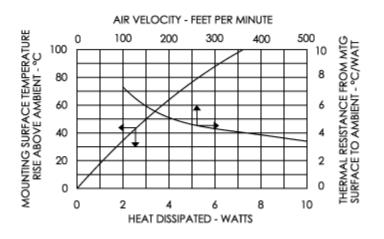

*Natural convection thermal resistance is based on a 75 °C heat sink temperature rise.

******Forced convection thermal resistance based on an entering 1.0 m/s (200 lfm) airflow. Due to various heat dissipation paths within a BGA device, please test the heat sink in your application.

This data sheet represents only one of a broad range of products we make to cool electronics. Our representatives can help you configure a complete cooling solution for your individual applications.

Visit us at www.aavidthermalloy.com • info@aavid.com • ©2002 Aavid Thermalloy, LLC