

# 14FF- 1Z- A1-1/2

# RELAY SOCKET



## CHARACTERISTICS

Ambient temperature :	-40 °C to 70°C
Rated voltage:	300VAC
Rated current :	10A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PBT V0 (UL)
Contacts spring material :	QSn6.5-0.1
Steel retainer :	available
White plastic tag :	non-available



### Applicable relay type:

- 1: suit for HF115F(JQX-115F) series (1 pole) (Relay height 15.7mm).
- 2: suit for HF14FF(JQX-14FF) (Relay height 25.5mm).

## DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM


Unit: mm

### Outline Dimensions

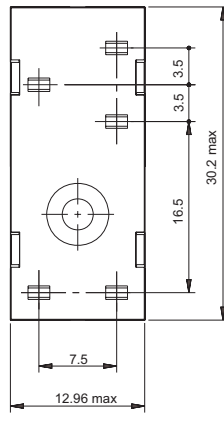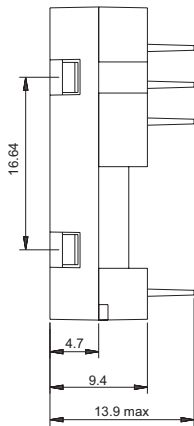


(Top View)

### Wiring Diagram

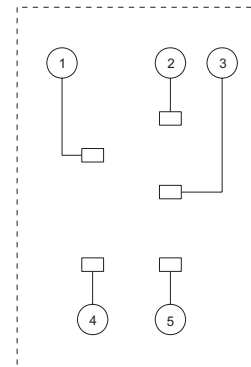

(Top View)

### Retainer Dimensions



Two types of retainer height (H) :  
H1=17.2mm (for -1 type)  
H2=27.2mm (for -2 type)  
You can choose the type you need.



HONGFA RELAY  
ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00