

## 5x25mm/ No. 240



### Indicator, 250V

#### Time-Current Characteristic

Quick Acting (F)

#### Standard

None

#### Approvals

None

### Specifications

#### Packaging

002: Pack (100 pcs.)

#### Materials

Tube: Ceramic  
End Caps: Nickel-plated brass

#### Operating Temperature

-25°C to +70°C (consider de-rating)

#### Climatic Category

-25°C/+70°C/21 days (EN 60068-1..3)

#### Stock Conditions

+10°C to +60°C  
relative humidity ≤ 75% yearly average,  
without dew


#### Vibration Resistance

24 cycles at 15 min. each (EN 60068-2-6)  
10 - 60Hz at 0.75mm amplitude  
60 - 2000Hz at 10g acceleration

#### Marking

Ⓜ, F, Current Rating, 250V

### Dimensions (mm)

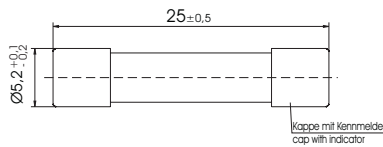

#### Limits for Pre-arcing Time

Rated Current	1.5 x I <sub>Rated</sub>	2.1 x I <sub>Rated</sub>	4 x I <sub>Rated</sub>	10 x I <sub>Rated</sub>
1.60A ... 6.3A	> 1h	< 30 min	< 300ms	< 20ms

#### Permissible continuous operating current is 100 % at ambient temperature of 23°C (73.4°F).

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I <sub>Rated</sub> max. (mV)	Power Dissipation 1.5 x I <sub>Rated</sub> max. (W)	Melting Integral 10 x I <sub>Rated</sub> max. (A <sup>2</sup> s)	color of indicator
1.6A	1160	250V <sup>1</sup>		640		1.3	orange
2.0A	1200	250V <sup>1</sup>	1500A @ 250 V AC	420		2.5	blue
2.5A	1250	250V <sup>1</sup>	50Hz	320	on request	5.8	yellow
4.0A	1400	250V <sup>1</sup>	cos φ = 0.7	200		21.0	brown
6.3A	1630	250V <sup>1</sup>		170		78.0	green


<sup>1</sup> Operating Voltage ≥ 10 V

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

### Order Information

Qty.	Order-Number	Series	Amp Code	Packaging
		240		

# 5x25mm/ No. 240

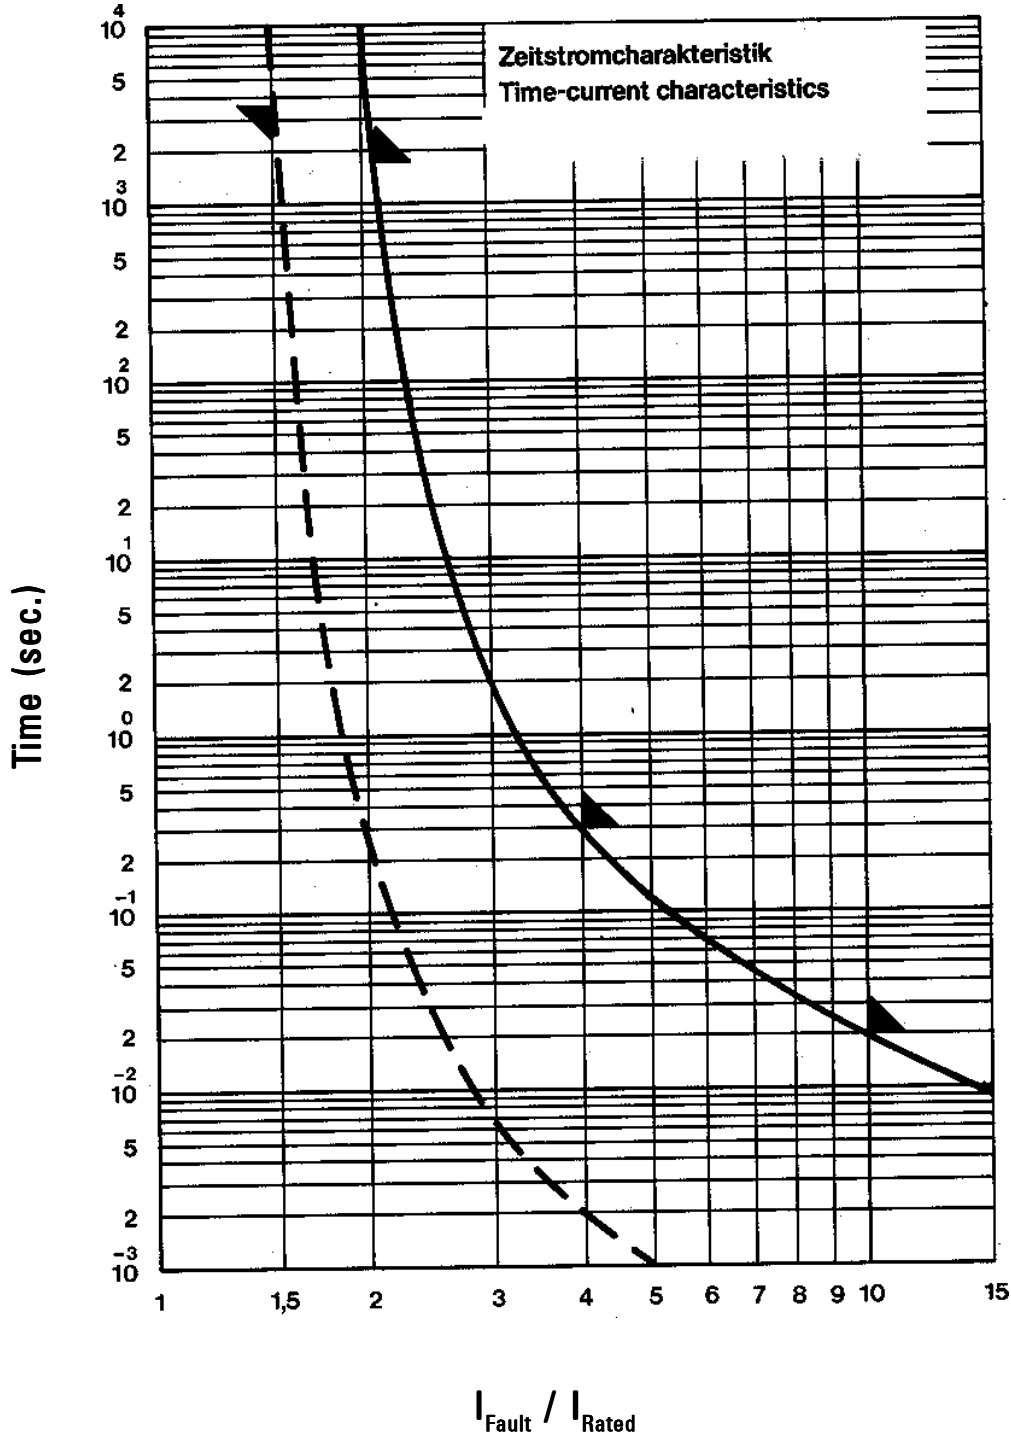

Contact Littelfuse for individual I-t curves