

# PMN38EN

N-channel TrenchMOS logic level FET

Rev. 01 — 13 January 2006

Product data sheet

## 1. Product profile

### 1.1 General description

Logic level N-channel enhancement mode Field-Effect Transistor (FET) in a plastic package using TrenchMOS technology.

### 1.2 Features

- Logic level threshold
- Low threshold voltage
- Very fast switching
- Surface-mounted package

### 1.3 Applications

- Battery powered motor control
- High-speed switch in set top box power supplies
- Load switch in notebook computers
- Driver FET in DC-to-DC converters

### 1.4 Quick reference data

- $V_{DS} \leq 30\text{ V}$
- $I_D \leq 5.4\text{ A}$
- $R_{DSon} \leq 38\text{ m}\Omega$
- $P_{tot} \leq 1.75\text{ W}$

## 2. Pinning information

Table 1: Pinning

| Pin        | Description | Simplified outline | Symbol       |
|------------|-------------|--------------------|--------------|
| 1, 2, 5, 6 | drain (D)   | <br>SOT457 (TSOP6) | <br>mbb076 S |
| 3          | gate (G)    |                    |              |
| 4          | source (S)  |                    |              |

PHILIPS

### 3. Ordering information

**Table 2: Ordering information**


| Type number | Package |  |         |
|-------------|---------|--|---------|
|             | Name    | Description                                      | Version |
| PMN38EN     | TSOP6   | plastic surface mounted package (TSOP6); 6 leads | SOT457  |

### 4. Limiting values

**Table 3: Limiting values**


In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol                    | Parameter               | Conditions  | Min | Max      | Unit |
|---------------------------|-------------------------|---|-----|----------|------|
| $V_{DS}$                  | drain-source voltage    | $25\text{ °C} \leq T_j \leq 150\text{ °C}$  | -   | 30       | V    |
| $V_{GS}$                  | gate-source voltage     |   | -   | $\pm 20$ | V    |
| $I_D$                     | drain current           | $T_{sp} = 25\text{ °C}$ ; $V_{GS} = 10\text{ V}$ ; see <a href="#">Figure 2</a> and <a href="#">3</a> | -   | 5.4      | A    |
|                           |                         | $T_{sp} = 100\text{ °C}$ ; $V_{GS} = 10\text{ V}$ ; see <a href="#">Figure 2</a>                      | -   | 3.4      | A    |
| $I_{DM}$                  | peak drain current      | $T_{sp} = 25\text{ °C}$ ; pulsed; $t_p \leq 10\text{ }\mu\text{s}$ ; see <a href="#">Figure 3</a>     | -   | 21.6     | A    |
| $P_{tot}$                 | total power dissipation | $T_{sp} = 25\text{ °C}$ ; see <a href="#">Figure 1</a>  | -   | 1.75     | W    |
| $T_{stg}$                 | storage temperature     |   | -55 | +150     | °C   |
| $T_j$                     | junction temperature    |   | -55 | +150     | °C   |
| <b>Source-drain diode</b> |                         |   |     |          |      |
| $I_S$                     | source current          | $T_{sp} = 25\text{ °C}$   | -   | 1.45     | A    |
| $I_{SM}$                  | peak source current     | $T_{sp} = 25\text{ °C}$ ; pulsed; $t_p \leq 10\text{ }\mu\text{s}$                                    | -   | 5.80     | A    |

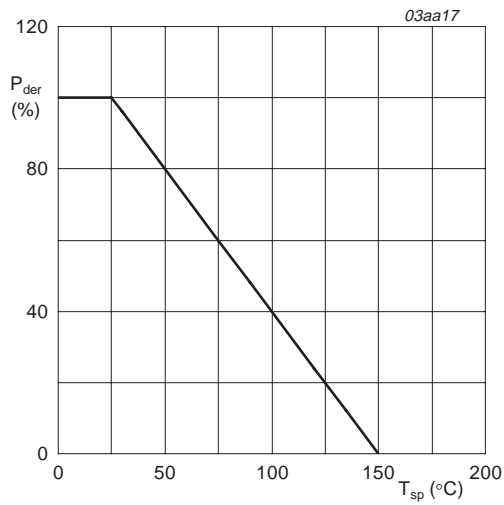


$$P_{der} = \frac{P_{tot}}{P_{tot(25^\circ C)}} \times 100\%$$

Fig 1. Normalized total power dissipation as a function of solder point temperature

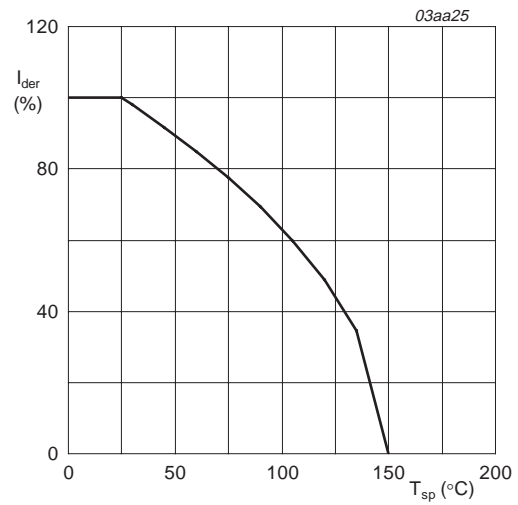

$$I_{der} = \frac{I_D}{I_{D(25^\circ C)}} \times 100\%$$

Fig 2. Normalized continuous drain current as a function of solder point temperature

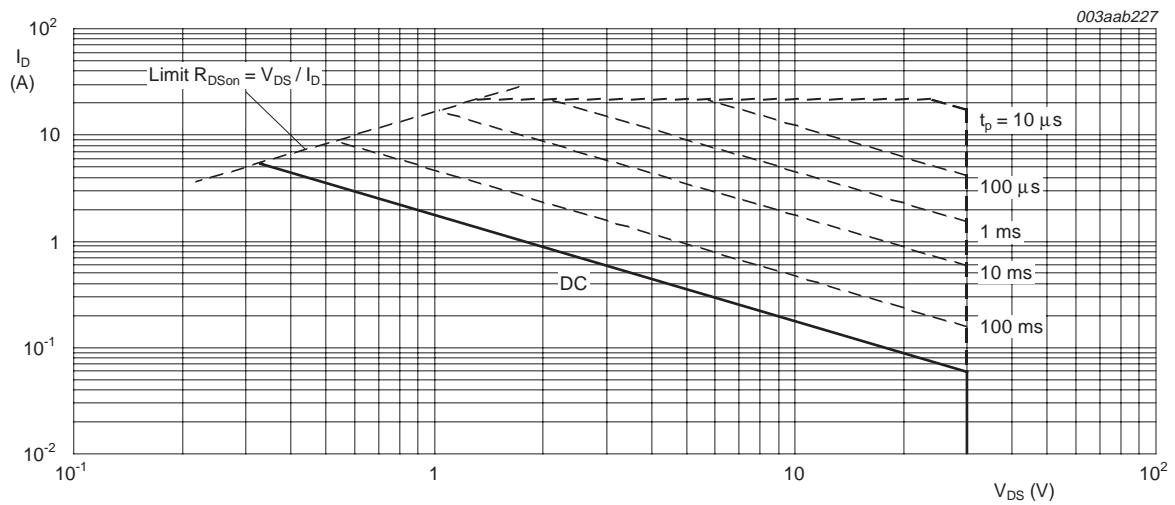

T<sub>sp</sub> = 25 °C; I<sub>DM</sub> is single pulse


Fig 3. Safe operating area; continuous and peak drain currents as a function of drain-source voltage

## 5. Thermal characteristics

Table 4: Thermal characteristics

| Symbol         | Parameter  | Conditions                   | Min | Typ | Max | Unit |
|----------------|--|------------------------------|-----|-----|-----|------|
| $R_{th(j-sp)}$ | thermal resistance from junction to solder point | see <a href="#">Figure 4</a> | [1] | -   | 70  | K/W  |


[1] Mounted on a metal clad board

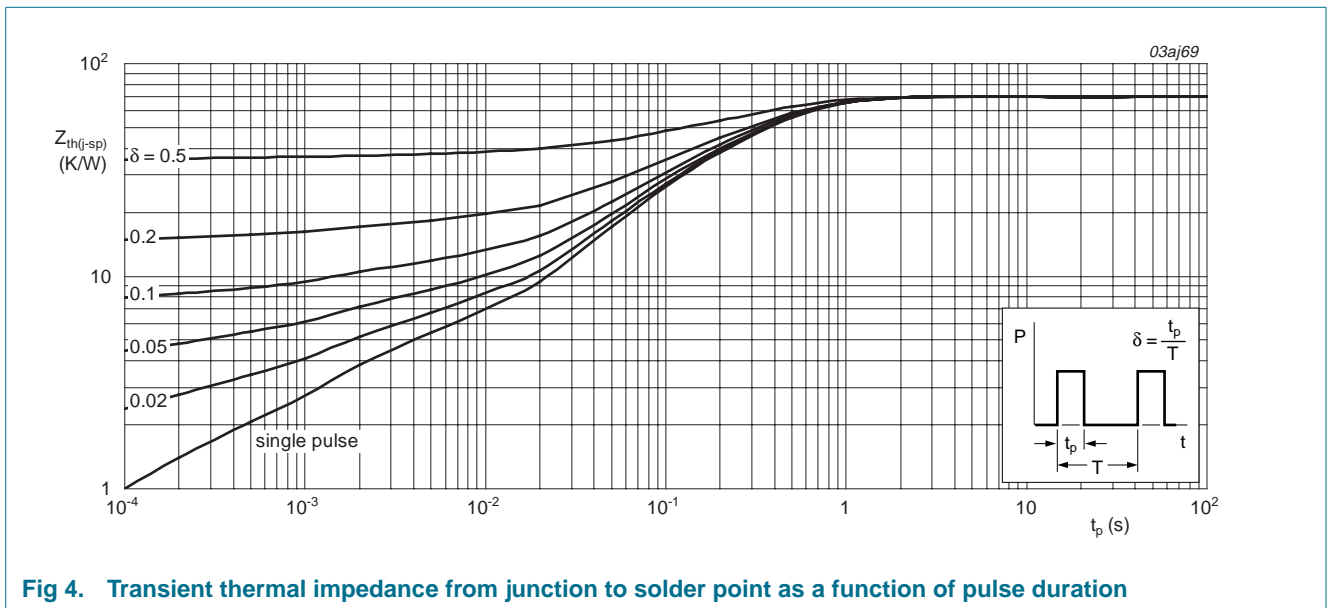

## 6. Characteristics


**Table 5: Characteristics**
*T<sub>j</sub> = 25 °C unless otherwise specified.*

| Symbol                         | Parameter                        | Conditions  | Min | Typ  | Max  | Unit |
|--------------------------------|----------------------------------|---|-----|------|------|------|
| <b>Static characteristics</b>  |                                  |   |     |      |      |      |
| V <sub>(BR)DSS</sub>           | drain-source breakdown voltage   | I <sub>D</sub> = 250 μA; V <sub>GS</sub> = 0 V  |     |      |      |      |
|                                |                                  | T <sub>j</sub> = 25 °C  | 30  | -    | -    | V    |
|                                |                                  | T <sub>j</sub> = -55 °C   | 27  | -    | -    | V    |
| V <sub>GS(th)</sub>            | gate-source threshold voltage    | I <sub>D</sub> = 1 mA; V <sub>DS</sub> = V <sub>GS</sub> ; see <a href="#">Figure 9</a> and <a href="#">10</a>              |     |      |      |      |
|                                |                                  | T <sub>j</sub> = 25 °C  | 1   | 1.5  | 2    | V    |
|                                |                                  | T <sub>j</sub> = 150 °C   | 0.6 | -    | -    | V    |
|                                |                                  | T <sub>j</sub> = -55 °C   | -   | -    | 2.2  | V    |
| I <sub>DSS</sub>               | drain leakage current            | V <sub>DS</sub> = 30 V; V <sub>GS</sub> = 0 V   |     |      |      |      |
|                                |                                  | T <sub>j</sub> = 25 °C  | -   | 0.01 | 1.0  | μA   |
|                                |                                  | T <sub>j</sub> = 150 °C   | -   | -    | 10   | μA   |
| I <sub>GSS</sub>               | gate leakage current             | V <sub>GS</sub> = ±20 V; V <sub>DS</sub> = 0 V  | -   | 10   | 100  | nA   |
| R <sub>DS(on)</sub>            | drain-source on-state resistance | V <sub>GS</sub> = 10 V; I <sub>D</sub> = 3 A; see <a href="#">Figure 6</a> and <a href="#">8</a>                            |     |      |      |      |
|                                |                                  | T <sub>j</sub> = 25 °C  | -   | 31   | 38   | mΩ   |
|                                |                                  | T <sub>j</sub> = 150 °C   | -   | 49.6 | 60.9 | mΩ   |
|                                |                                  | V <sub>GS</sub> = 4.5 V; I <sub>D</sub> = 2.8 A; see <a href="#">Figure 6</a> and <a href="#">8</a>                         | -   | 38   | 46   | mΩ   |
| <b>Dynamic characteristics</b> |                                  |   |     |      |      |      |
| Q <sub>G(tot)</sub>            | total gate charge                | I <sub>D</sub> = 5 A; V <sub>DS</sub> = 15 V; V <sub>GS</sub> = 4.5 V; see <a href="#">Figure 11</a> and <a href="#">12</a> | -   | 6.1  | -    | nC   |
| Q <sub>GS</sub>                | gate-source charge               |   | -   | 1.7  | -    | nC   |
| Q <sub>GD</sub>                | gate-drain charge                |   | -   | 2.35 | -    | nC   |
| C <sub>iss</sub>               | input capacitance                | V <sub>GS</sub> = 0 V; V <sub>DS</sub> = 25 V; f = 1 MHz; see <a href="#">Figure 14</a>                                     | -   | 495  | -    | pF   |
| C <sub>oss</sub>               | output capacitance               |   | -   | 100  | -    | pF   |
| C <sub>rss</sub>               | reverse transfer capacitance     |   | -   | 70   | -    | pF   |
| t <sub>d(on)</sub>             | turn-on delay time               | V <sub>DS</sub> = 15 V; R <sub>L</sub> = 12 Ω; V <sub>GS</sub> = 4.5 V; R <sub>G</sub> = 6 Ω                                | -   | 14   | -    | ns   |
| t <sub>r</sub>                 | rise time                        |   | -   | 19   | -    | ns   |
| t <sub>d(off)</sub>            | turn-off delay time              |   | -   | 28   | -    | ns   |
| t <sub>f</sub>                 | fall time                        |   | -   | 16   | -    | ns   |
| <b>Source-drain diode</b>      |                                  |   |     |      |      |      |
| V <sub>SD</sub>                | source-drain voltage             | I <sub>S</sub> = 1.7 A; V <sub>GS</sub> = 0 V; see <a href="#">Figure 13</a>  | -   | 0.75 | 1.2  | V    |

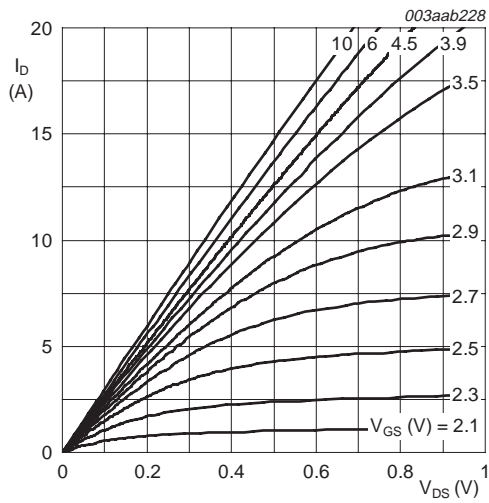


$T_j = 25\text{ }^\circ\text{C}$

Fig 5. Output characteristics: drain current as a function of drain-source voltage; typical values

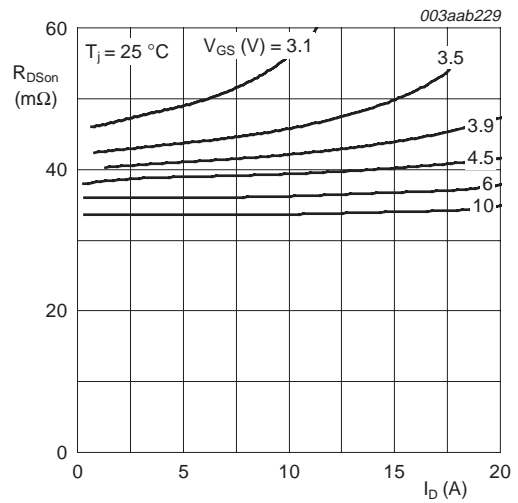


$T_j = 25\text{ }^\circ\text{C}$

Fig 6. Drain-source on-state resistance as a function of drain current; typical values

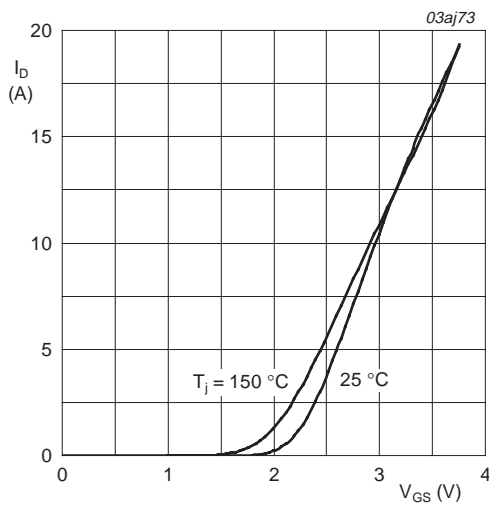


$T_j = 25\text{ }^\circ\text{C}$  and  $150\text{ }^\circ\text{C}$ ;  $V_{DS} > I_D \times R_{DSon}$

Fig 7. Transfer characteristics: drain current as a function of gate-source voltage; typical values

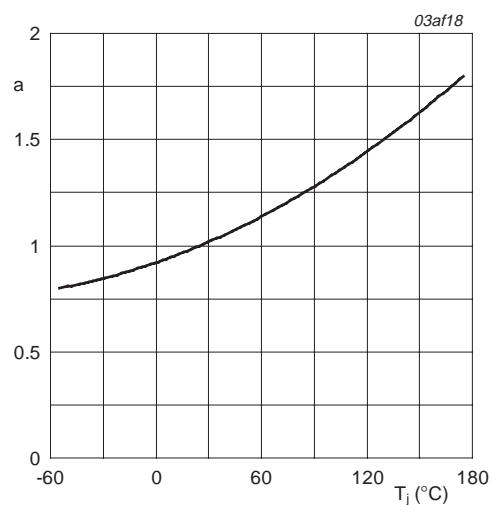


$$a = \frac{R_{DSon}}{R_{DSon(25\text{ }^\circ\text{C})}}$$

Fig 8. Normalized drain-source on-state resistance factor as a function of junction temperature

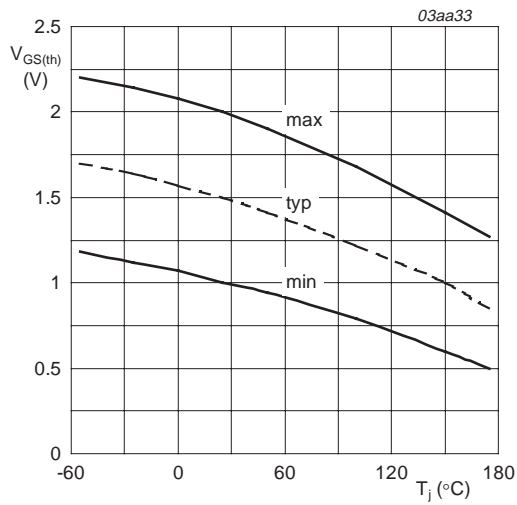


$I_D = 1 \text{ mA}; V_{DS} = V_{GS}$

Fig 9. Gate-source threshold voltage as a function of junction temperature

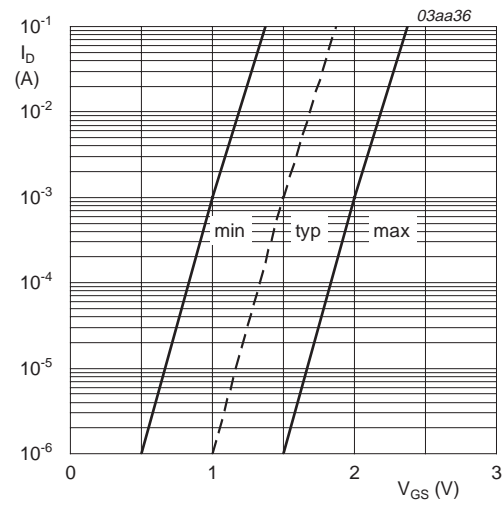

$T_j = 25 \text{ }^{\circ}C; V_{DS} = 5 \text{ V}$

Fig 10. Sub-threshold drain current as a function of gate-source voltage

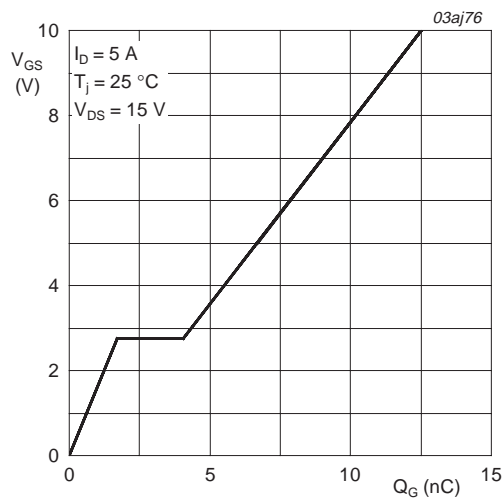

$I_D = 5 \text{ A}; V_{DS} = 15 \text{ V}$

Fig 11. Gate-source voltage as a function of gate charge; typical values



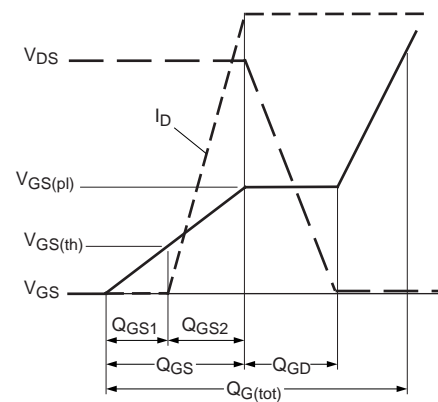


Fig 12. Gate charge waveform definitions

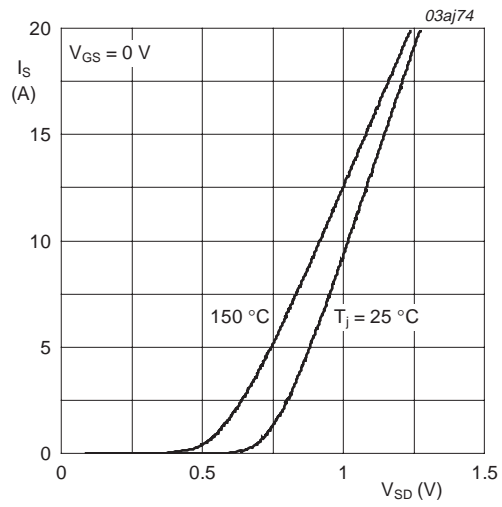

$T_j = 25 \text{ °C}$  and  $150 \text{ °C}$ ;  $V_{GS} = 0 \text{ V}$

**Fig 13. Source current as a function of source-drain voltage; typical values**

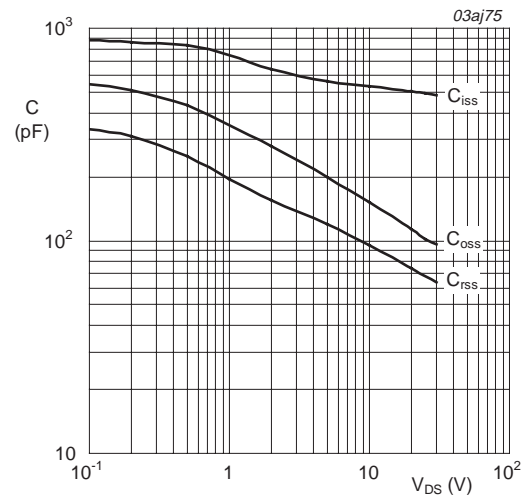

$V_{GS} = 0 \text{ V}$ ;  $f = 1 \text{ MHz}$

**Fig 14. Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values**



7. Package outline

Plastic surface mounted package (TSOP6); 6 leads

SOT457

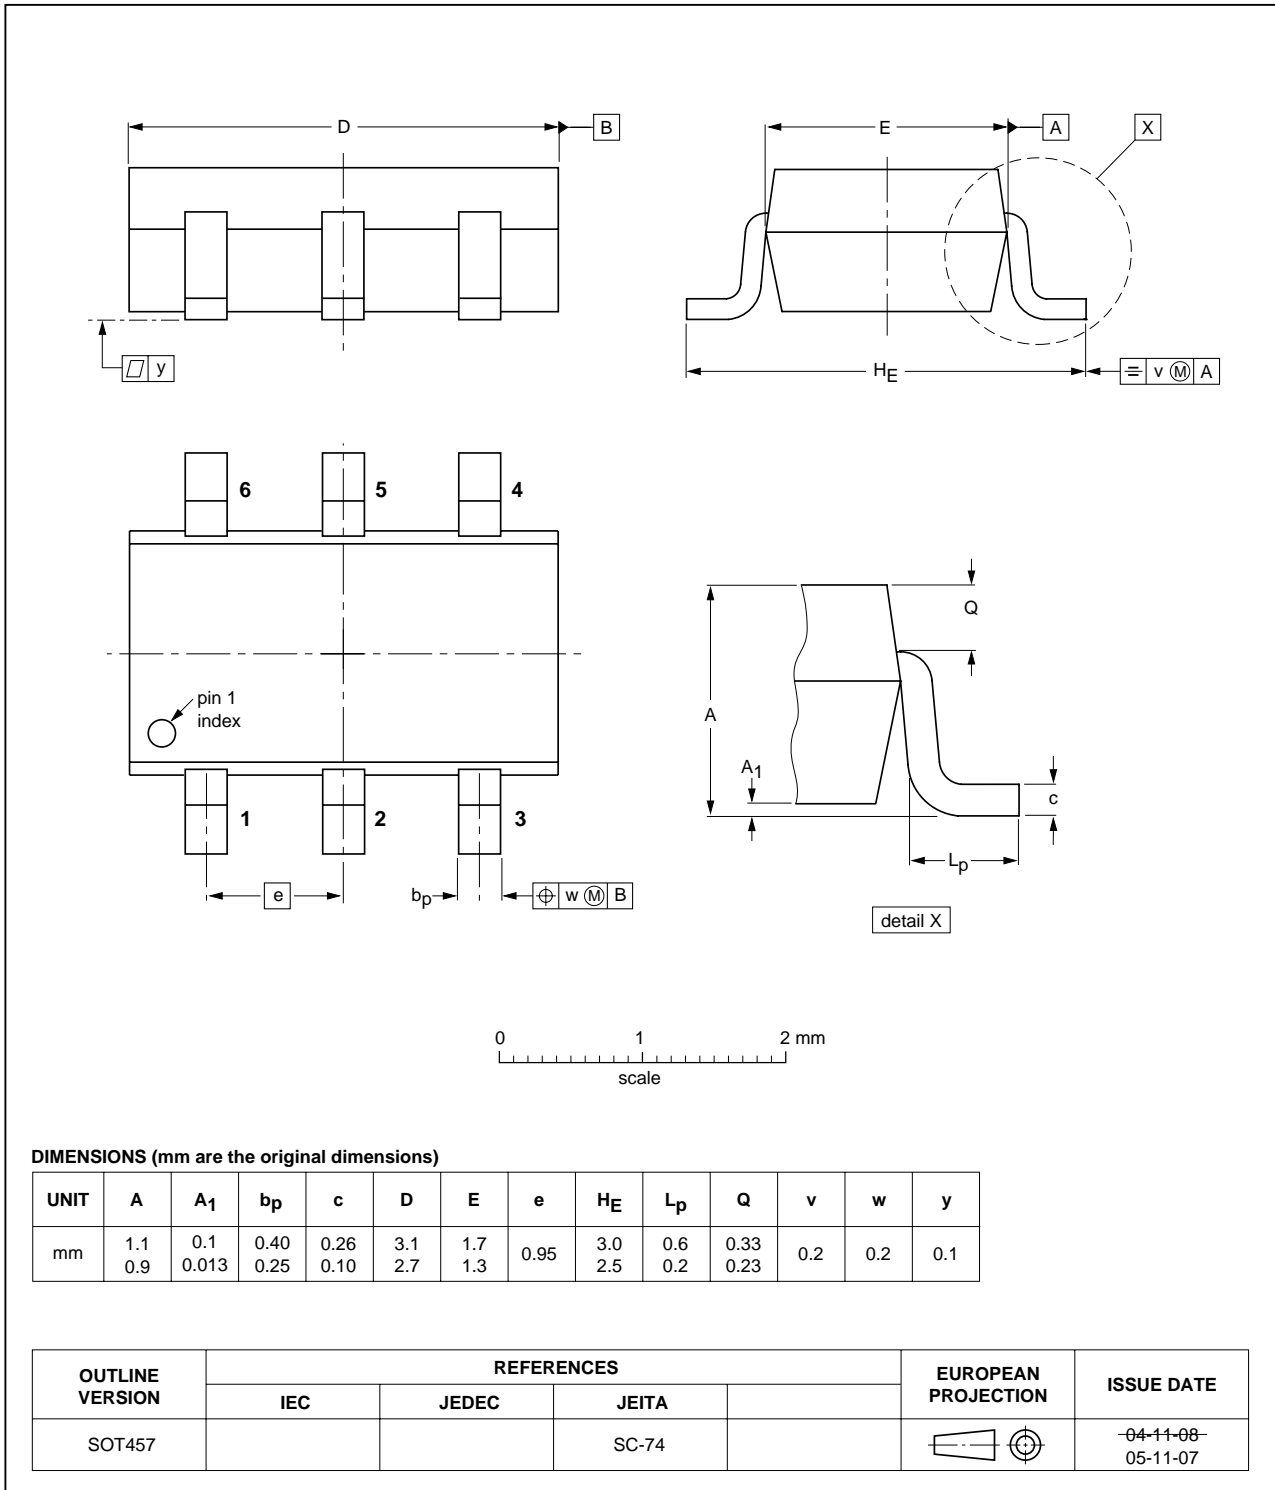


Fig 15. Package outline SOT457 (TSOP6)

## 8. Revision history

Table 6: Revision history

| Document ID | Release date | Data sheet status  | Change notice | Doc. number | Supersedes |
|-------------|--------------|--------------------|---------------|-------------|------------|
| PMN38EN_1   | 20060113     | Product data sheet | -             | -           | -          |

## 9. Data sheet status

| Level | Data sheet status <sup>[1]</sup> | Product status <sup>[2] [3]</sup> | Definition   |
|-------|----------------------------------|-----------------------------------|--|
| I     | Objective data                   | Development                       | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.  |
| II    | Preliminary data                 | Qualification                     | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                        | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## 10. Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## 11. Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors

## 13. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## 12. Trademarks

**Notice** — All referenced brands, product names, service names and trademarks are the property of their respective owners.

**TrenchMOS** — is a trademark of Koninklijke Philips Electronics N.V.

## 14. Contents

|           |                                      |           |
|-----------|--------------------------------------|-----------|
| <b>1</b>  | <b>Product profile</b> .....         | <b>1</b>  |
| 1.1       | General description .....            | 1         |
| 1.2       | Features .....                       | 1         |
| 1.3       | Applications .....                   | 1         |
| 1.4       | Quick reference data .....           | 1         |
| <b>2</b>  | <b>Pinning information</b> .....     | <b>1</b>  |
| <b>3</b>  | <b>Ordering information</b> .....    | <b>2</b>  |
| <b>4</b>  | <b>Limiting values</b> .....         | <b>2</b>  |
| <b>5</b>  | <b>Thermal characteristics</b> ..... | <b>4</b>  |
| <b>6</b>  | <b>Characteristics</b> .....         | <b>5</b>  |
| <b>7</b>  | <b>Package outline</b> .....         | <b>9</b>  |
| <b>8</b>  | <b>Revision history</b> .....        | <b>10</b> |
| <b>9</b>  | <b>Data sheet status</b> .....       | <b>11</b> |
| <b>10</b> | <b>Definitions</b> .....             | <b>11</b> |
| <b>11</b> | <b>Disclaimers</b> .....             | <b>11</b> |
| <b>12</b> | <b>Trademarks</b> .....              | <b>11</b> |
| <b>13</b> | <b>Contact information</b> .....     | <b>11</b> |



© Koninklijke Philips Electronics N.V. 2006

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: 13 January 2006  
Document number: PMN38EN\_1

Published in The Netherlands