


PHASE NOISE (1 Hz BW, typical)

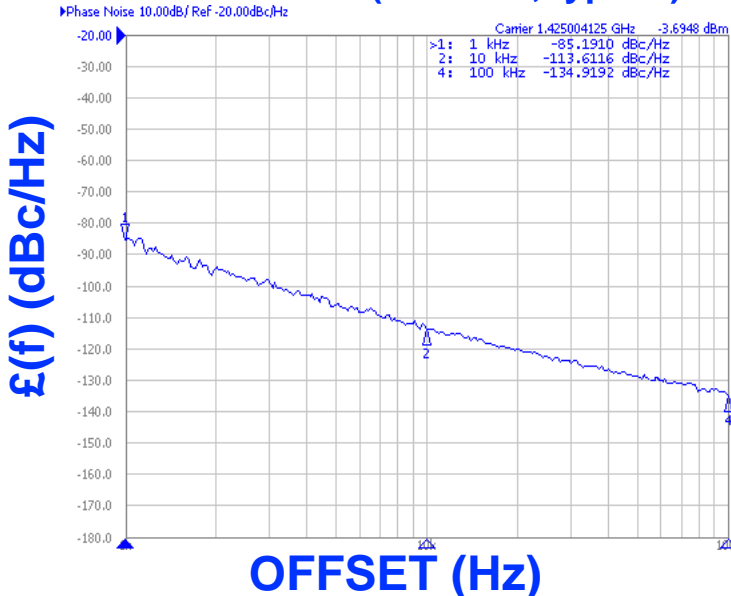

FEATURES

- Frequency Range: 1415 - 1435 MHz
- Tuning Voltage: 0-10 Vdc
- MINI-16H - Style Package

APPLICATIONS

- Mobile Communications
- Wireless Radio
- Basestations

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	1415 - 1435	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-112	dBc/Hz
Harmonic Suppression (2nd, typ.)	-20	dBc
Tuning Voltage	0-10	Vdc
Tuning Sensitivity (avg.)	6	MHz/V
Power Output	3±2	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<1	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<1	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16H	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	30	mA

All specifications are typical unless otherwise noted and subject to change without notice.


APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs


NOTES:

RoHS Compliant.


TUNING CURVE, typ.

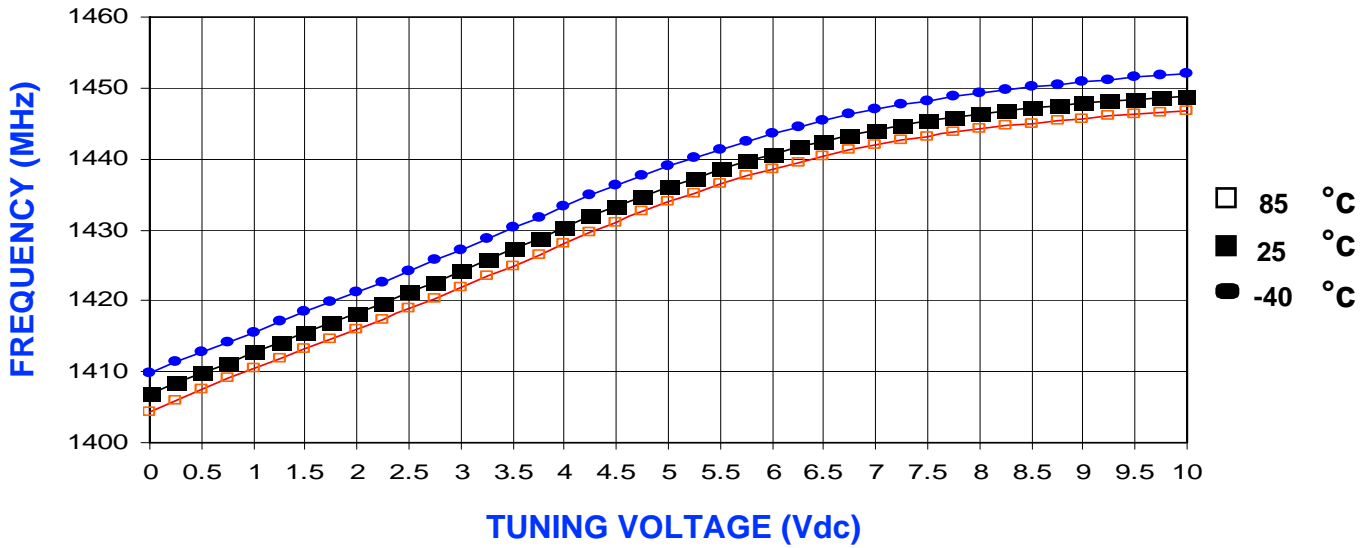

POWER CURVE, typ.

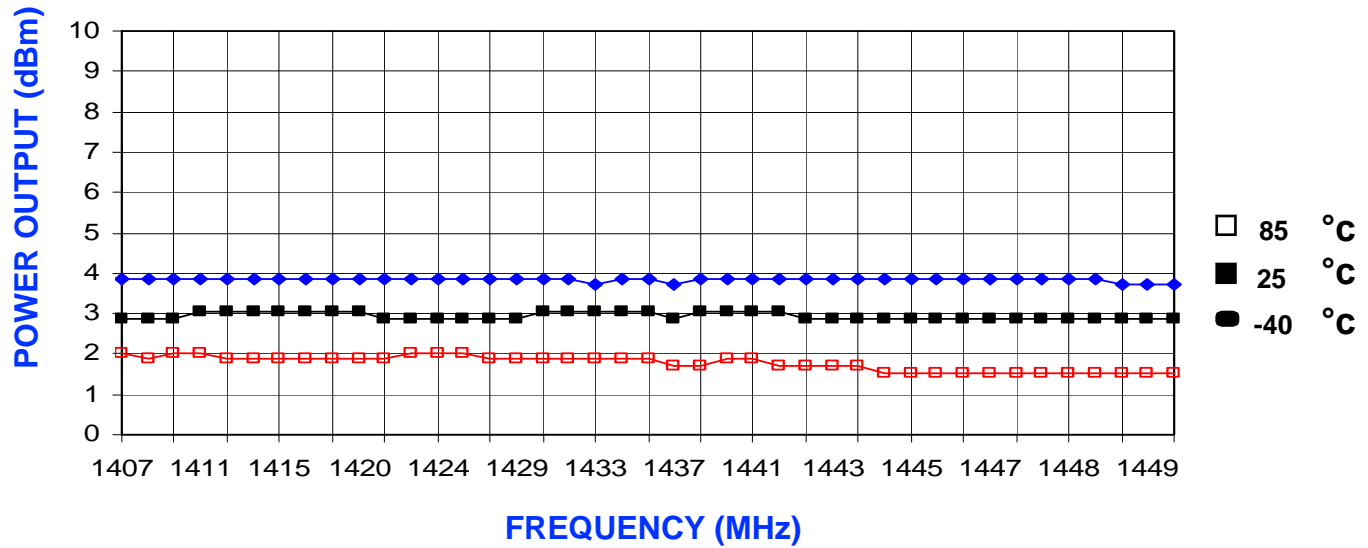

PHYSICAL DIMENSIONS

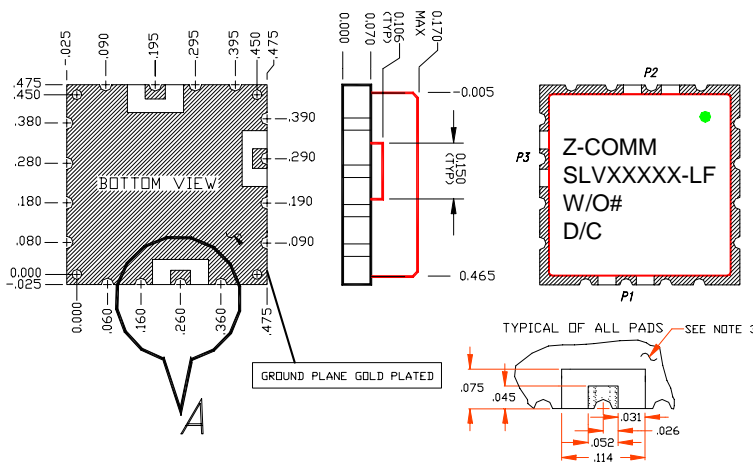

- NOTES**
1. The inside radius of all 16 half holes at the perimeter of the board are plated to provide a surface for the attachment of the VCO Module to the PCB. 13 pads are for grounding, 3 pads are for RFout and power supplies.
 2. The surface of the shield is tin-plated and may be soldered to. The shield's base metal is cold rolled steel.
 3. The ground plane on the bottom side is ground and attaches to a ground track on the top side of the board as well as to the shield.
 4. Unless otherwise noted all dimensions are in inches.
 5. Unless otherwise noted all tolerances are as follows:
.xxx = ± .010

P1 Vt
P2 RF Out
P3 Vcc
Rest: Ground