



DATA SHEET

SS1030FL

SURFACE MOUNT SCHOTTKY BARRIER

VOLTAGE 30 Volts **CURRENT** 1.0 Amperes

SOD-123FL


Unit: inch (mm)

FEATURES

- Fast switching speed
- Surface mount package ideally suited for automatic insertion
- Electrical identical standard JEDEC.
- High conductor
- Both normal and Pb free product are available :
 Normal : 80~95% Sn, 5~20% Pb
 Pb free: 99% Sn above can meet Rohs environment substance directive request

MECHANICAL DATA

Case: SOD-123FL, Plastic
 Terminals: Solderable per MIL-STD-202G, Method 208
 Approx. Weight: 0.0168 gram
 Marking : G3

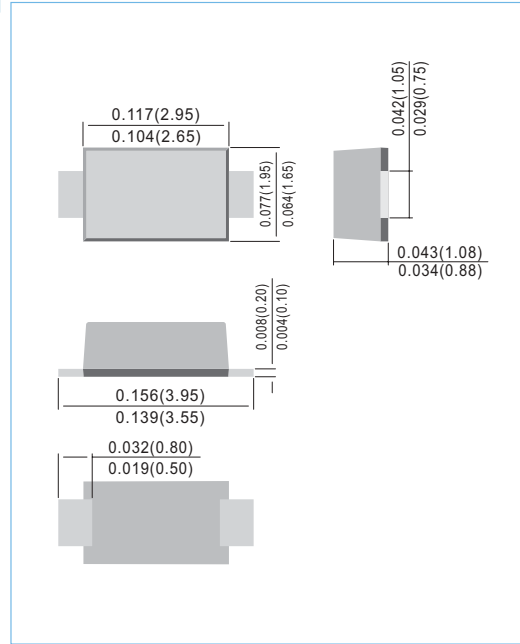

ABSOLUTE RATINGS

PARAMETER	Symbol	Value	Units
Reverse Voltage	V_R	30	V
Peak Reverse Voltage	V_{RRM}	30	V
Average Rectified Current at Temp=75°C	I_o	1.0	A
Non-repetitive Peak Forward Surge Current at t=8.3ms	I_{FSM}	30	A

THERMAL CHARACTERISTICS

PARAMETER	Symbol	Value	Units
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	88	°C/W
Junction Temperature	T_J	125	°C
Storage Temperature at Temp=25°C	T_{lSTG}	-55 to 150	°C





Note.1 Mounted with minimum recommended pad size, PC Board FR4.



ELECTRICAL CHARACTERISTICS


PARAMETER	Symbol	Test Condition	MIN.	TYP.	MAX.	Units
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=500 \mu A$	30	--	--	V
Reverse Current	I_R	$V_R=30 V$	--	--	500	μA
Forward Voltage	V_F	$I_F=1.0 A$	--	--	0.55	V

RATING AND CHARACTERISTIC CURVES

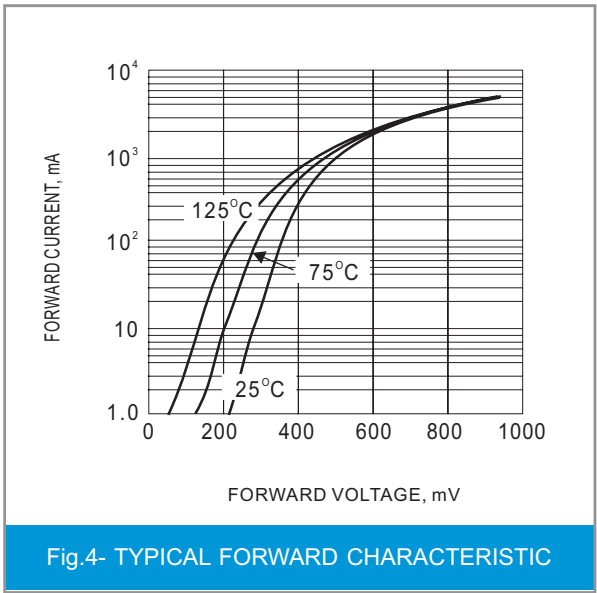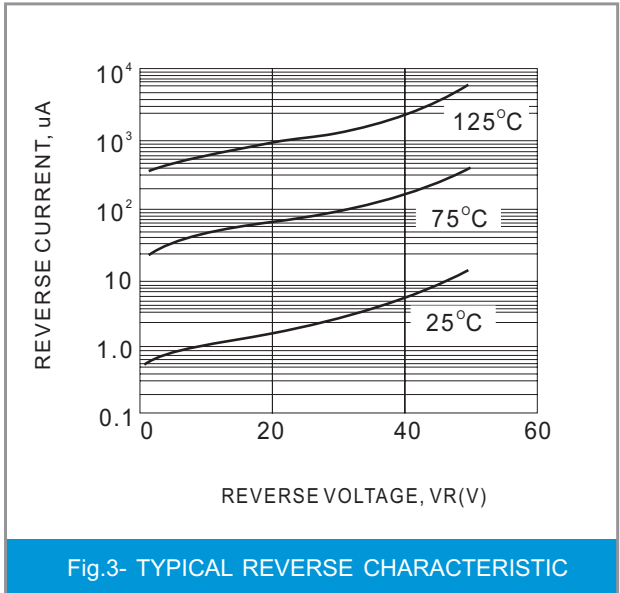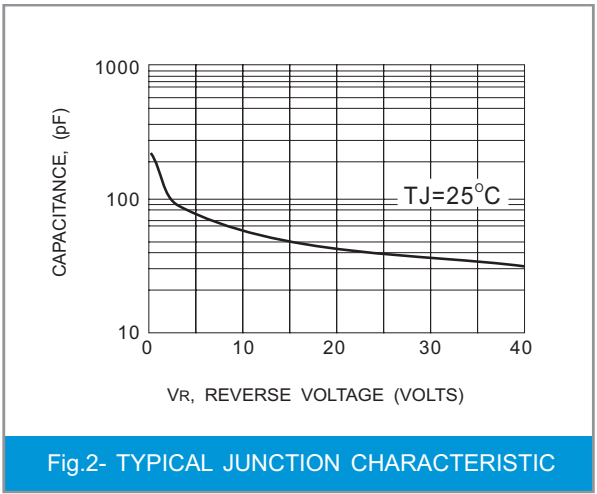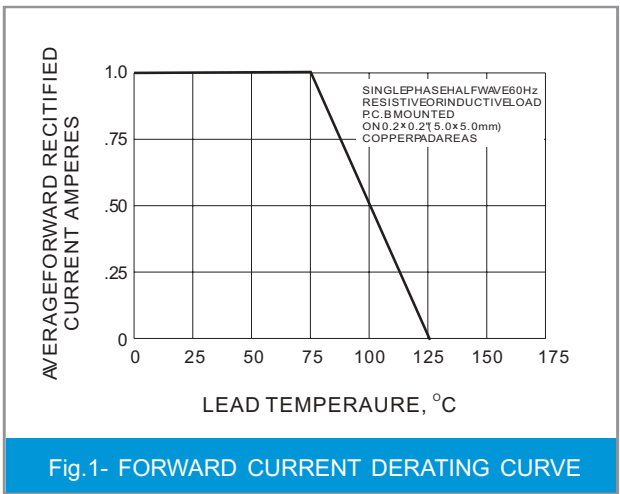



MOUNTING PAD LAYOUT

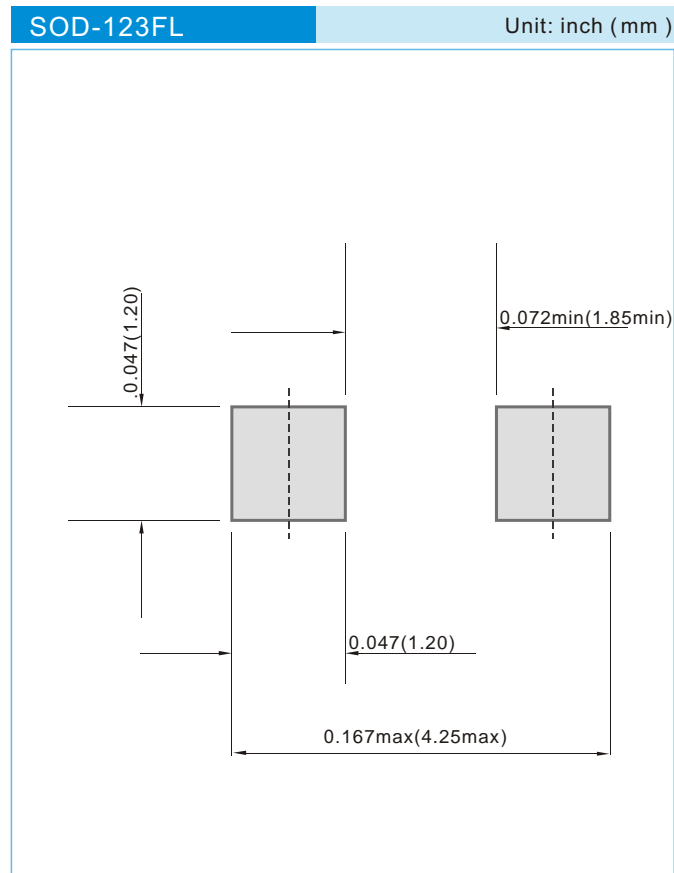

ORDER INFORMATION

- Packing information

T/R - 10K per 13" plastic Reel

T/R - 3.0K per 7" plastic Reel

LEGAL STATEMENT

IMPORTANT NOTICE

This information is intended to unambiguously characterize the product in order to facilitate the customer's evaluation of the device in the application. The information will help the customer's technical experts determine that the device is compatible and interchangeable with similar devices made by other vendors. The information in this data sheet is believed to be reliable and accurate. The specifications and information herein are subject to change without notice. New products and improvements in products and product characterization are constantly in process. Therefore, the factory should be consulted for the most recent information and for any special characteristics not described or specified.

Copyright Pan Jit International Inc. 2004

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract. The information presented is believed to be accurate and reliable, and may change without notice in advance. No liability will be accepted by the publisher for any consequence of use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.