

8A Schottky Rectifier

Features

- Low Forward Voltage Drop
- Low Power Loss, High Efficiency
- High Surge Current Capability
- High temperature soldering guaranteed:
260° C/10 seconds, / .037" (9.5mm) lead length
- RoHS Compliant



DO-201AD



Mechanical Data

Case:	DO-201AD, Molded Plastic
Terminals:	Axial leads, solderable per MIL-STD-750, Method 2026
Polarity:	Cathode band, Laser marking
Weight:	1.1 gram

Maximum Ratings *(T_{Ambient}=25°C unless noted otherwise)*

Symbol	Description	TSR835	TSR845	TSR850	TSR860	Unit	Conditions
V_{RRM}	Max. Repetitive Peak Reverse Voltage	35	45	50	60	V	
V_{RMS}	Max. RMS Voltage	25	32	35	42	V	
V_{DC}	Max. DC Blocking Voltage	35	45	50	60	V	
I_{F(AV)}	Average Forward Rectified Current	8.0				A	Resistive Load and f>=50Hz
I_{FSM}	Peak Forward Surge Current	150				A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
V_F	Max. Instantaneous Forward Voltage	0.55		0.70		V	I _F =8A
I_R	Max. DC Reverse Current at Rated DC Blocking Voltage	0.5				mA	T _A =25 °C
		50					T _A =100 °C
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-65 to +125				°C	

Typical Characteristics Curves

Fig.1- Forward Current Derating Curve

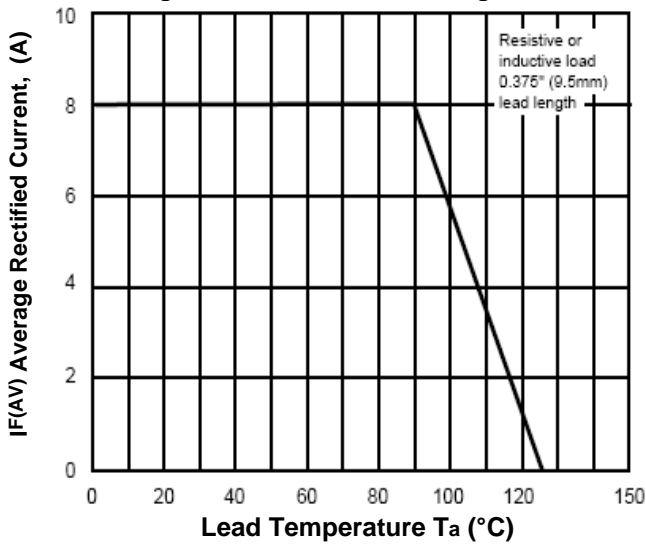


Fig.2- Max. Non-Repetitive Forward Surge Current

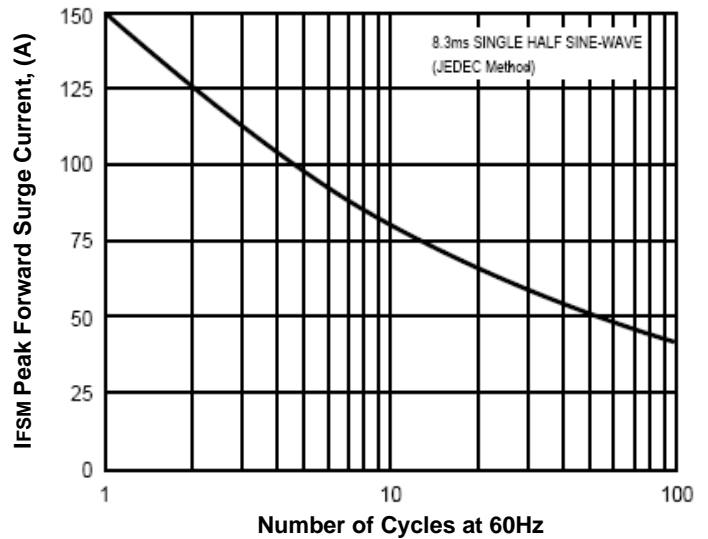


Fig.3- Typical Forward Characteristics


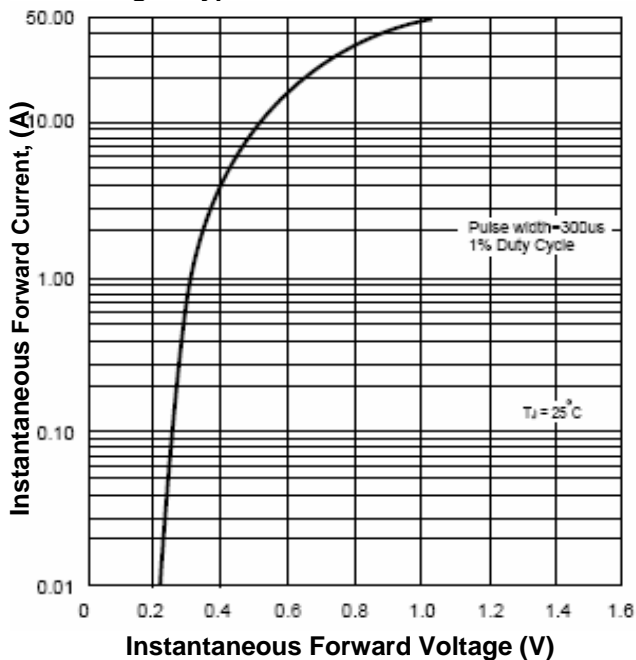



Fig.4- Typical Reverse Characteristics

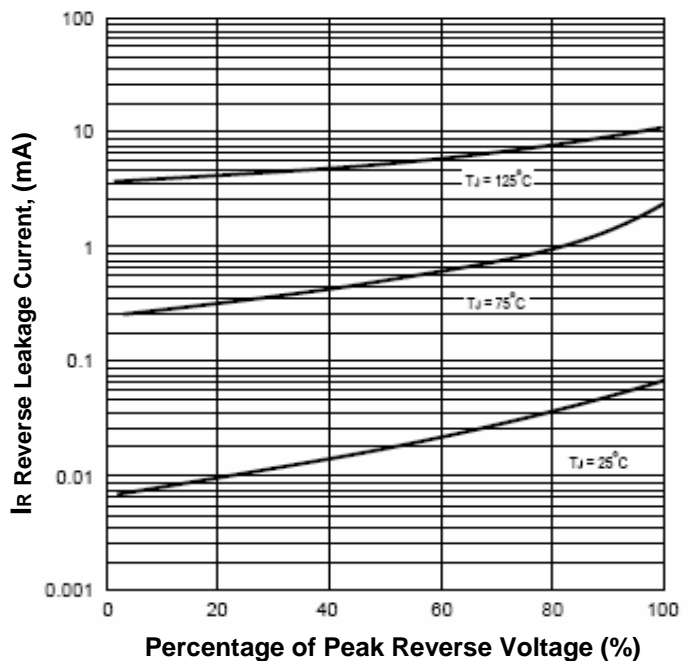


8A Schottky Rectifier

TSR835 - TSR860

Fig.5- Typical Junction Capacitance

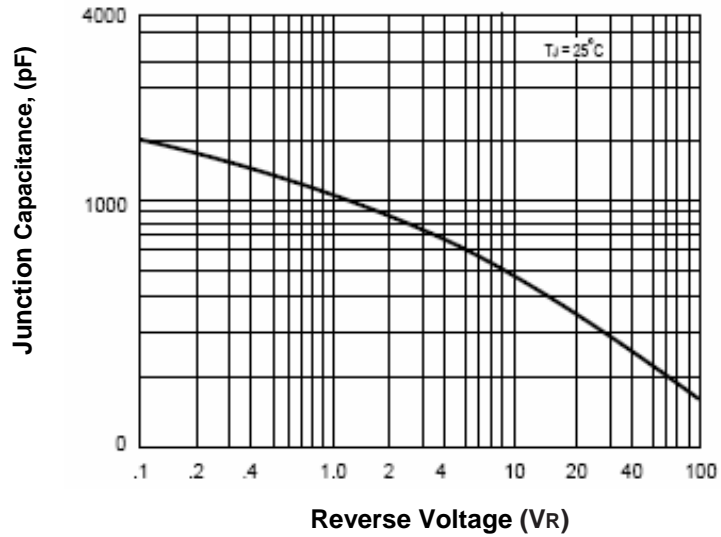


Dimensions in inches (mm)

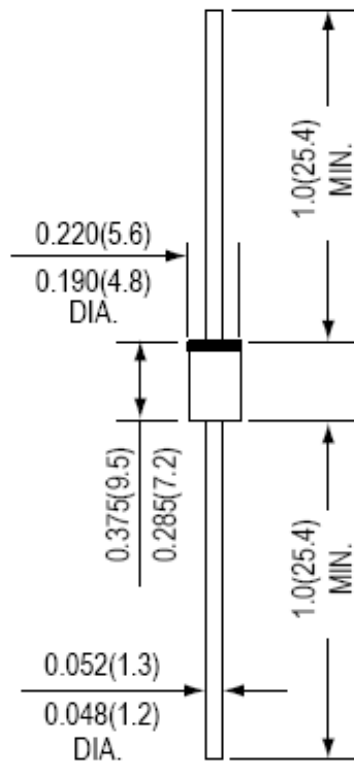

DO-201AD

Taping Information (in mm)

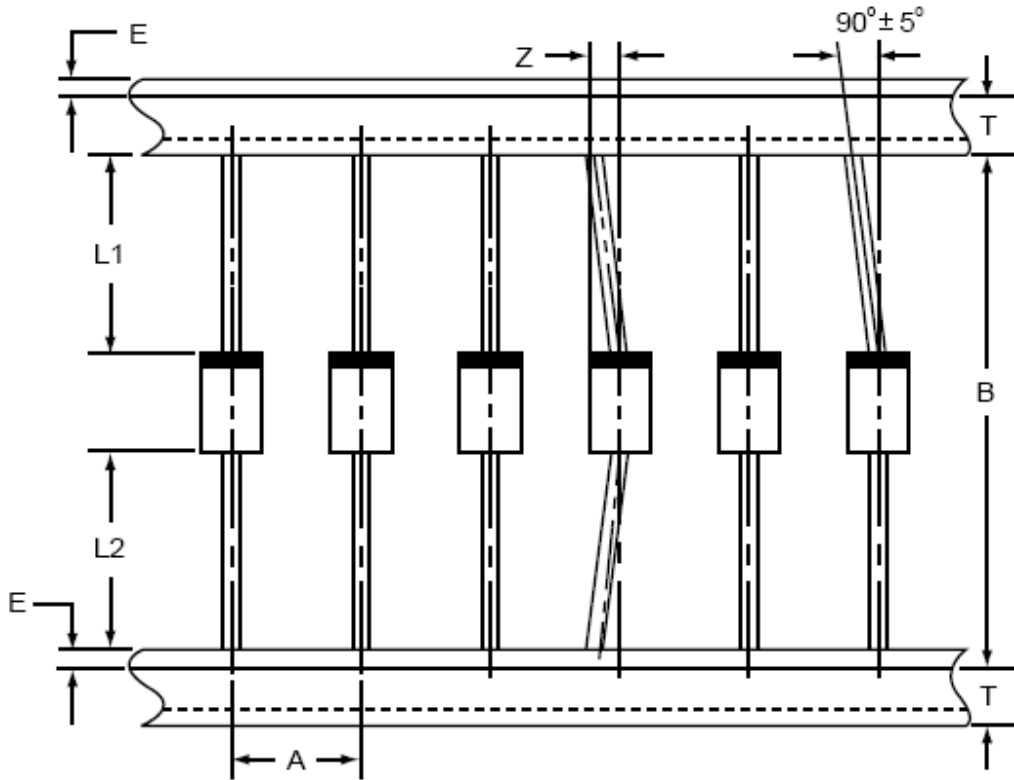

Components Outline	A	B	L1,L2	T	E	Z
DO-201AD	10±0.5	52±1	Max.1.0	6±0.4	Max.0.8	Max.1.2

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 247-2232 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931