

## Bidirectional DIAC Trigger Diode

### Features

- Low breakover current: 15µA Max.
- Excellent symmetry
- Very low leakage current
- Trigger diode with a fixed voltage reference
- High temperature soldering guaranteed:  
250°C/10s/9.5mm lead length at 5 lbs tension
- RoHS Compliance



DO-35



### Mechanical Data

<b>Case:</b>	Glass Case DO-35
<b>Terminals:</b>	Plated axial leads, solderable per MIL-STD-750, method 2026
<b>Weight:</b>	Approx. 0.13 gram

### Maximum Ratings and Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless noted otherwise)

Symbol	Description	Value			Unit	Conditions
		Min.	Typ.	Max.		
$V_{BO}$	Breakover Voltage*	30	32	34	V	$I_{BO}, C=22\text{nF}^{**}$
$ +V_{BO}  -  -V_{BO} $	Breakover Voltage Symmetry	-2	-	2	V	$I_{BO}, C=22\text{nF}^{**}$
$ \pm\Delta V $	Dynamic Breakover Voltage**	9	-	-	V	$V_{BO}$ and $V_F$ at 10mA
$V_O$	Output Voltage*	5	-	-	V	See Fig.6 (R=20Ω)
$I_{BO}$	Breakover Current*	-	-	15	µA	$C=22\text{nF}^{**}$
$T_r$	Rise Time*	-	-	2	µs	See Fig.5
$I_B$	Leakage Current*	-	-	10	µA	$V_B=0.5V_{BO}$ Max.
$I_P$	Peak Current*	0.3	-	-	A	See Fig.6 (Gate)
$P_d$	Power Dissipation on Printed Circuit	-	-	150	mW	$T_a=50^\circ\text{C}$
$I_{TRM}$	Repetitive Peak on-state Current	-	-	2	A	$t_p=20\mu\text{s}, f=100\text{Hz}$
$R_{thJA}$	Typical Thermal Resistance	-	-	400	°C / W	
$R_{thJL}$		-	-	150	°C / W	

# Bidirectional DIAC Trigger Diode

DB3B

Symbol	Description	Value	Unit	Conditions
T <sub>J</sub>	Operating Temperature range	-40 to + 110	°C	
T <sub>STG</sub>	Storage Temperature Range	-40 to + 125		

\*Electrical characteristic applicable in forward and reverse directions.

\*\*Connected in parallel with the devices.

## Typical Characteristics Curves

Fig.1-Max. Power Dissipation

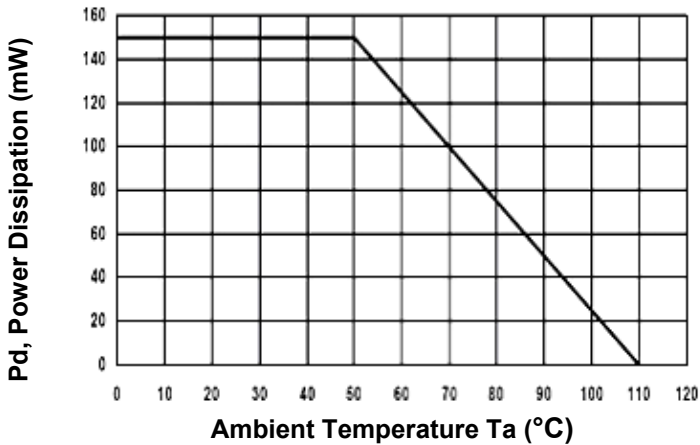


Fig.2- Typical Relative Variation of V<sub>BO</sub>

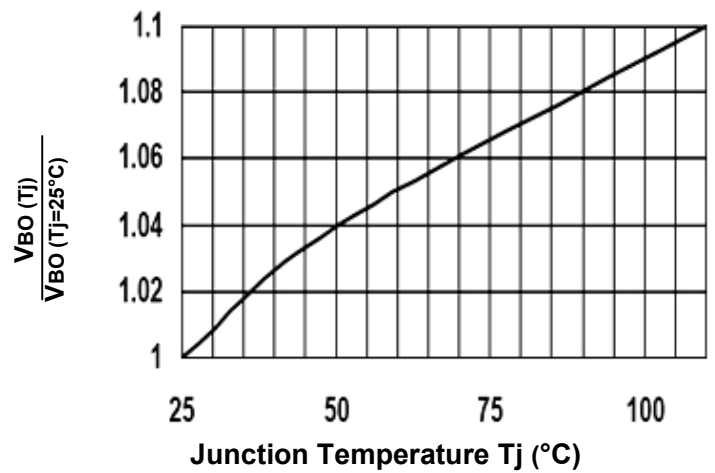


Fig.3- Peak Pulse Current

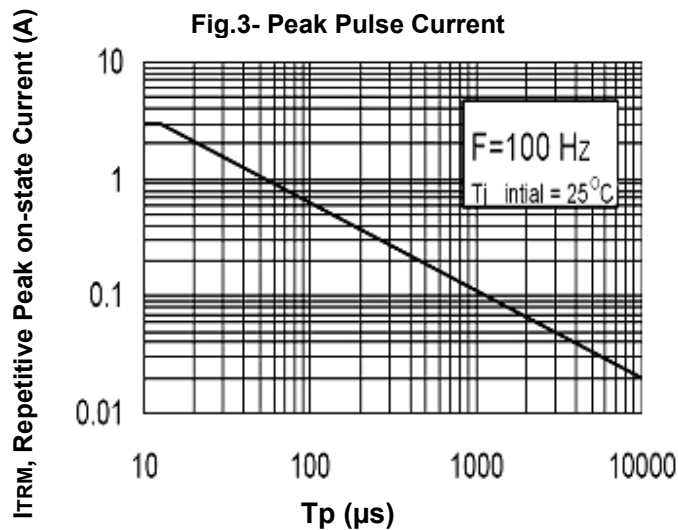


Fig.4-Voltage – Current characteristic Curve

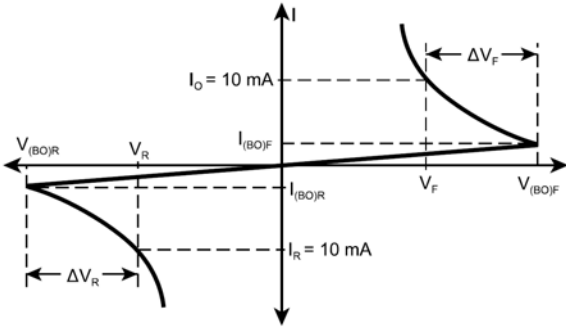


Fig.5- Rise Time Measurement


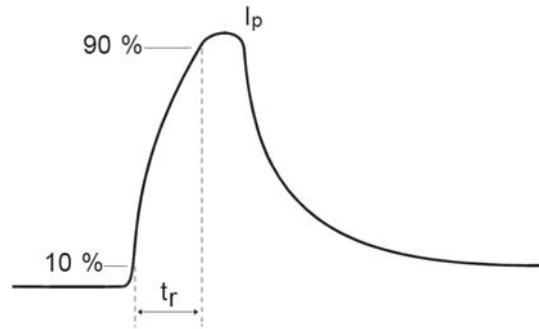



Fig.6-Test Circuit for Output Voltage

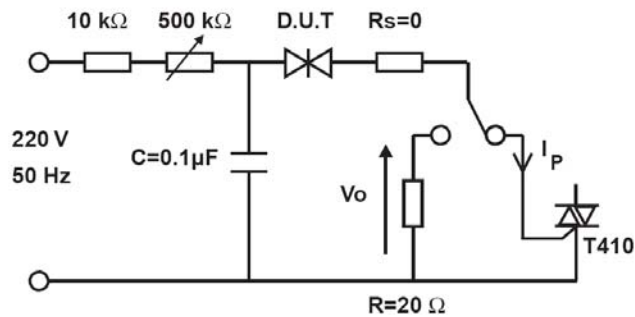

# Bidirectional DIAC Trigger Diode

DB3B

## Dimensions in inches (mm)

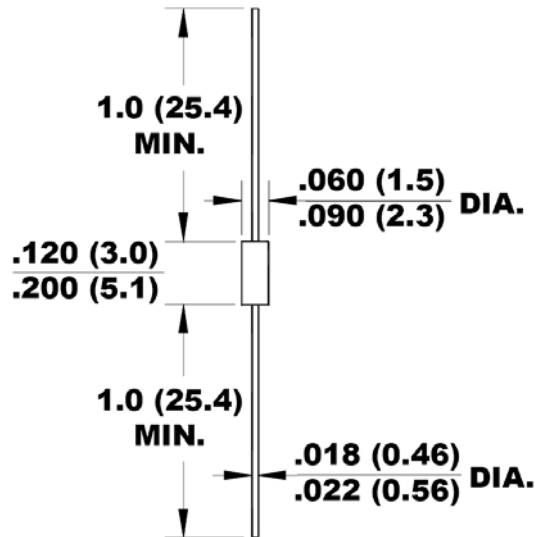

DO-35

## How to contact us:

### US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: [taitron@taitroncomponents.com](mailto:taitron@taitroncomponents.com)

Http://[www.taitroncomponents.com](http://www.taitroncomponents.com)

### TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

### TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

### TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

CROSS REGION PLAZA, 899 LINLING ROAD, SUITE 18C, SHANGHAI, 200030, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931