

## Silicon PNP Power Transistors

## 2SA1659 2SA1659A

**DESCRIPTION**


- With TO-220F package
- Complement to type 2SC4370/4370A
- High transition frequency  $f_T$

**APPLICATIONS**

- High voltage applications

**PINNING**

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

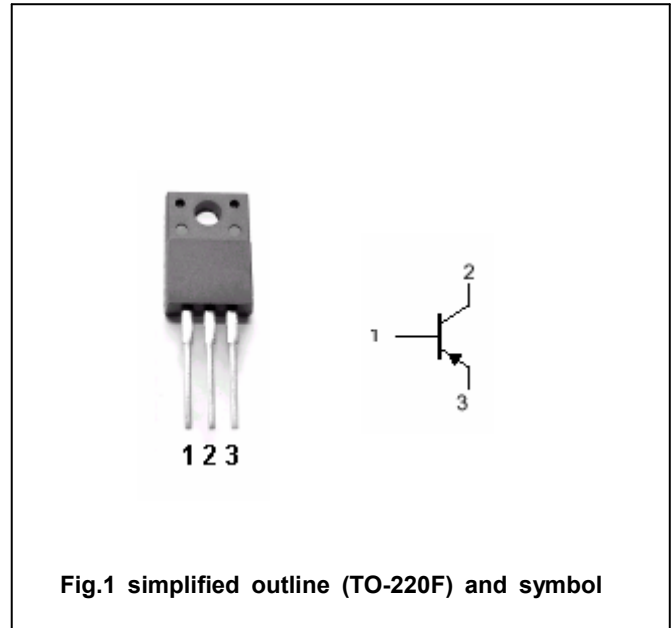**Absolute maximum ratings (Ta=25°C)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	2SA1659	-160	V
		2SA1659A	-180	
$V_{CEO}$	Collector-emitter voltage	2SA1659	-160	V
		2SA1659A	-180	
$V_{EBO}$	Emitter-base voltage	Open collector	-5	V
$I_C$	Collector current		-1.5	A
$I_B$	Base current		-0.15	A
$P_C$	Collector dissipation	$T_C=25^\circ\text{C}$	20	W
$T_j$	Junction temperature		150	°C
$T_{stg}$	Storage temperature		-55~150	°C

## Silicon PNP Power Transistors

## 2SA1659 2SA1659A

## CHARACTERISTICS

T<sub>j</sub>=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	2SA1659	-160			V
		2SA1659A	-180			
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-0.5A; I <sub>B</sub> =-50mA			-1.5	V
V <sub>BE</sub>	Base-emitter on voltage	I <sub>C</sub> =-0.5A; V <sub>CE</sub> =-5V			-1.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =-160V; I <sub>E</sub> =0			-1	μA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =-5V; I <sub>C</sub> =0			-1	μA
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =-0.1A; V <sub>CE</sub> =-5V	70		240	
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =-0.1A; V <sub>CE</sub> =-10V		100		MHz
C <sub>OB</sub>	Output capacitance	I <sub>E</sub> =0; V <sub>CB</sub> =-10V; f=1MHz		30		pF

◆ h<sub>FE</sub> classifications

O	Y
70-140	120-240

Silicon PNP Power Transistors

2SA1659 2SA1659A

PACKAGE OUTLINE

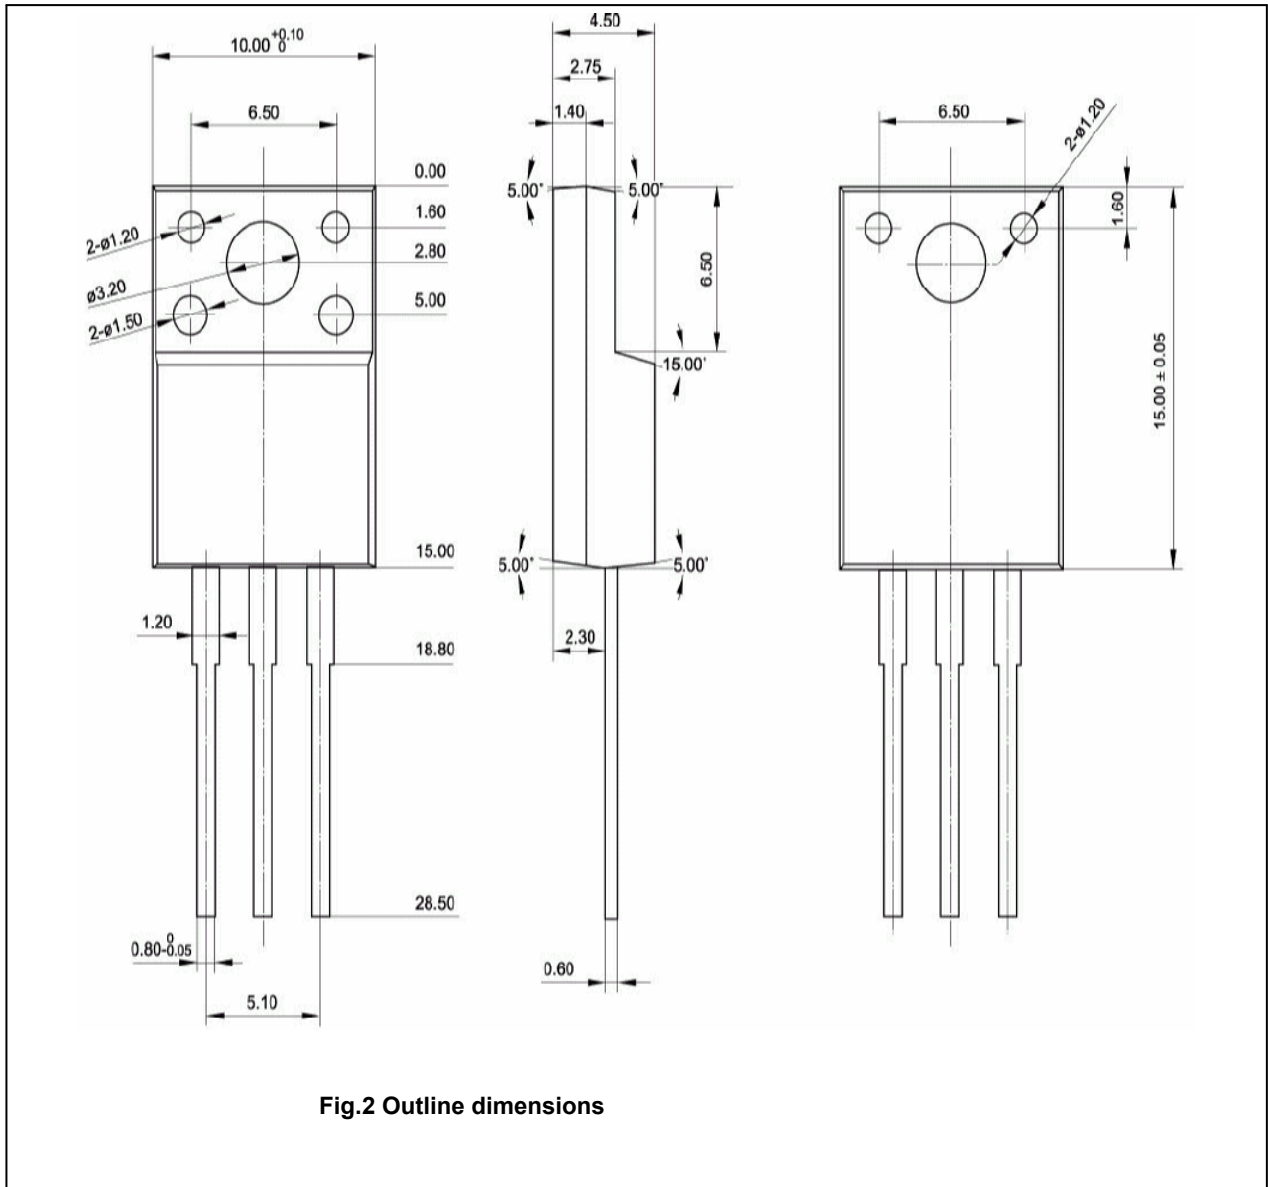


Fig.2 Outline dimensions