


VDL1584 TR Switch

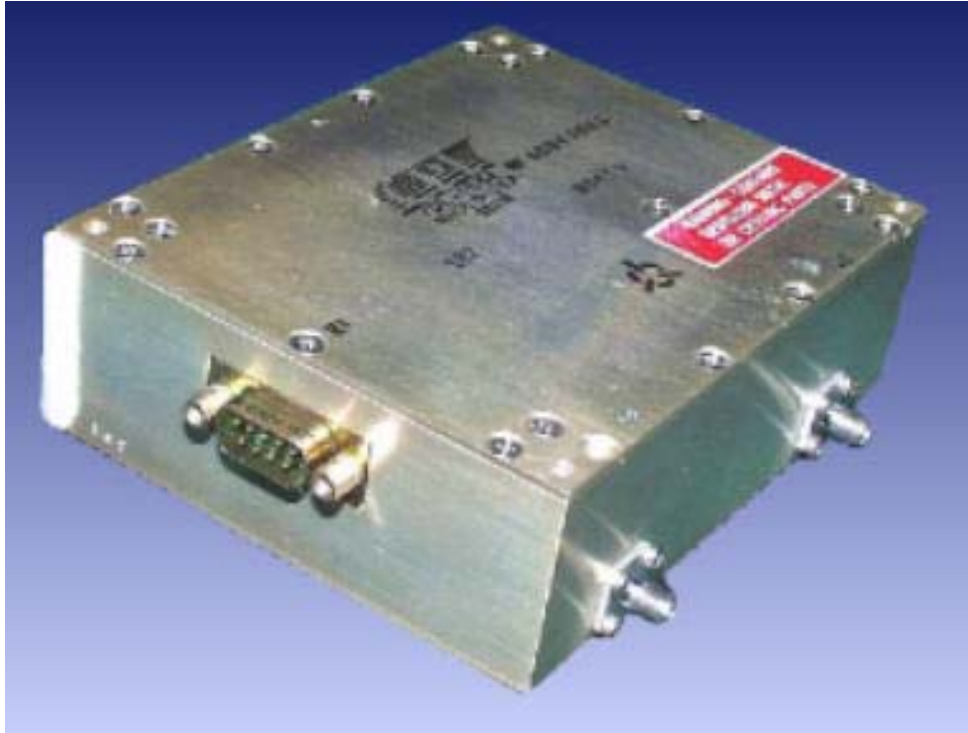

Description:

225 - 400 MHz TR Switch with integral RS-422 compatible driver.

Features:

- **Freq. Range: 225 to 400 MHz**
- **Maximum Power:**
 - Transmitter to Antenna: 200 W
 - Antenna to Receiver: 2 W
- **Duty Cycle: CW**
- **Insertion Loss: 0.7 dB max**
 - Transmitter to Antenna: 0.5 dB max
 - Antenna to Receiver: 1.0 dB max
- **Switching Time: 20 μ Sec max**
- **VSWR: 1.5:1**
- **Isolation**
 - Transmitter to Receiver: 75 dB min
 - Antenna to Transmitter: 50 dB min