

KR 2464 Bandpass Filter

General Description


KR 2464 is a 550 MHz bandpass filter. The minimum 3 dB bandwidth is 102 MHz. Please consult the factory for other center frequencies or bandwidths.

Features

- 550 MHz center frequency
- Sharp transition to 50 dB
- 50 Ω
- SMA connectors

Typical Performance

Overall Response
(10 dB/div)

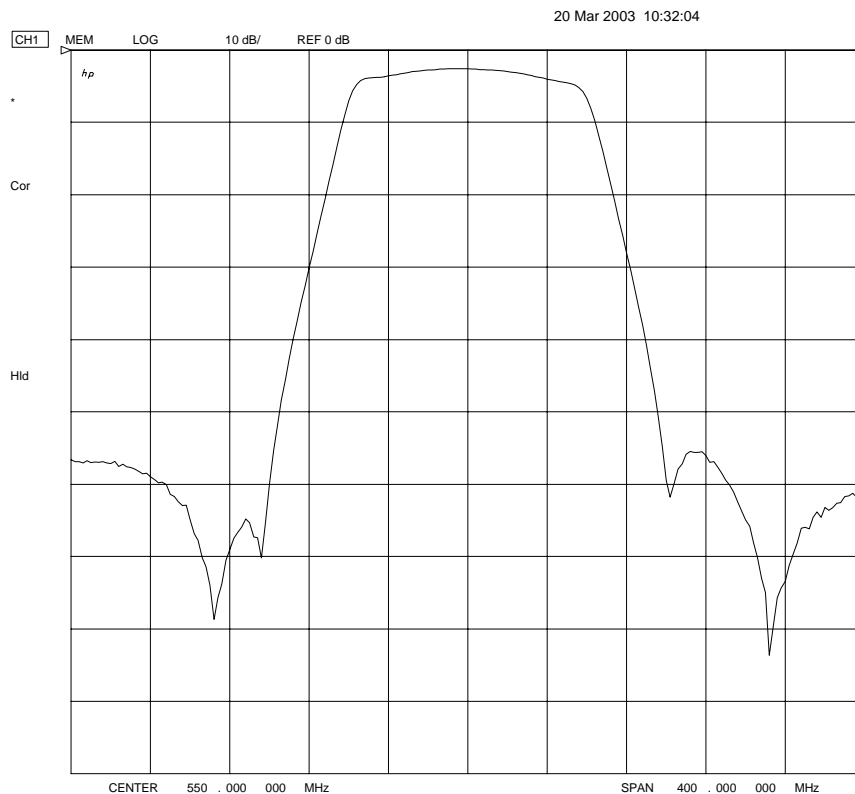

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2464

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	550 MHz
Insertion Loss	< 4 dB (2.5 dB Typical)
Attenuation at 449 MHz	> 50 dB
Attenuation at 499 MHz	< 3 dB
Attenuation at 601 MHz	< 3 dB
Attenuation at 651 MHz	> 50 dB
Source & Load	50 Ω

Physical Dimensions

