

Ovel Type LED lamp
BL-L557
■ Features:

- 5mm Ovel Type (5.0*4.1*7.1mm) LED Lamps
- Ultra brightness.
- Choice of various viewing angles.
- Diffused, Transparent and Water clear lens
- IC compatible /Low current capability.
- RoHs Compliance


■ Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (lv) Unit:mcd		Viewing Angle 2θ1/2 (deg)
	Emitted Color	Material	λ _p (nm)		Typ	Max	Min.	Typ.	
BL-L557SRC	Hi Red	AlGaAs,SH	660	Water Clear	1.85	2.20	50	250	X-X 70 Y-Y 40
BL-L557LRC	Super Red	AlGaAs,DH	660		1.85	2.20	200	600	
BL-L557URC	Ultra Red	AlGaAs,DDH	660		1.95	2.20	500	750	
BL-L557UEC	Ultra Orange	AlGaInP	630		2.10	2.50	250	800	
BL-L557UYC	Ultra Yellow	AlGaInP	590		2.10	2.50	250	800	
BL-L557UGC	Ultra Green	AlGaInP	574		2.20	2.50	100	250	
BL-L557PGC	Ultra Pure Green	InGaN	525		3.80	4.50	600	1800	
BL-L557BGC	Ultra Bluish Green	InGaN	505		3.80	4.50	550	1500	
BL-L557BC	Blue	InGaN	430		3.80	4.50	300	800	
BL-L557UBC	Ultra Blue	InGaN	470		2.70	4.20	600	1500	
BL-L557VC	UV	InGaN	405		3.80	4.50	50	90	
BL-L557UWC	Ultra White	InGaN	/		2.70	4.20	1000	2300	


■ Absolute maximum ratings (Ta=25°C)

Parameter	SR	LR	UR	UE	UY	UG	PG	BG	B	UB	UV	W	Unit
Forward Current I _F	25	25	25	30	30	30	30	30	30	30	30	30	mA
Power Dissipation P _d	60	60	60	65	65	75	110	110	120	120	120	120	mW
Reverse Voltage V _R	5	5	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current I _{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	100	100	100	100	100	mA
Operation Temperature T _{OPR}	-40 to +80												°C
Storage Temperature T _{STG}	-40 to +85												°C
Lead Soldering Temperature T _{SOL}	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)												°C

Ovel Type LED lamp

BL-L557

■ Package configuration & Internal circuit diagram

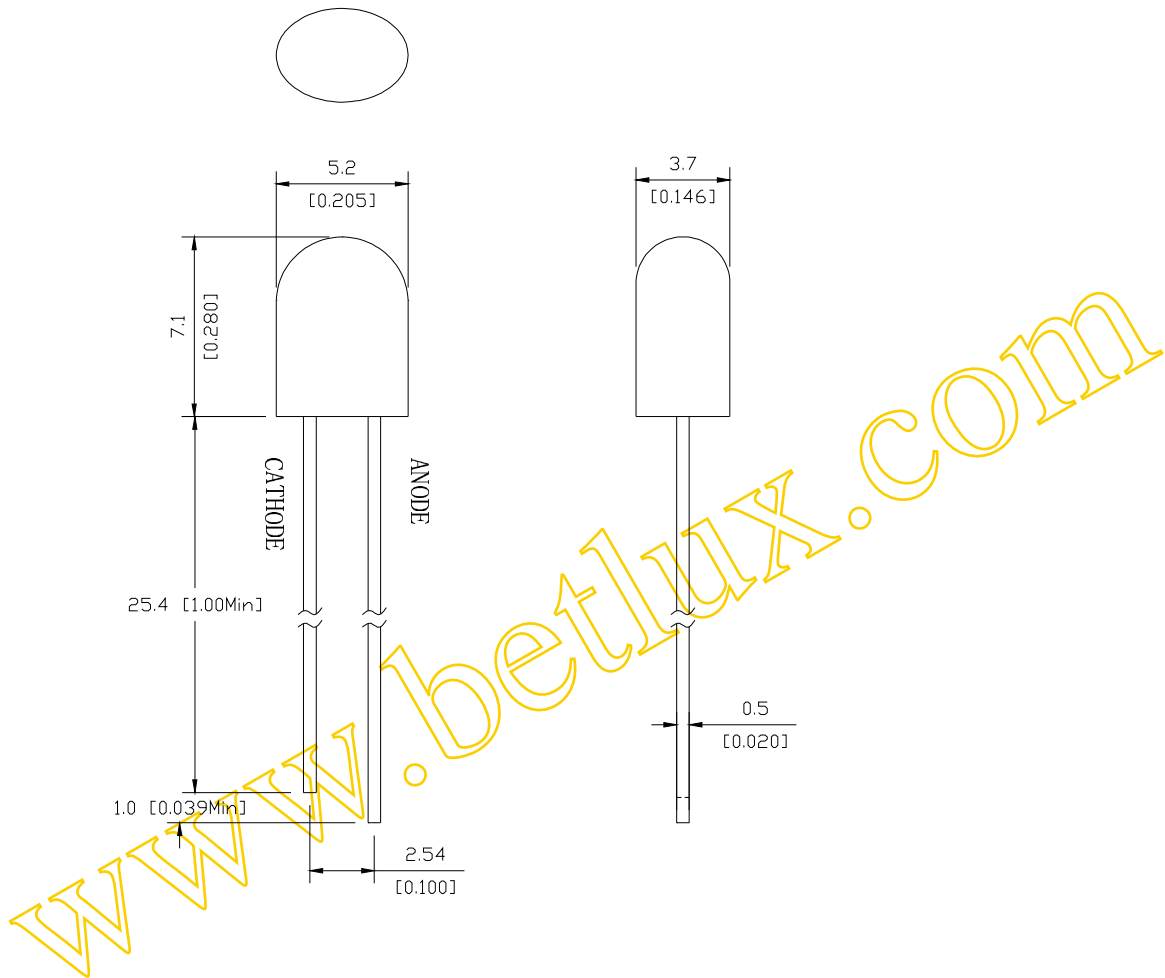


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


Ovel Type LED lamp

BL-L557


Typical electrical-optical characteristics curves:

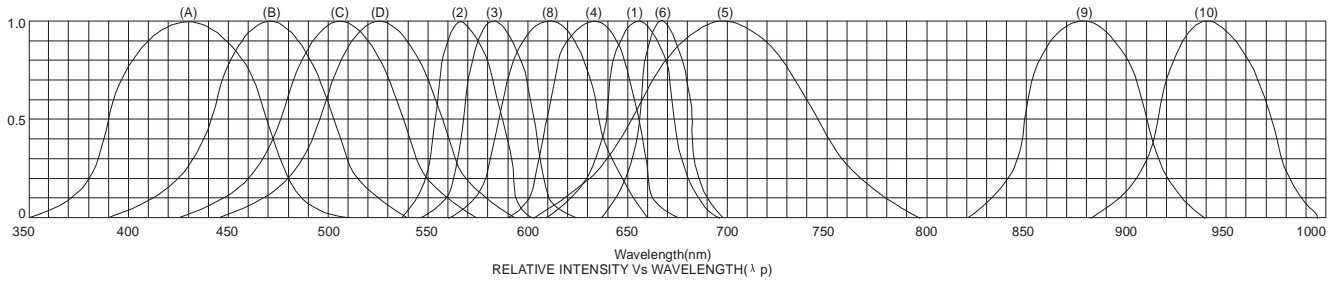


- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaN/SiC 525nm/Ultra Green

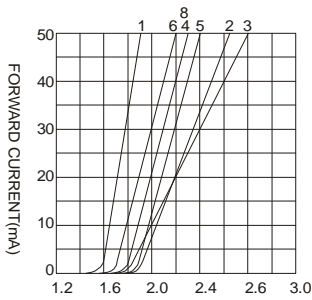


FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

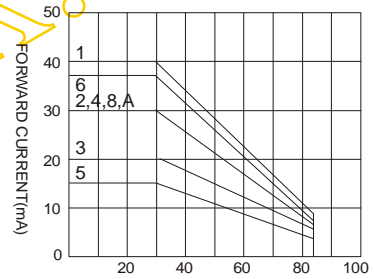

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

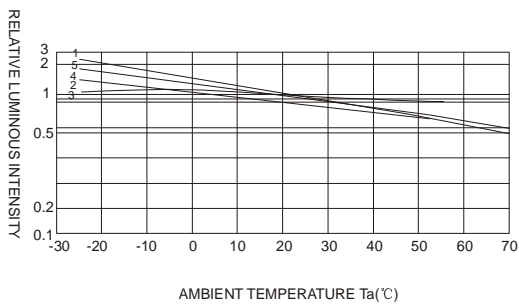

AMBIENT TEMPERATURE Ta(°C)

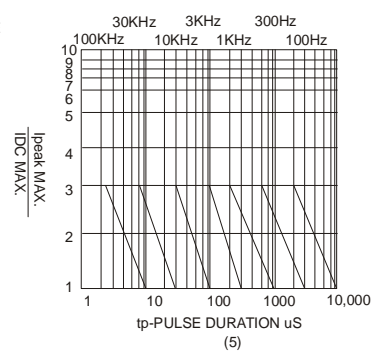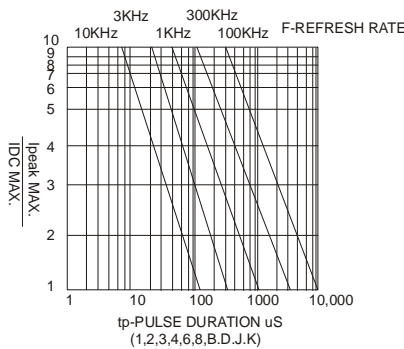

NOTE:25°C free air temperature unless otherwise specified