

FEATURES AND SPECIFICATIONS



Application Tooling Manual PDDLH

19286-0065

Putt Pump DielessHead Crimper for Insulated and Non-Insulated Terminals and Splices

Features and Benefits

- Crimps a wide range of products and does not require die set changes, which reduces the overall cost and provides production flexibility
- Swivel base and terminal locator included to provide the operator with a user-friendly tool to increase productivity
- Complete lightweight system that allows tool to be moved and stored easily


Specifications

Pneumatic: Supply Pressure –100 PSI
Air Pressure –125 PSI max.
Cycle Time: 15 secon

ORDERING INFORMATION

Order No.	Wire Gauge (AWG)	Operating Pressure*
19286-0065	8	40 PSI
19286-0065	6	45 PSI
19286-0065	4	50 PSI
19286-0065	2	55 PSI
19286-0065	1	65 PSI
19286-0065	1/0	65 PSI
19286-0065	2/0	70 PSI
19286-0065	3/0	75 PSI
19286-0065	4/0	75 PSI
19286-0065	250MCM	85 PSI
19286-0065	300MCM	90 PSI
19286-0065	350MCM	90 PSI
19286-0065	400MCM	100 PSI
19286-0065	500MCM	100 PSI

* The pressure settings shown in the chart refer to the SPX power team pump that is currently shipped with the PDDLH tool. Please review the instructions sent with your specific tool.

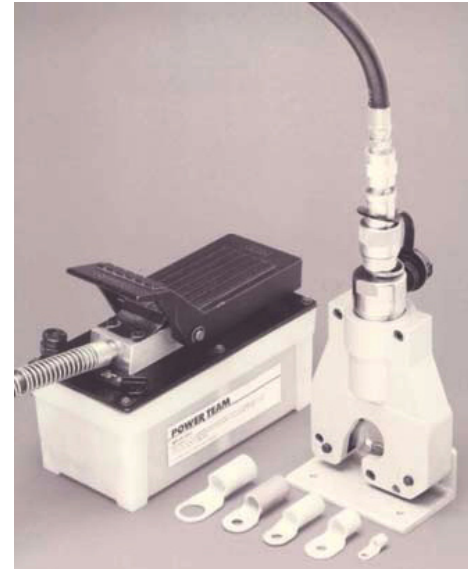

Bringing People & Technology Together, WorldwideSM

Americas Headquarters
Lisle, Illinois 60532 U.S.A.
1-800-78MOLEX
amerinfo@molex.com

Far East North Headquarters
Yamato, Kanagawa, Japan
81-462-65-2324
feninfo@molex.com

Far East South Headquarters
Jurong, Singapore
65-6-268-6868
fesinfo@molex.com

Visit our website at www.molex.com

European Headquarters
Munich, Germany
49-89-413092-0
eurinfo@molex.com

Corporate Headquarters
2222 Wellington Ct.
Lisle, IL 60532 U.S.A.
630-969-4550
Fax: 630-969-1352