



PROPOSED PAD ARRANGEMENT:

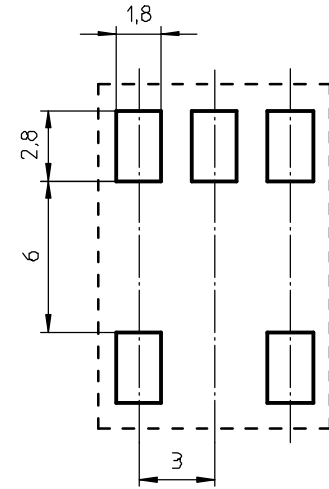

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0. 

Pin material: CuSn - Ni flash. Sn plated.

Max operating temp.: acc. to IEC 85 class F, 155°C.

Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.

Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 4,56 mm².

Mean length of turn: 17,9 mm.

CLASSNO.		CSHS-EP7-1S-5P-Z		4322 021 06351		1 03-06-03	
NAME	M.Veekens	SUPERS	001	SP	112 - 001	069	A3
MPA	CHECK	DATE	2003-06-03	Property of		© FERROXCUBE 2000	
	CONTR.			Eigendom van			