


General data 4-pins P14/8 coil former for PCB mounting

PARAMETER	SPECIFICATION
Coil former material	polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41938(M)
Maximum operating temperature	130 C, "IEC 60085", class B
Pin material	copper-zinc alloy (CuZn), tin (Sn) plated
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 C, 2 s

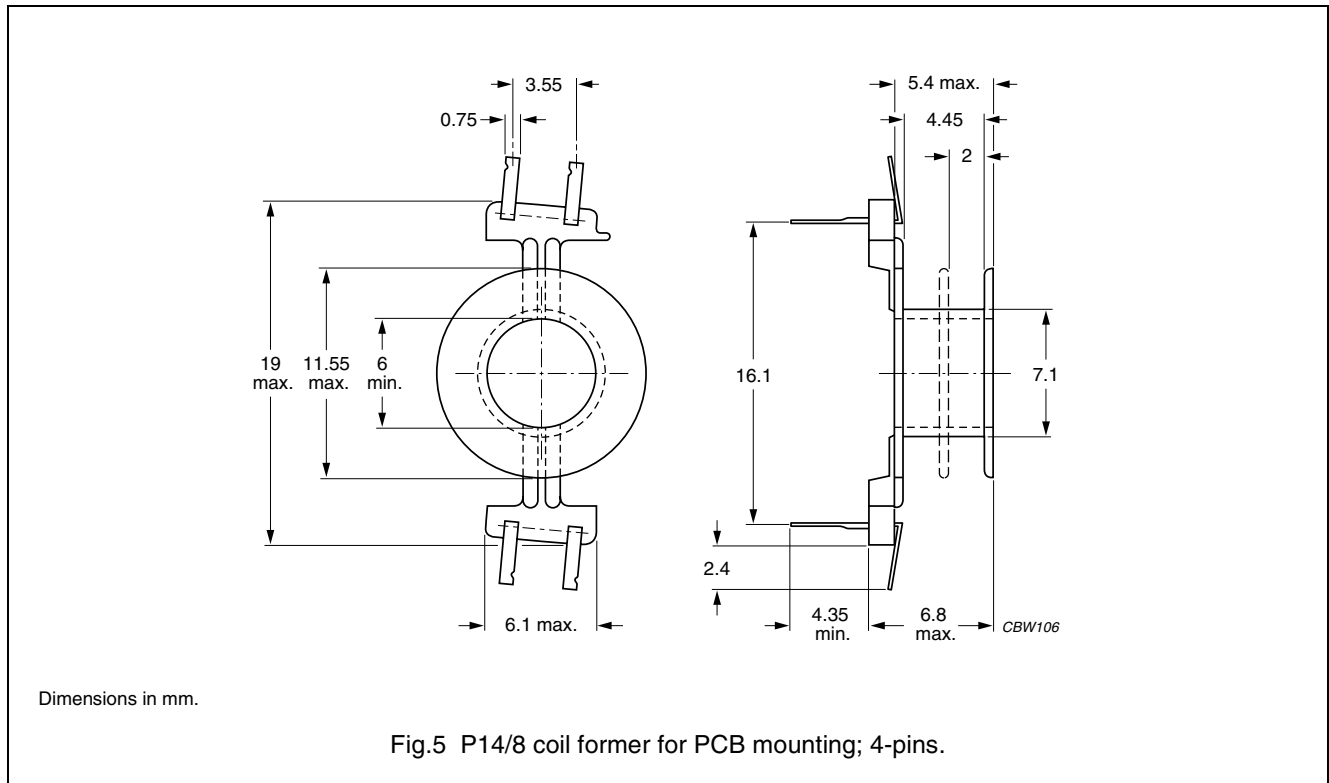

Data for 4-pins P14/8 coil former for PCB mounting

NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm ²)	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	LENGTH OF PINS (mm)	TYPE NUMBER
1	8.65	4.4	29.0	4.4	CPV-P14/8-1S-4SPD-Z
1	8.65	4.4	29.0	6.8	CPV-P14/8-1S-4SPDL-Z
2	2 3.87	2 2.0	29.0	4.4	CPV-P14/8-2S-4SPD-Z
2	2 3.87	2 2.0	29.0	6.8	CPV-P14/8-2S-4SPDL-Z