

# SPDT RF SWITCH

## MODEL TWP2204

Package: 6 Lead Flatpack (FP12)  
Also Available In: Connectorized Housings

### Features

- DC - 3.0 GHz
- RF1, RF2 Terminated in "OFF" Position
- Fast Switching Speed: 10 ns Typical
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

### Maximum Ratings


Ambient Operating Temperature ..... -55°C to +100 °C  
Storage Temperature ..... -65°C to +125 °C  
Case Temperature ..... +125 °C  
DC Voltage ..... -8.5 Volts  
Continuous RF Input Power ..... +30 dBm

### Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C	
Frequency	DC - 3.0 GHz	DC - 3.0 GHz	
Insertion Loss (dB)	1.0	1.5 Max.	
Isolation (dB)	>40	30 Min.	
VSWR	In Out	<1.5:1 <1.75:1	2.0:1Max. 2.0:1 Max.
Control Input High	Vdc mA	-5.0 to -8.0 0.30	-8.0 Max. 1.00 Max.
Control Input Low	Vdc mA	0 to -0.2 0.010	0 Max. 0.030 Max.
Switching Speed (ns)	10	15 Max.	

Note: Care should always be taken to effectively ground the case of each unit.


### Pin Layout

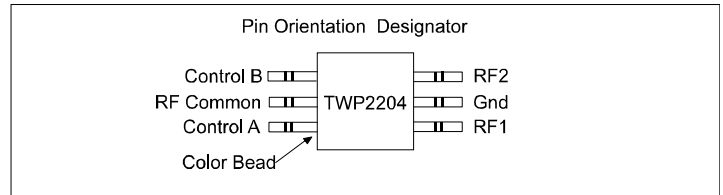

### Truth Table

Control Input		Switch Position	
A	B	RF1	RF2
High	Low	ON	OFF
Low	High	OFF	ON

### Typical Performance Data

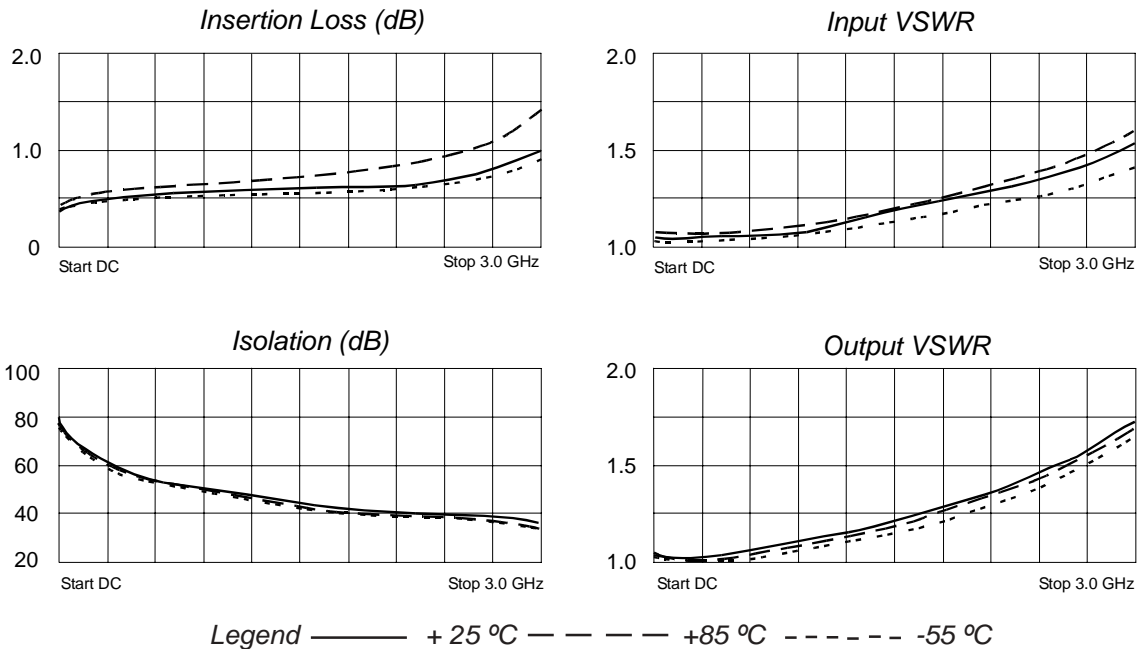

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/28/08

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001