




6 AMPERE AXIAL LEAD RECTIFIERS

- LOW COST
- PRV TO 1,000 VOLTS
- HIGH SURGE CAPABILITY
- AVALANCHE CHARACTERISTICS

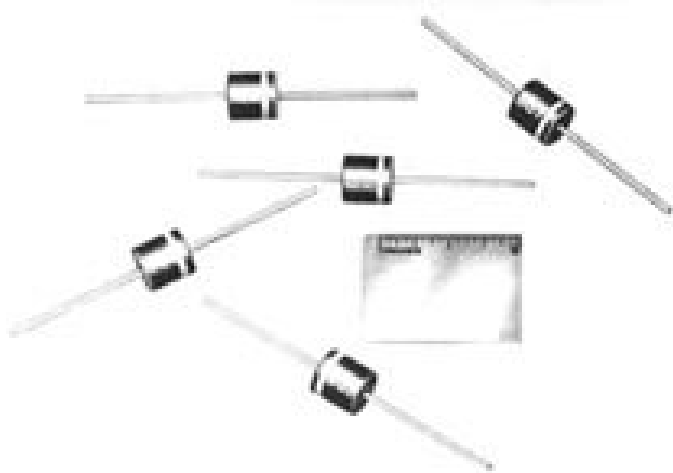

PRV	50V	100V	200V	400V	600V	800V	1000V
TYPE NO.	YAB005	YAB010	YAB020	YAB040	YAB060	YAB080	YAB100

ELECTRICAL CHARACTERISTICS at T _A =25°C Unless Otherwise Specified	YAB SERIES
Max. DC Reverse Current @ PRV and 25 °C, I _R	10 μA
Max. DC Reverse Current @ PRV and 100°C, I _R	250 μA
Max. Forward Voltage Drop @ 6.0Amps, V _F	1.2Volts
Ambient Operating Temperature Range, T _A	-55 °C to +150°C
Storage Temperature Range, T _{STG}	-55 °C to +150°C
Max. One-half Cycle Surge Current, I _{FM} (Surge) @ 60Hz	400 Amps

EDI reserves the right to change these specifications at any time without notice.

FIG.1
OUTPUT CURRENT vs AMBIENT TEMPERATURE

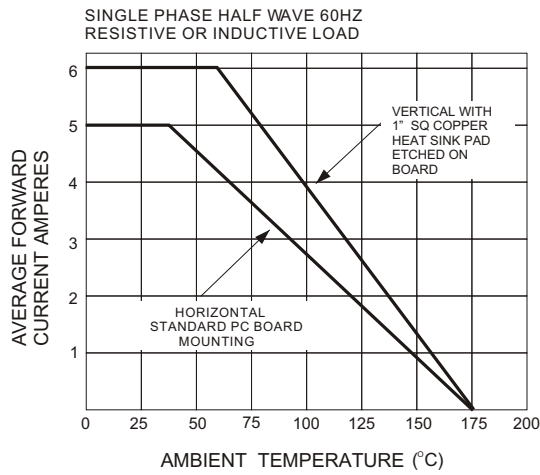


FIG.2
OUTPUT CURRENT vs LEAD TEMPERATURE

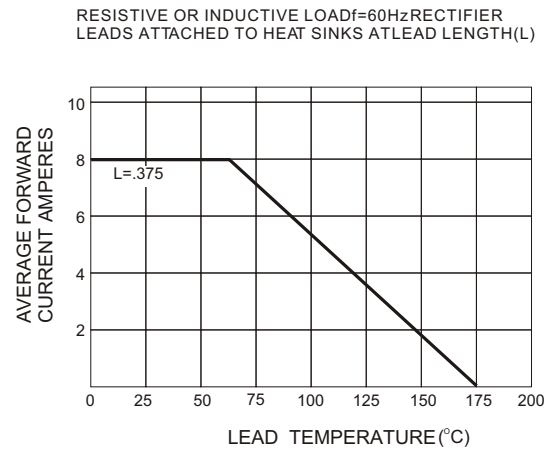


FIG.3
NON-REPETITIVE SURGE CURRENT


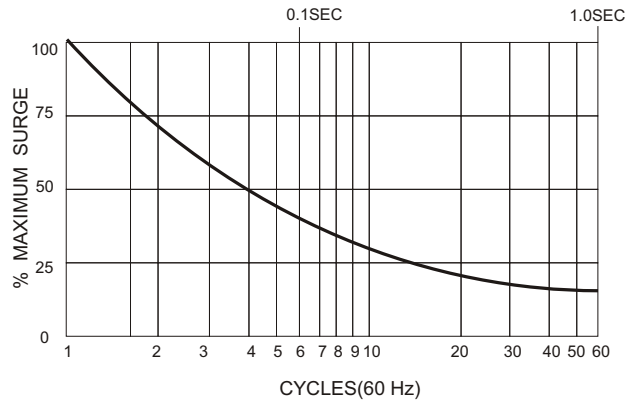


FIG.4
DIMENSIONS

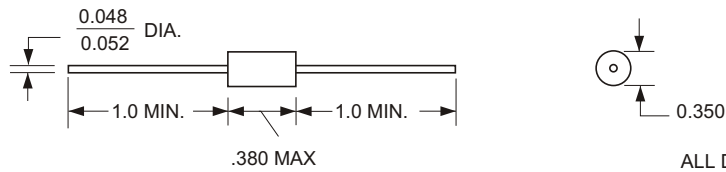

ALL DIMENSIONS IN INCHES

Maximum lead and terminal temperature for soldering, 3/8 inch form case, 5 seconds at 250 °C