

RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free

## FEATURES


- Extremely Low Thermal Resistance
- For Surface Mount Application
- Higher Temp Soldering : 260 °C for 10 Seconds At Terminals
- Low Forward Voltage

## MECHANICAL DATA

Case: Molded plastic  
Epoxy: UL 94V-0 rate flame retardant  
Lead: Solderable per MIL-STD-202, method 208 guaranteed  
Polarity: Color band denotes cathode end  
Mounting position: Any  
Marking Code: SL



SOD-323(SC-76)

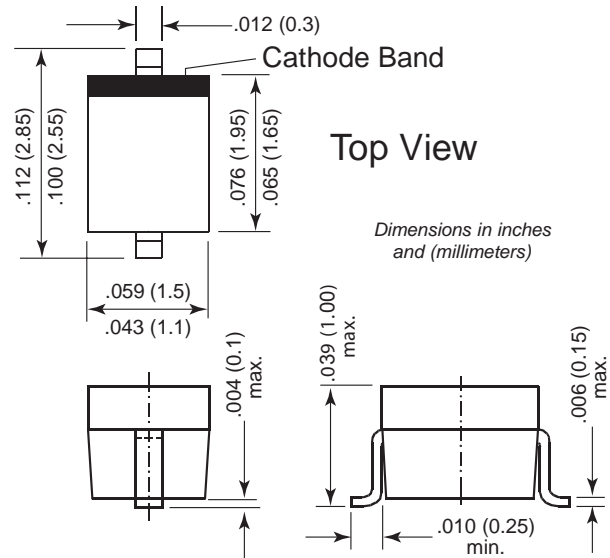

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

TYPE NUMBER	SCS157V	UNITS
Maximum Recurrent Peak Reverse Voltage	40	V
Working Peak Reverse Voltage	40	V
Maximum DC Blocking Voltage	40	V
Average Forward Current ( $I_{F(AV)}$ ) @ $T_J = 90^\circ\text{C}$	0.35	A
Peak Forward Current ( $I_{FSM}$ ) @ 8.3ms half sine	5	A
Maximum Instantaneous Forward Voltage ( $V_F$ @ $I_{FM} = 350\text{mA}$ , $T_A = 25^\circ\text{C}$ )	0.35	V
Maximum Instantaneous Forward Voltage ( $V_F$ @ $I_{FM} = 1.0\text{A}$ , $T_A = 25^\circ\text{C}$ )	0.55	V
Maximum DC Reverse Current At Rated DC Blocking Voltage ( $I_R$ @ $T_J = 25^\circ\text{C}$ )	1.0	mA
Typical Junction Capacitance ( $C_J$ )	120	pF
Operating Temperature Range $T_J$	-50 ~ +150	°C
Storage Temperature Range TSTG	-65 ~ +175	°C

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.

**RATING AND CHARACTERISTIC CURVES**

FIG.1 TYPICAL FORWARD CHARACTERISTICS

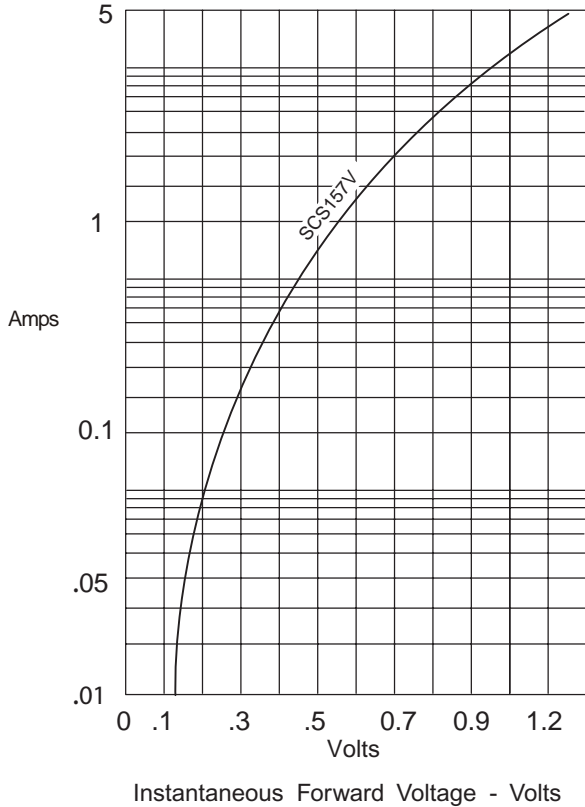


FIG.2-JUNCTION CAPACITANCE

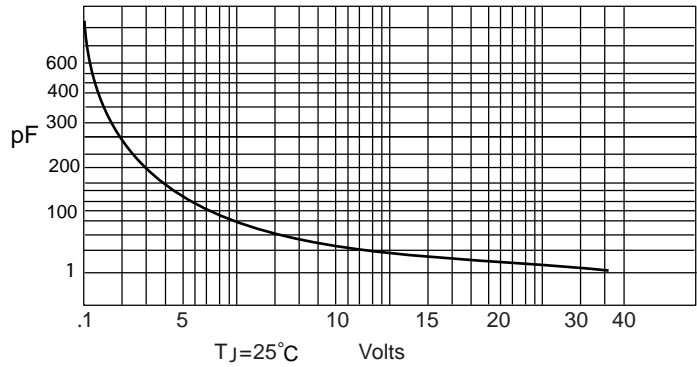


FIG.3-FORWARD DERATING CURVE

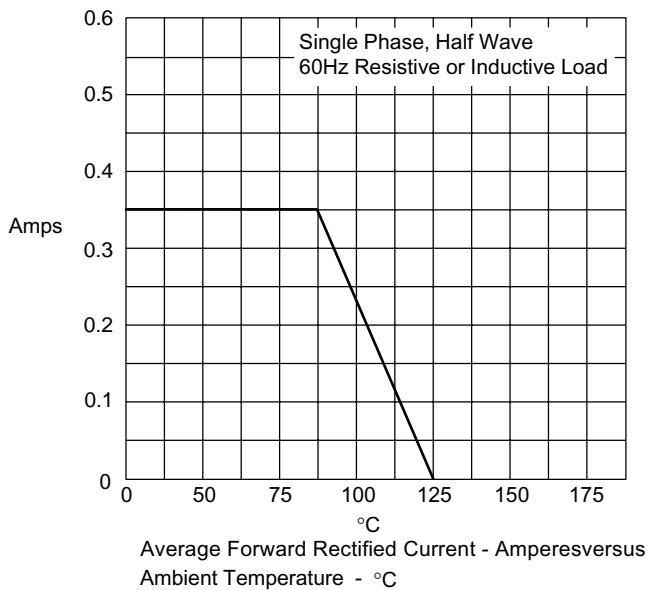


FIG.4-PEAK FORWAED SURGE CURRENT

