



### 1. CONFIGURATION & DIMENSIONS :

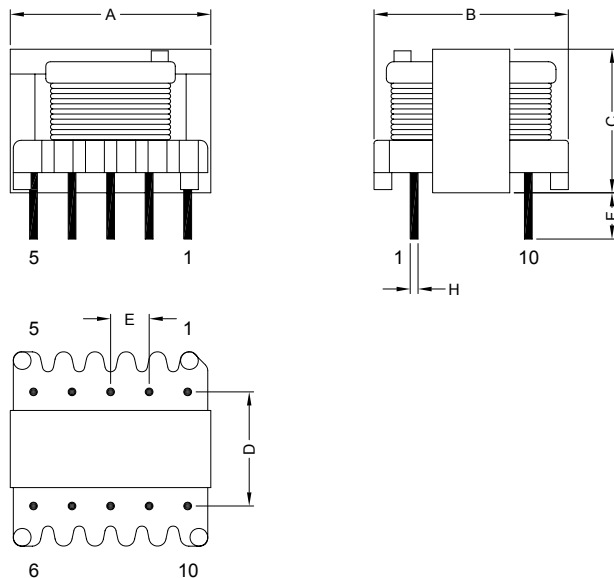

Unit:m/m

A	B	C	D	E	F	H
13.00±1.00	12.50±0.50	9.50±1.00	7.50±0.50	2.50±0.50	3.60±1.00	Ø0.60±0.05

### 2. SCHEMATIC :

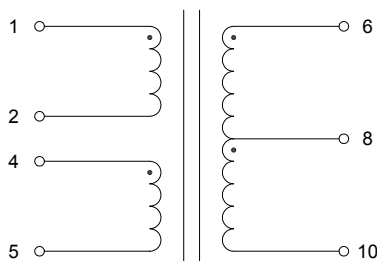

### 3. SCHEMATIC :

- Bobbin : Phenolic
- Core : EI12.5
- Wire : Polyurethane (UEW)
- Tape : Polyester Film
- Varnish : Synthite AC-43



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**

#### 4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

#### 5. ELECTRICAL CHARACTERISTICS :

Part No.	Impedance ( Z )	Conditions	Test Frequency	DCR @ 25°C
SEIB2VTF-50724	Z : (1-5) tie: 2.4 = 10KΩ±10%	Load 6-10 = 10KΩ	1KHz 1V	(1-5)tie: 2.4 = 700Ω±10%
	Z : (6-10) tie: 2.4 = 10KΩ±10%	Load 1-5 = 10KΩ	1KHz 1V	(6-10) = 650Ω±10%



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**