

ZTA Series MHz-Band Ceramic Resonator

ZTA series MHz-Band ceramic resonators are widely used in telecommunication, cable, radar, TV set, tape recorder, video camera and other electronic products due to its lower price and stable performances.

- High stability of resonant frequency
- Comprises fixed, tuned, solid-state devices
- Miniature and light weight, simple construction
- Excellent shock resistance performance
- Non-adjustment of oscillator is possible



Specifications:

Frequency Range:

ZTA_MG Series:	2.00MHz ~ 6.50MHz
ZTA_MT Series:	6.00MHz ~ 13.00MHz
ZTA_MX Series:	12.10MHz ~ 50.00MHz

Operating Temperature: -20°C ~ +80°C Standard

Storage Temperature: -40°C ~ +85°C

Frequency Tolerance(at 25°C): ± 0.5%

Frequency Stability(over temp. range): ± 0.5%

Aging for 10 Years: ± 0.3%


Resonant Resistance: Maximum resistance corresponds to frequency. Please see RR table.

Withstanding Voltage: 100VDC

Insulation Resistance: 500MΩ min at 10VDC


Optional Features: Tape & Reel - A

ZTA Series

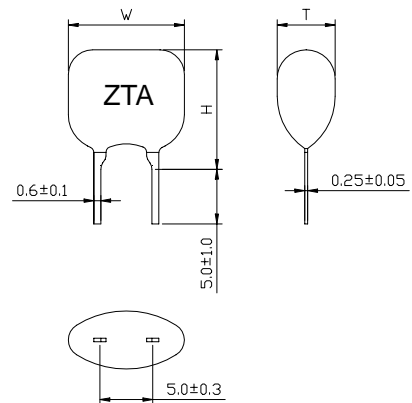

P/N	Frequency(MHz)	W	H	T
ZTA_MG	2.00 ~ 3.00	12.0	8.0	4.0
ZTA_MG	3.01 ~ 6.50	10.0	7.0	4.0
ZTA_MT	6.00 ~ 13.00	8.0	8.0	4.0
ZTA_MX	12.10 ~ 50.00	9.0	8.0	4.0

TEST CIRCUIT



All dimensions are in mm

Note:

1. Other frequencies, tolerances, stabilities, and operating temperature ranges available. Consult VTC Support for specific requirements.
2. Not all combinations of the above tolerances, stabilities, and temperature ranges are available. Consult VTC Support if your requirement is not standard.
3. All specifications subject to change without notice.

Ordering Information

Product name + Frequency + Other Specification Code.

i.e. ZTA4.00MG or ZTA20.00MX-A (in tape and reel).