



750-110, 750-111, 750-112 and 750-113 Connector to Adapter Pre-Terminated Assemblies Series 72 & 74 Tubing & Series 75 Conduit


CONNECTOR-TO-ADAPTER APPLICATIONS CONNECTOR DESIGNATORS (A-B-D-E-F-G-H-J-K-L-S)

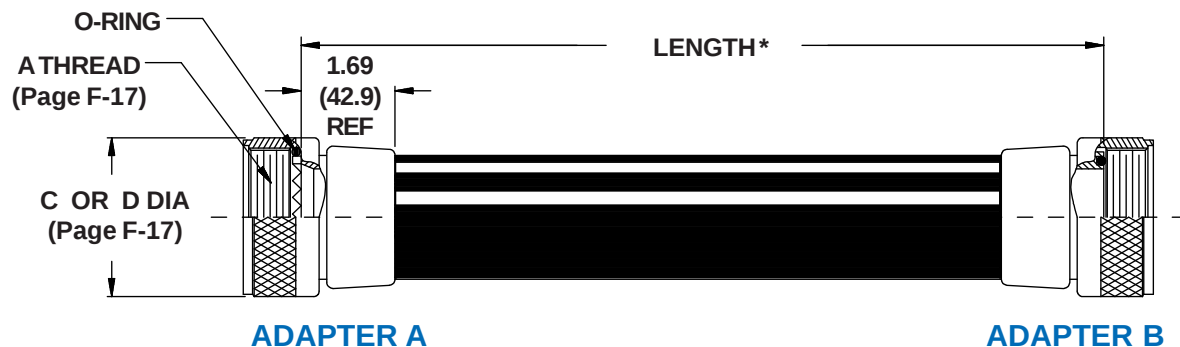

**750-110, 750-111, 750-112 and 750-113
Connector to Adapter Pre-Terminated Assemblies
Series 72 & 74 Tubing & Series 75 Conduit**

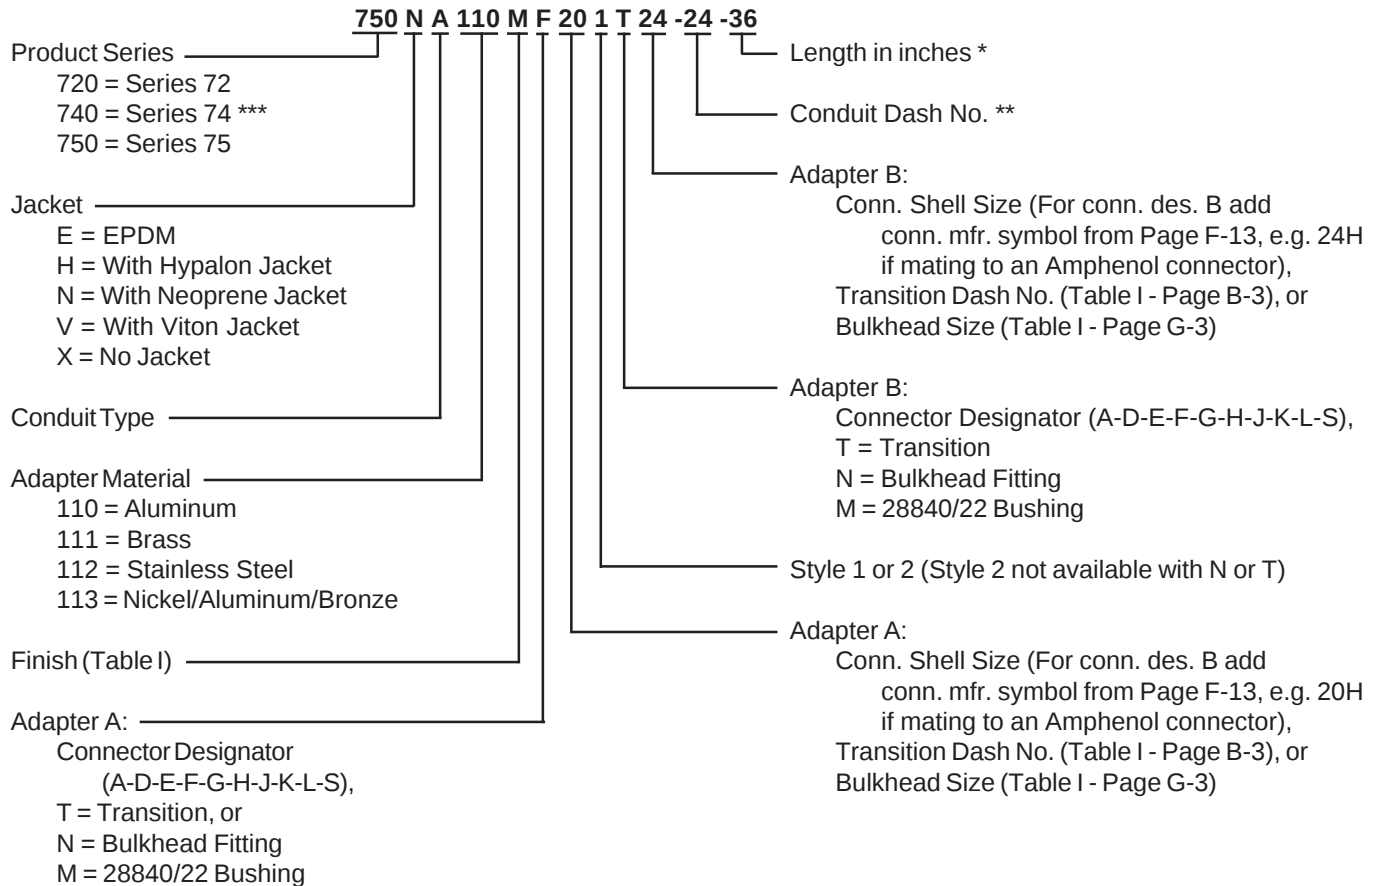


Pre-Terminated
Assemblies



**Designator T
Transition Fitting**



**Designator M
M28840/22 Bushing**

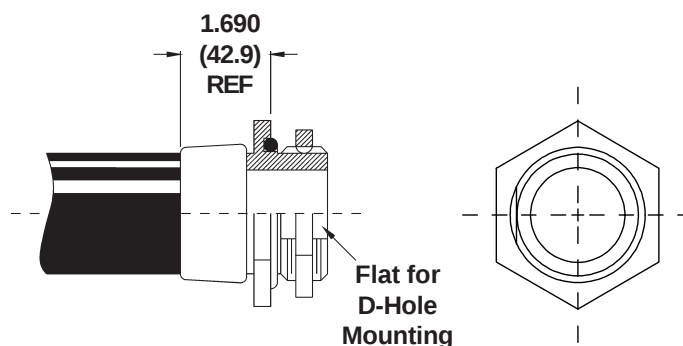

Designator N Bulkhead Fitting

TABLE I

SYMBOL	FINISH
B	Olive Drab over Cadmium Plate
J	Gold Iridite over Cadmium Plate over Nickel
M	Electroless Nickel
N	Olive Drab over Cadmium Plate over Nickel
NC	Zinc-Cobalt, Olive Drab
NF	Olive Drab over Cadmium Plate over Electroless Nickel (500 Hour Salt Spray)
T	Bright Dip Cadmium Plate over Nickel
Z1	Passivate

NOTES:

1. Metric dimensions (mm) are indicated in parentheses.
 2. O-Ring not supplied with connector designator A.
- * Length tolerance is $\pm .250$ (12.7) for lengths up to 24 inches (619.6 mm). Length tolerance for longer lengths is $\pm$ one percent (1%) of the length.
- ** Consult factory for fittings using 3.000" (76.2) conduit.
- *** Pre-terminated assemblies using product Series 74 will be supplied with FEP material, standard wall thickness, standard convolutions, tin copper braid, and neoprene jacket. For other options consult factory.