



**FERROXCUBE**



e

f

1

2

3


4

5



6

7

8

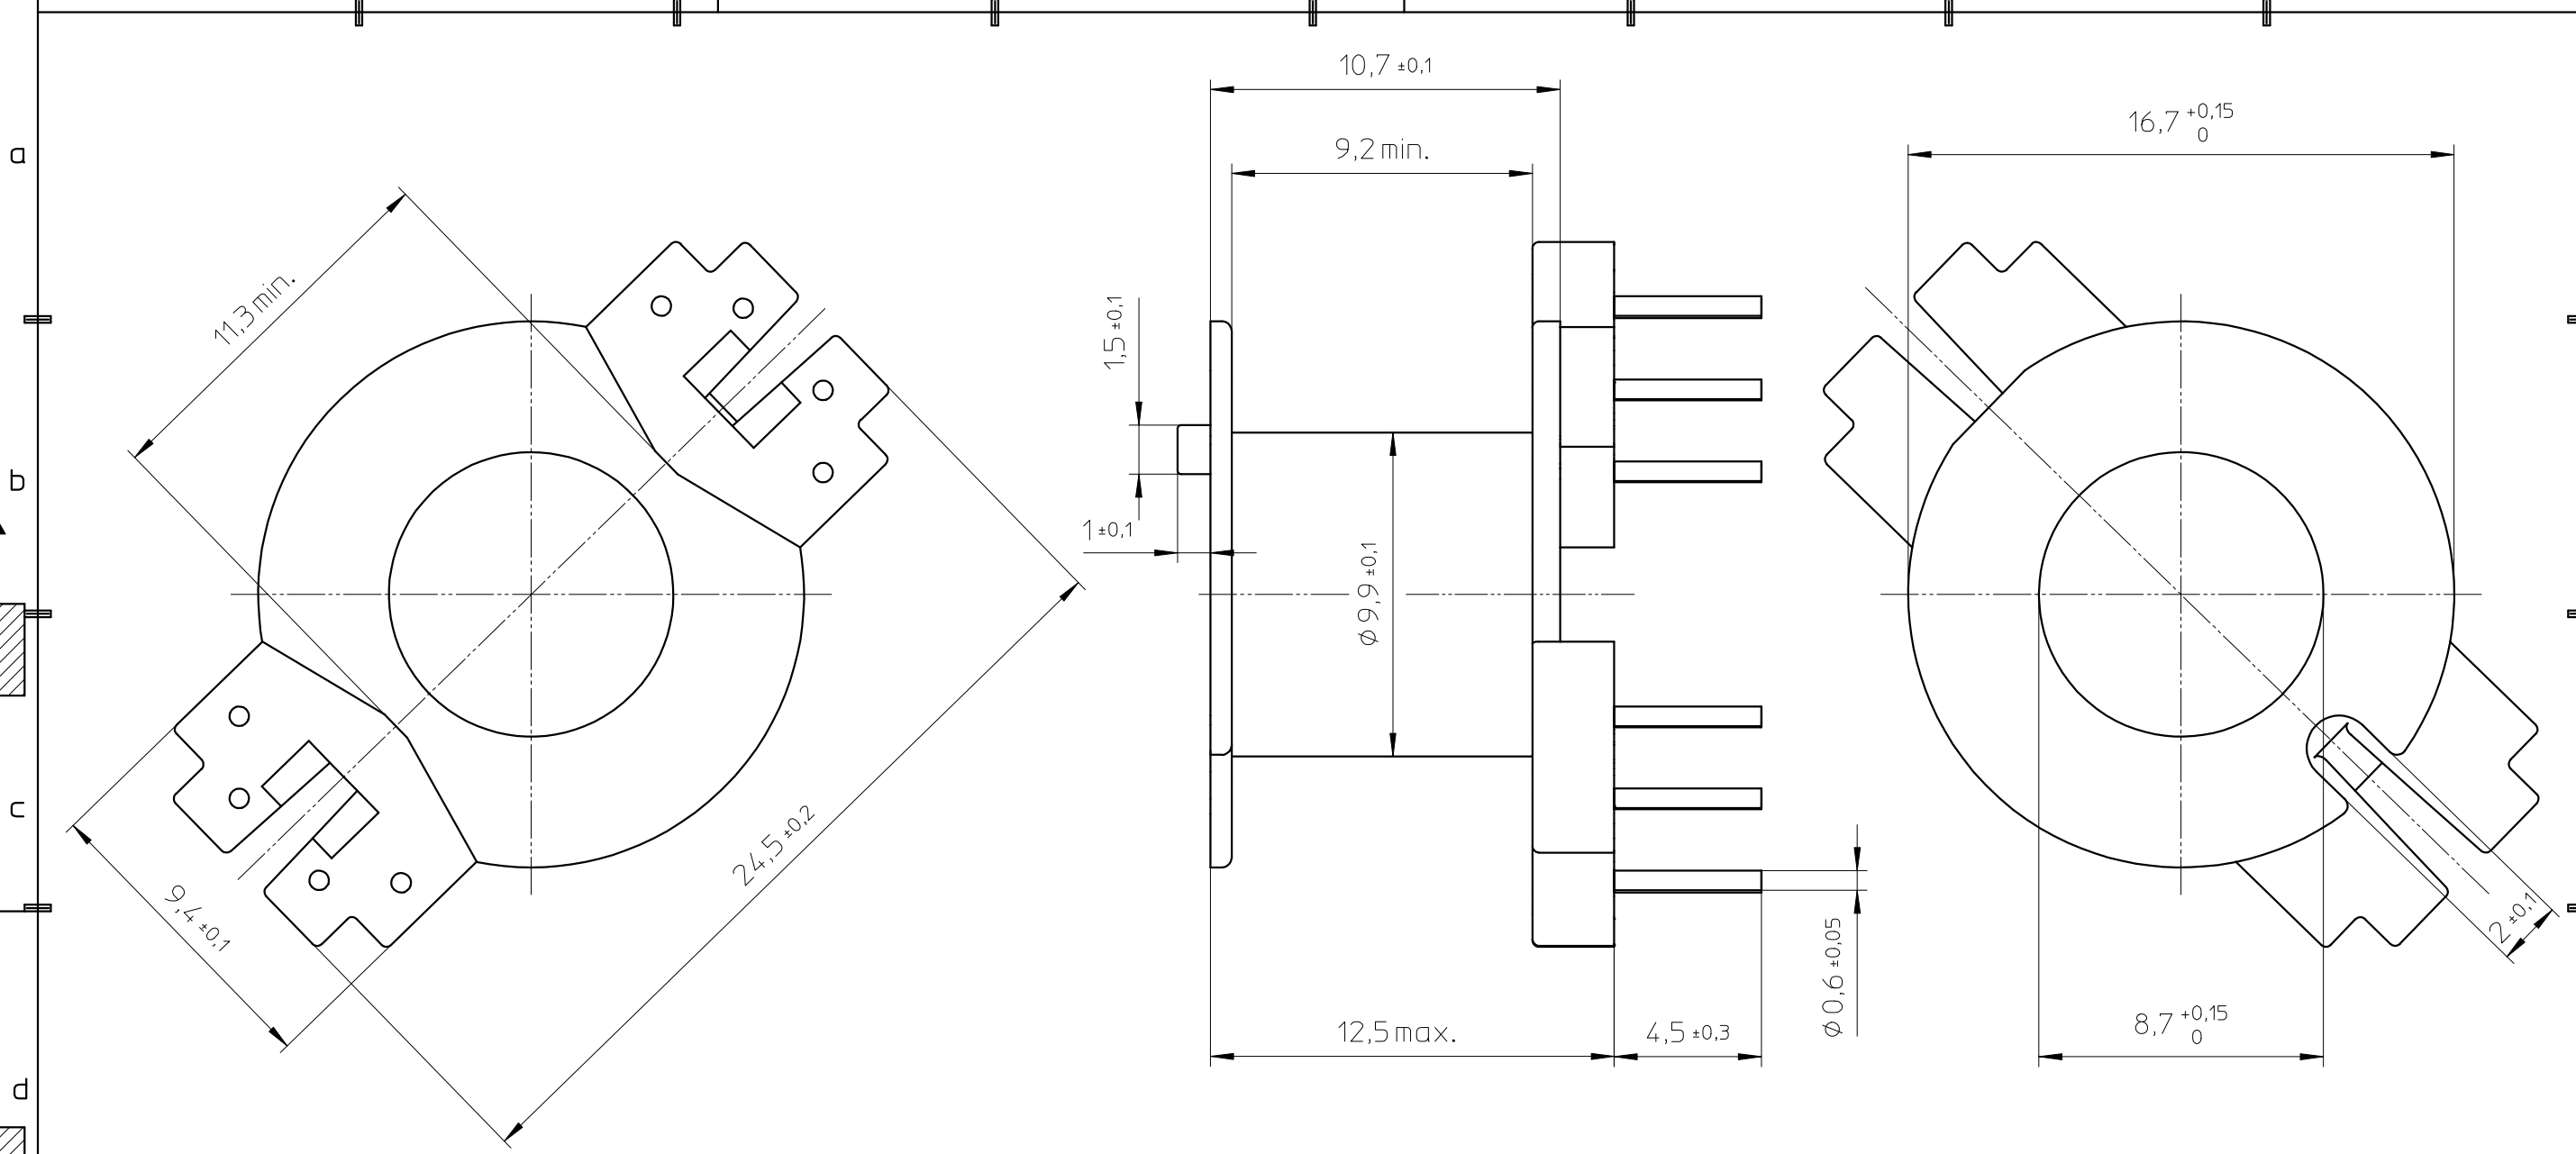

HOLE PATTERN:

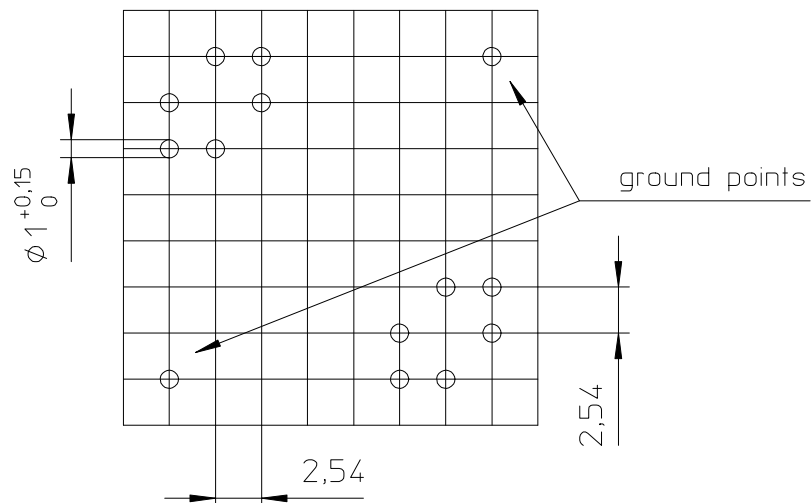

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429(M) - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 150°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.  
 Min. winding area: 31 mm<sup>2</sup>.  
 Mean length of turn: 42 mm.

|           |  |                  |  |                |  |                   |  |             |  |            |  |
|-----------|--|------------------|--|----------------|--|-------------------|--|-------------|--|------------|--|
| CLASS.NO. |  | NAME             |  | SUPER.         |  | SH                |  | SH          |  | 1998-02-19 |  |
|           |  | NAAM             |  | VERV.          |  | BL                |  | BL          |  | 1998-07-13 |  |
|           |  | MPA              |  | CHECK          |  | DAT.              |  | Property of |  | 2000-03-08 |  |
|           |  | CONTR.           |  | 98-02-19       |  | © FERROXCUBE 2000 |  |             |  |            |  |
|           |  | J. Tjon          |  | 001            |  | 112 - 001         |  | 069         |  | A3         |  |
|           |  | CSV-RM8-1S-8P-TA |  | 4322 021 02651 |  |                   |  |             |  |            |  |