

SPECIFICATIONS

Modular Jack

Mechanical

Mating Force: 4Pounds max.(RJ45) 7.88Pounds max.(USB)
Unmating Force: 10Pounds max.(RJ45) 2.25Pounds min.(USB)
Durability: 1000 Cycles(RJ45) 1500 Cycles(USB)

JFM Series


RJ45 Over Dual USB
R/A, T/H Type
2.03mm [.080"] Pitch
10/100 Base-T

Electrical


Current Rating: 0.5A max.(RJ45) 1A(USB)
Dielectric Withstanding Voltage: 1500V(RJ45) 500V(USB)
Insertion Loss: -1.0dB max @1-100MHz
Return Loss: -10dB min. @1-80MHz
Cross Talk: -35dB min @1-100MHz

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper Alloy
Shell: Copper Alloy
Operating Temperature: 0 to +70

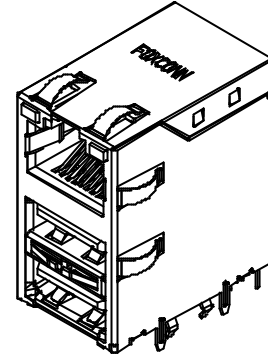


DRAWING

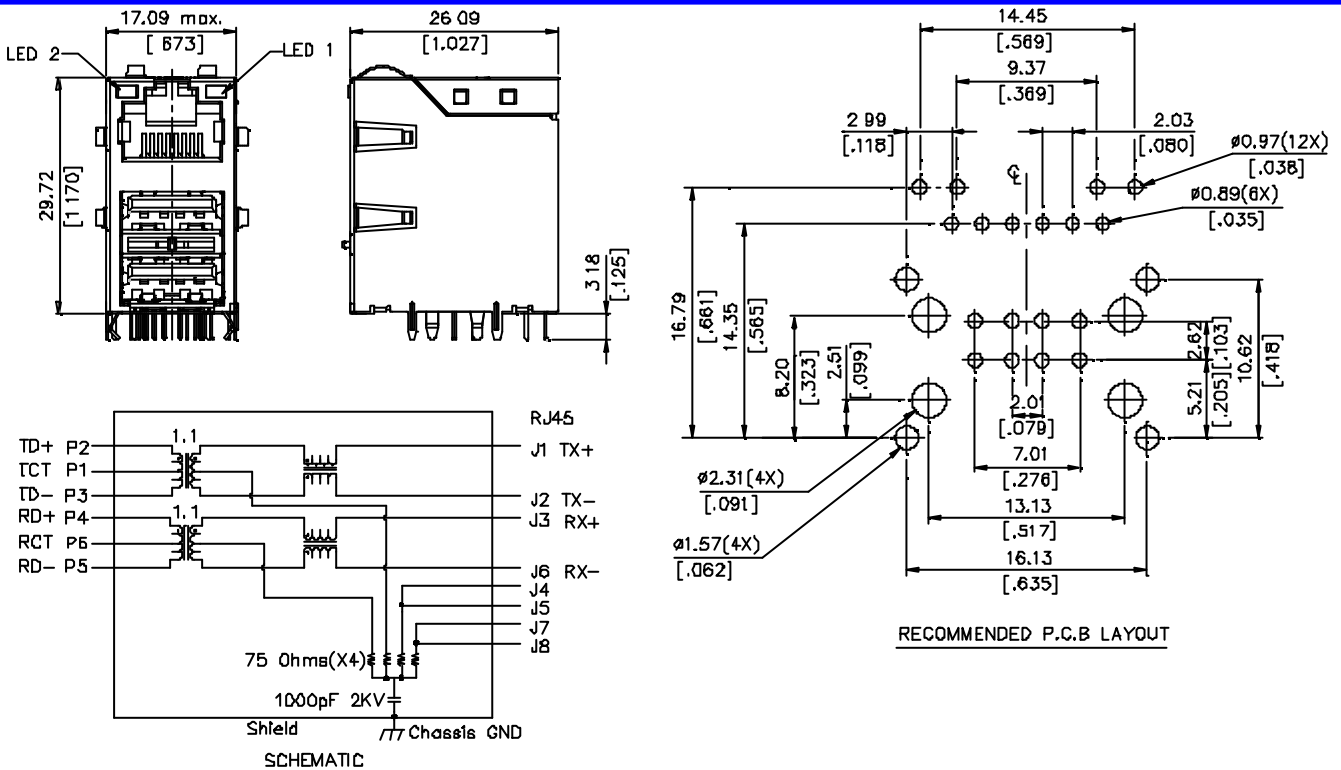

ORDERING INFORMATION

PRODUCT NO.: **JFM 2 4 U 1 B - 0101 W**

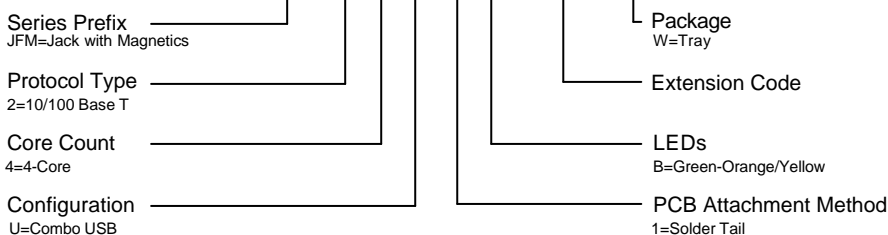

JFM24U1B-01D1W	Yellow	Green-Orange
P/N	LED 1	LED 2