



HIGH VOLTAGE SILICON RECTIFIER

**GP05-10
THRU
GP05-20**


FEATURES

- AVALANCHE OPERATION
- UL 94V0 FLAME RETARDANT EPOXY MOLDING COMPOND
- BEVELED ROUND CHIP
- LOW COST

MECHANICAL DATA

- CASE : TRANSFER MOLDED
- LEADS : SOLDERABLE PER MIL-STD-202,METHOD 208
- POLARITY : CATHODE INDICATED BY COLOR BAND
- WEIGHT : 0.34 GRAMS (DO-41)

CASE-DO41

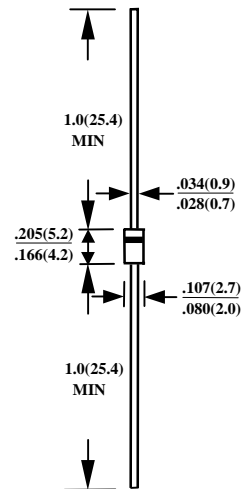

DIMENSIONS IN INCHES AND (MILLIMETERS)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED
SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD.
FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	GP05-10	GP05-15	GP05-18	GP05-20	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	1000	1500	1800	2000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	700	1050	1260	1400	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	1000	1500	1800	2000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT .375" (9.5mm) LEAD LENGTH AT TA=55°C	I_O	0.5				A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	30				A
TYPICAL JUNCTION CAPACITANCE MEASURED AT 1MHZ AND APPLIED REVERSE VOLTAGE AT 4.0 VOLTAS(NOTE1)	C_J	9				PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	50				°C/W
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 150				°C
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 150				°C

ELECTRICAL CHARACTERISTICS (AT TA =25°C UNLESS OTHERWISE NOTED)


CHARACTERISTICS	SYMBOL	GP05-10	GP05-15	GP05-18	GP05-20	UNITS
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	2.0				V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5.0				μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50.0				μA

NOTE :


1. MEASURED AT 1MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEATSINK 20x 20x 1t(mm) COPPER PLATE AT LEAD LENTH 5mm

RATINGS AND CHARACTERISTICS CURVES GP05-10 THRU GP05-20


**FIG. 1-MAXIMUM CURRENT RATING
EFFECT OF COPPER AREA.
RESISTIVE/INDUCTIVE LOAD**

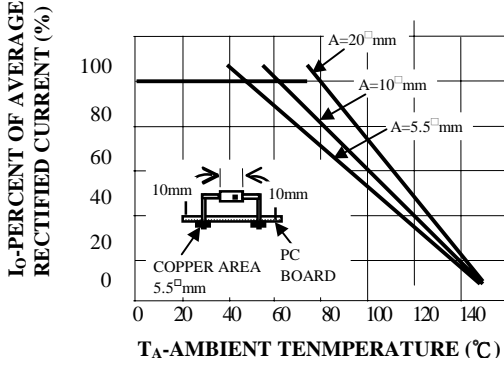


**FIG. 2-MAXIMUM CURRENT RATING
CAPACITIVE LOAD,
10mm LEAD LENGTHS**

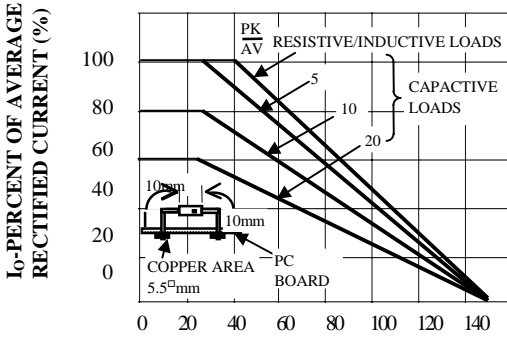

**FIG. 3-MAXIMUM CURRENT RATING
EFFECT OF COPPER AREA.
RESISTIVE/INDUCTIVE LOAD**

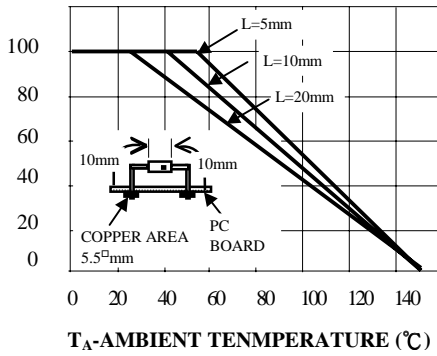

**FIG. 4-TYPICAL REVERSE CHARACTERISTICS
AT Tj=25°C**

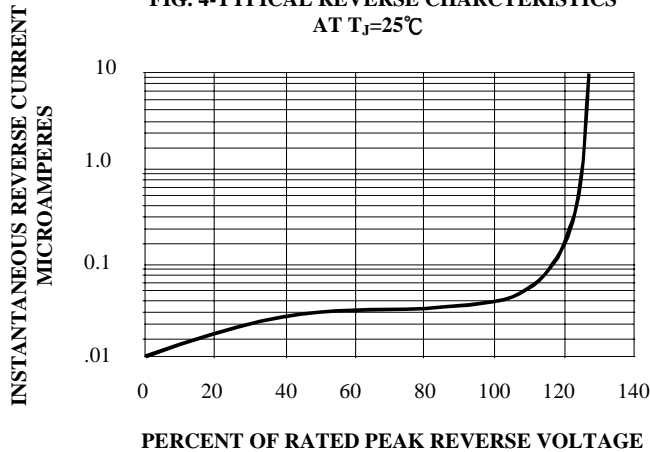

**FIG. 5-MAXIMUM FORWARD SURGE
VS NUMBER OF CYCLES**


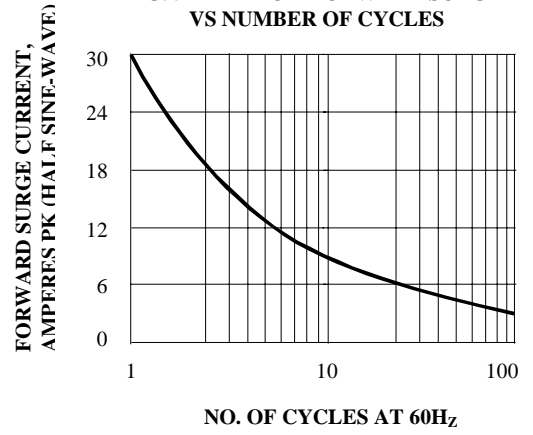


FIG. 6-TYPICAL JUNCTION CAPACITANCE



**FIG. 7 TYPICAL FORWARD
CHARACTERISTICS**

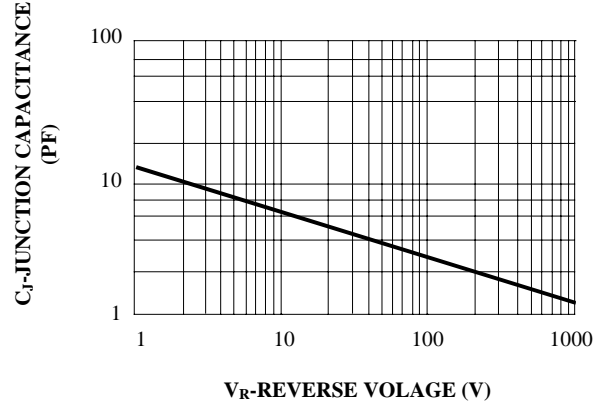