

Surface Mount Switching Diodes

 Lead(Pb)-Free


Features:

- * Four types of packaging are available
- * Suitable for high packing density layout
- * High reliability.

Mechanical Data:

- * Terminals: Solderable per MIL-STD-202, Method 208
- * Polarity: See Diagrams Page.2
- * Marking: See Diagrams Page.2
- * Weight: 0.002 grams (approx)


SWITCHING DIODES
100 mAMPERES
20 VOLTS



SOT-523(SC-75)

SOT-523 Outline Dimensions

Unit:mm

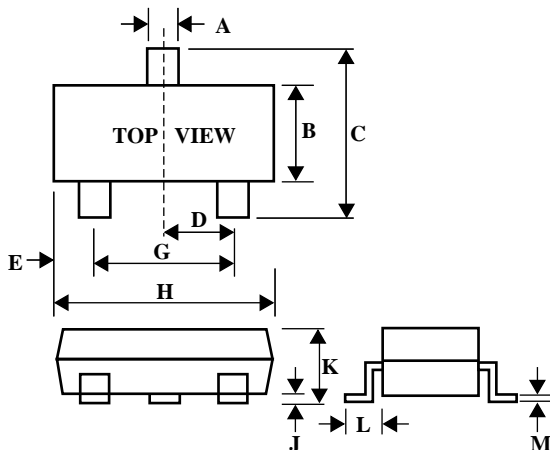

SOT-523		
Dim	Min	Max
A	0.30	0.50
B	0.70	0.90
C	1.45	1.75
D	-	0.50
E	0.15	0.40
G	0.80	1.00
H	1.40	1.80
J	0.00	0.10
K	0.70	1.00
L	0.37	0.48
M	0.10	0.25

www.DataSheet4U.com


Maximum Ratings (T_a=25°C Unless otherwise noted)

Characteristic	Symbol	Value	Unit
Reverse Voltage	V _R	20	V
Forward Current	I _F	100	mA
Power Dissipation	P _D	150	mW
Operating Junction Temperature Range	T _J	+150	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C

Electrical Characteristics (T_J=125°C Unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
Reverse Breakdown Voltage I _R =100μA	V _(BR)	20	-	V
Forward Voltage I _F =10mA	V _F	-	1.0	V
Reverse Leakage V _R =15V	I _R	-	0.1	μA
Total Capacitance V _R =6V, f=1.0MHz	C _D	-	4.0	pF

Device Marking

Item	Marking	Equivalent Circuit diagram
WA221 <small>www.DataSheet4U.com</small>	K	

Electrical Characteristic curves($T_A=25^\circ\text{C}$)

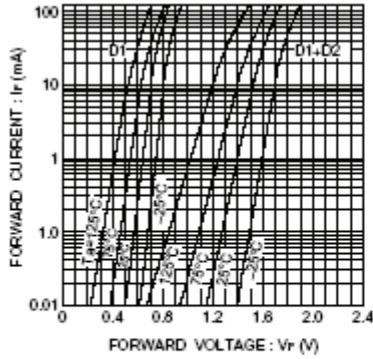


Fig.1 Forward characteristics

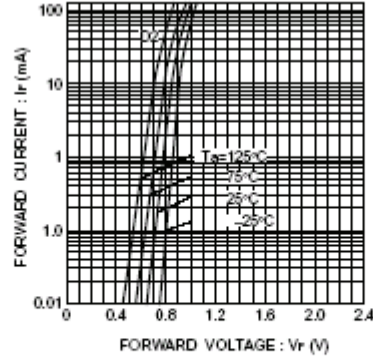


Fig.2 Forward characteristics

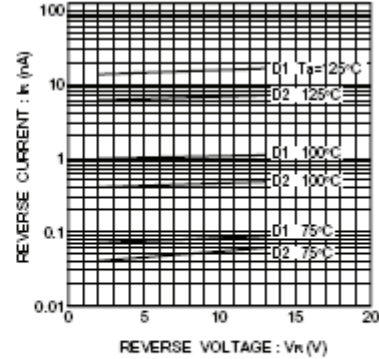


Fig.3 Reverse characteristics

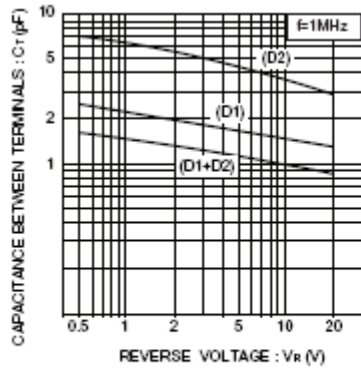


Fig.4 Capacitance between terminals characteristics