

**Voltage-Controlled Attenuator Module  
100 to 2000 MHz**

**G30 / SMG30**

V3

**Features**

- FAST SWITCHING: < 0.2  $\mu$ sec, 10 TO 90% (TYP.)  
< 1  $\mu$ sec, 0 TO 100% (TYP.)
- HIGH DYNAMIC RANGE: 40 dB TO 1000 MHz (TYP.)
- LOW VSWR: 1.4:1 (TYP.)

**Description**

The G30 attenuator is a discrete hybrid design, which uses thin film manufacturing processes for accurate performance and high reliability.


This design uses three pin diodes to provide a non linear attenuation response across a broadband frequency range. Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

**Ordering Information**

Part Number	Package
G30	TO-8
SMG30	Surface Mount
CG30 **	SMA Connectorized

\*\* The connectorized version is not RoHs compliant.

**Product Image**

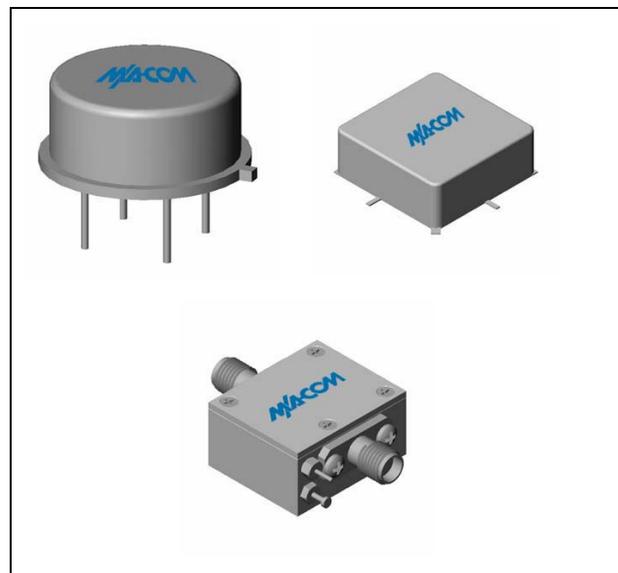

**Electrical Specifications:  $Z_0 = 50\Omega$ ,  $V_{CC} = +15 V_{DC}$**

Parameter	Units	Typical	Guaranteed	
		25°C	0° to 50°C	-54° to +85°C*
Frequency	MHz	5-2200	100-2000	100-2000
Maximum Attenuation Available (min)	100-500 MHz	>50	40	37
	500-1000 MHz	>44	35	32
	1000-2000 MHz	>38	30	27
Insertion Loss ( $V_{ctrl} = +15 V$ ) (max)	100-500 MHz	<2.1	2.8	3.0
	500-1000 MHz	<2.3	3.0	3.2
	1000-2000 MHz	<3.0	3.5	3.8
VSWR (worst case in attenuation range)	0-25 dB Attenuation	1.4:1	2.0:1	2.0:1
	>25 dB Attenuation	<1.7:1	2.2:1	2.2:1
Flatness Over Frequency (max) (Attenuation = min to 15 dB, 100-1000 MHz)	100-1000 MHz	$\pm 0.5$	$\pm 1.0$	$\pm 1.0$
	1000-2000 MHz	$\pm 1.0$	$\pm 1.5$	$\pm 1.7$
Switching Speed (max.)	10% - 90%	<0.2	0.4	0.6
	0% - 100%	<1	2	3
Bias Voltage	Volts	+15	+15	+15
Bias Current (max)	mA	7	10	12
Control Voltage	Volts	0 to +15	0 to +15	0 to +15
Control Current (max)	mA	7	10	10

\*Over temperature performance limits for part number CG30, guaranteed from 0°C to +50°C only.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298



Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

**Voltage-Controlled Attenuator Module  
100 to 2000 MHz**

**G30 / SMG30**

V3

**Typical Performance Curves at +25°C**

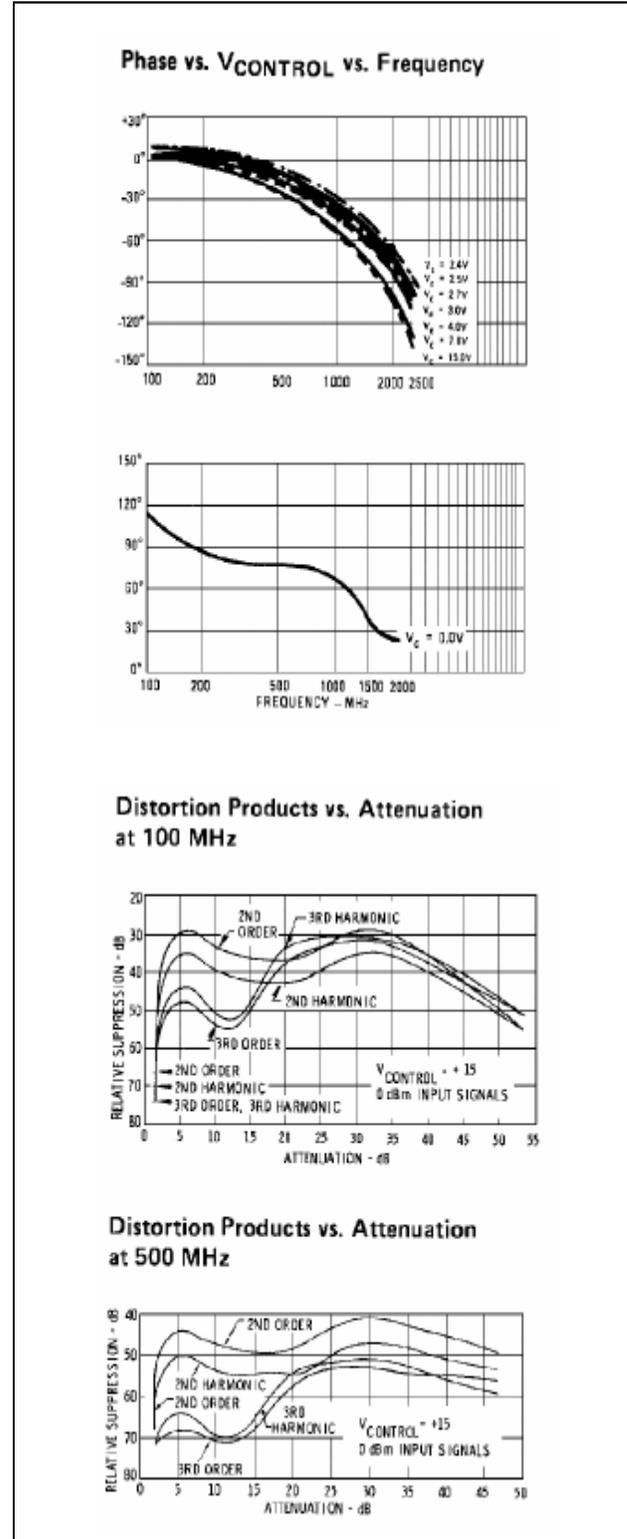
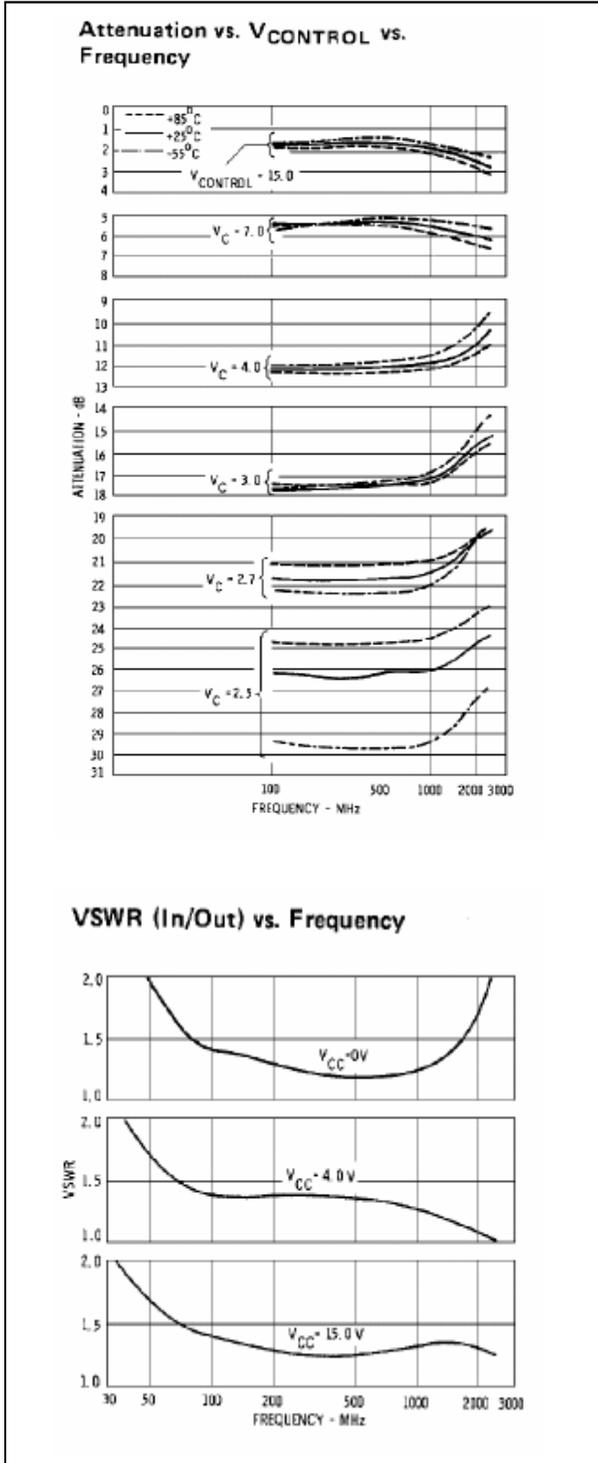


**Voltage-Controlled Attenuator Module  
100 to 2000 MHz**

**G30 / SMG30**

V3


**Typical Performance Curves at +25°C**

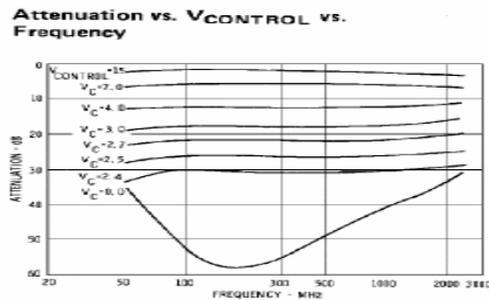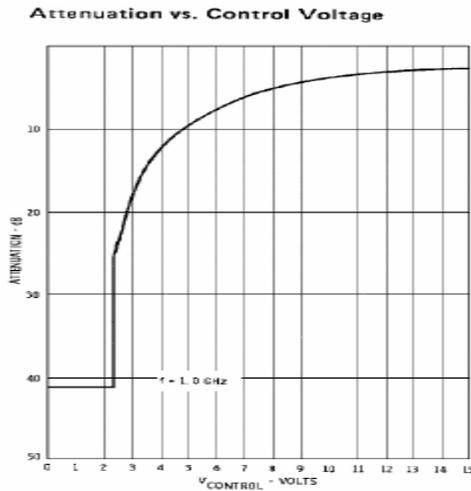

**Absolute Maximum Ratings**


Parameter	Absolute Maximum
Storage Temperature	-62°C to +125°C
Maximum Case Temperature	125°C
Maximum DC Voltage	+18 V
Maximum DC Bias Voltage	+20 V
Maximum Short Term RF Input power (1 minute max.)	200 mW
Maximum Peak Power (3 µsec max.)	1 W
"S" Series Burn-In Temperature (case)	+125°C

**Outline Drawing: TO-8 \***

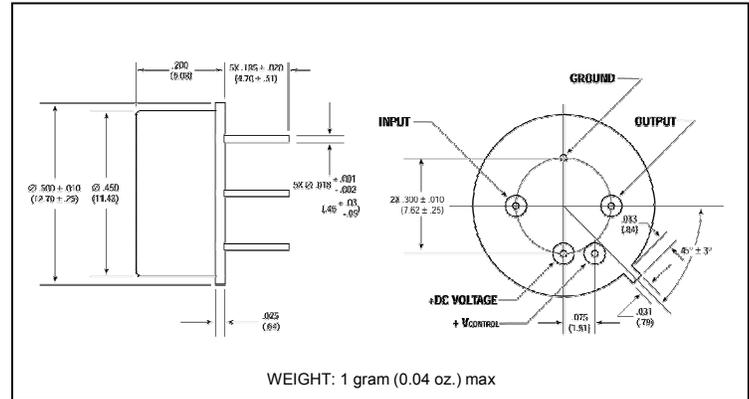


WEIGHT: 1 gram (0.04 oz.) max

**Outline Drawing: Surface Mount \***

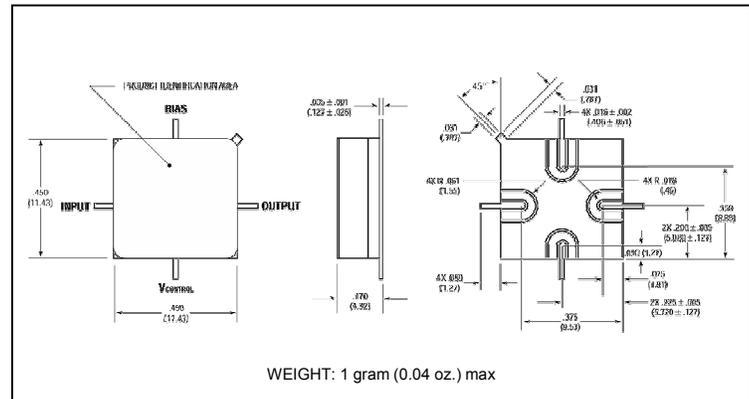

WEIGHT: 1 gram (0.04 oz.) max

**Outline Drawing: SMA Connectorized \***

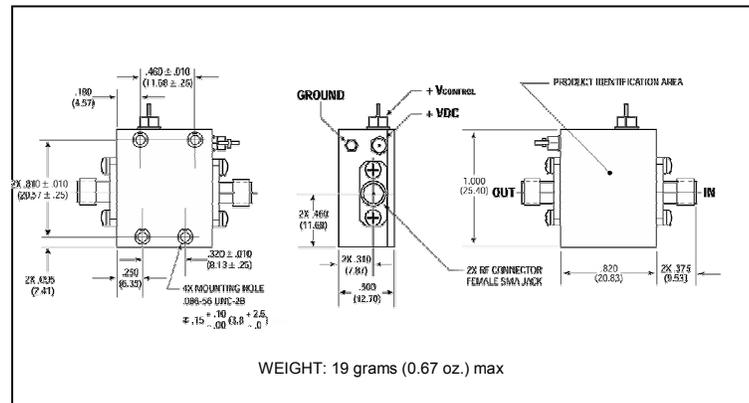

WEIGHT: 19 grams (0.67 oz.) max

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.