

MOS INTEGRATED CIRCUIT
MC-4516DC72**16 M-WORD BY 72-BIT SYNCHRONOUS DYNAMIC RAM MODULE
REGISTERED TYPE****Description**

The MC-4516DC72 is a 16,777,216 words by 72 bits synchronous dynamic RAM module on which 18 pieces of 64M SDRAM : μ PD4564841 are assembled.

This module provides high density and large quantities of memory in a small space without utilizing the surface-mounting technology on the printed circuit board.

Decoupling capacitors are mounted on power supply line for noise reduction.

Features

- 16,777,216 words by 72 bits organization (ECC type)
- Clock frequency and Clock access time

Family	/CAS Latency	Clock frequency (MAX.)	Burst cycle time (MIN.)	Power consumption (MAX.)	
				Active	Standby
MC-4516DC72-A10	CL = 3	100 MHz	10 ns	5.454 W	130 mW (CMOS level input)
	CL = 2	67 MHz	15 ns	5.292 W	
MC-4516DC72-A12	CL = 3	83 MHz	12 ns	5.130 W	68.4 mW (CMOS level input)
	CL = 2	55 MHz	18 ns	4.968 W	
★ MC-4516DC72-A10B	CL = 3	100 MHz	10 ns	5.616 W	68.4 mW (CMOS level input)
	CL = 2	67 MHz	15 ns	5.292 W	

- Fully Synchronous Dynamic RAM, with all signals referenced to a positive clock edge
- Pulsed interface
- Possible to assert random column address in every cycle
- Quad internal banks controlled by BA0 and BA1 (Bank Select)
- Programmable burst-length (1, 2, 4, 8 and Full Page)
- Programmable wrap sequence (Sequential / Interleave)
- Programmable /CAS latency (2, 3)
- Automatic precharge and controlled precharge
- CBR (Auto) refresh and self refresh
- Single +3.3 V +0.3 / -0.15 V power supply
- LVTTI compatible
- 4,096 refresh cycles/64 ms
- Burst termination by Burst Stop command and Precharge command
- 200-pin dual in-line memory module (Pin pitch = 1.27 mm)
- Registered type
- Serial PD

The information in this document is subject to change without notice.

Ordering Information


Part number	Clock frequency	Package	Mounted devices
MC-4516DC72F-A10	100 MHz	200-pin Dual In-line Memory Module (Socket Type)	18 pieces of 64M SDRAM : μ PD4564841G5 (400 mil TSOP (II))
MC-4516DC72F-A12	83 MHz		
MC-4516DC72F-A10B	100 MHz	Edge connector : Gold plated	[Double side]

★

Pin Configuration

200-pin Dual In-line Memory Module Socket Type (Edge connector : Gold plated)


[MC-4516DC72F]

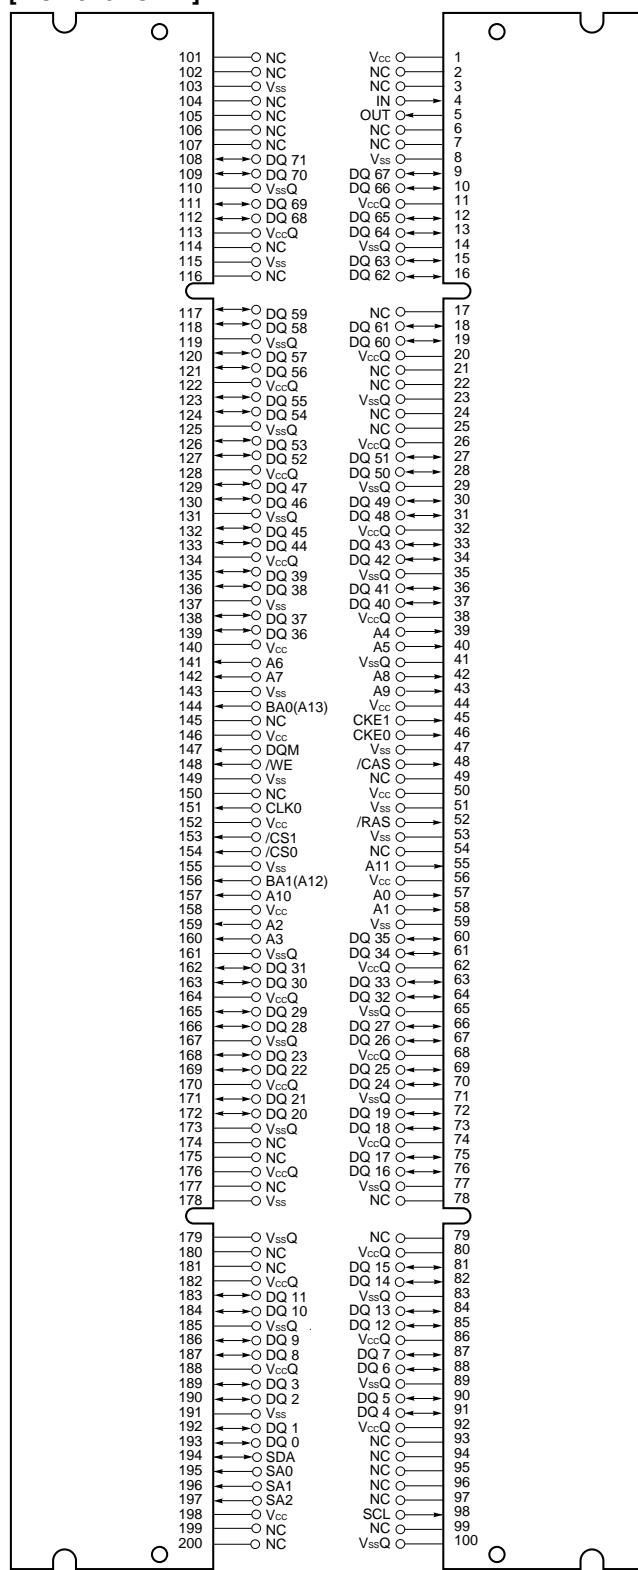

/xxx indicates active low signal.

A0 - A11	: Address Inputs
[Row : A0 - A11, Column : A0 - A8]	
BA0 (A13), BA1 (A12)	: SDRAM Bank Select
DQ0 - DQ71	: Data Inputs/Outputs
CLK0	: Clock Input
CKE0, CKE1	: Clock Enable Input
/CS0, /CS1	: Chip Select Input
/RAS	: Row Address Strobe
/CAS	: Column Address Strobe
/WE	: Write Enable
DQM	: DQ Mask Enable
IN, OUT	: Unbuffered Physical Detect Input/Output (separate)
SA0 - SA2	: Address Input for EEPROM
SDA	: Serial Data I/O for PD
SCL	: Clock Input for PD
Vcc	: Power Supply
VccQ	: Power Supply for Data Input/Output
Vss	: Ground
VssQ	: Ground for Data Input/Output
NC	: No Connection

Block Diagram

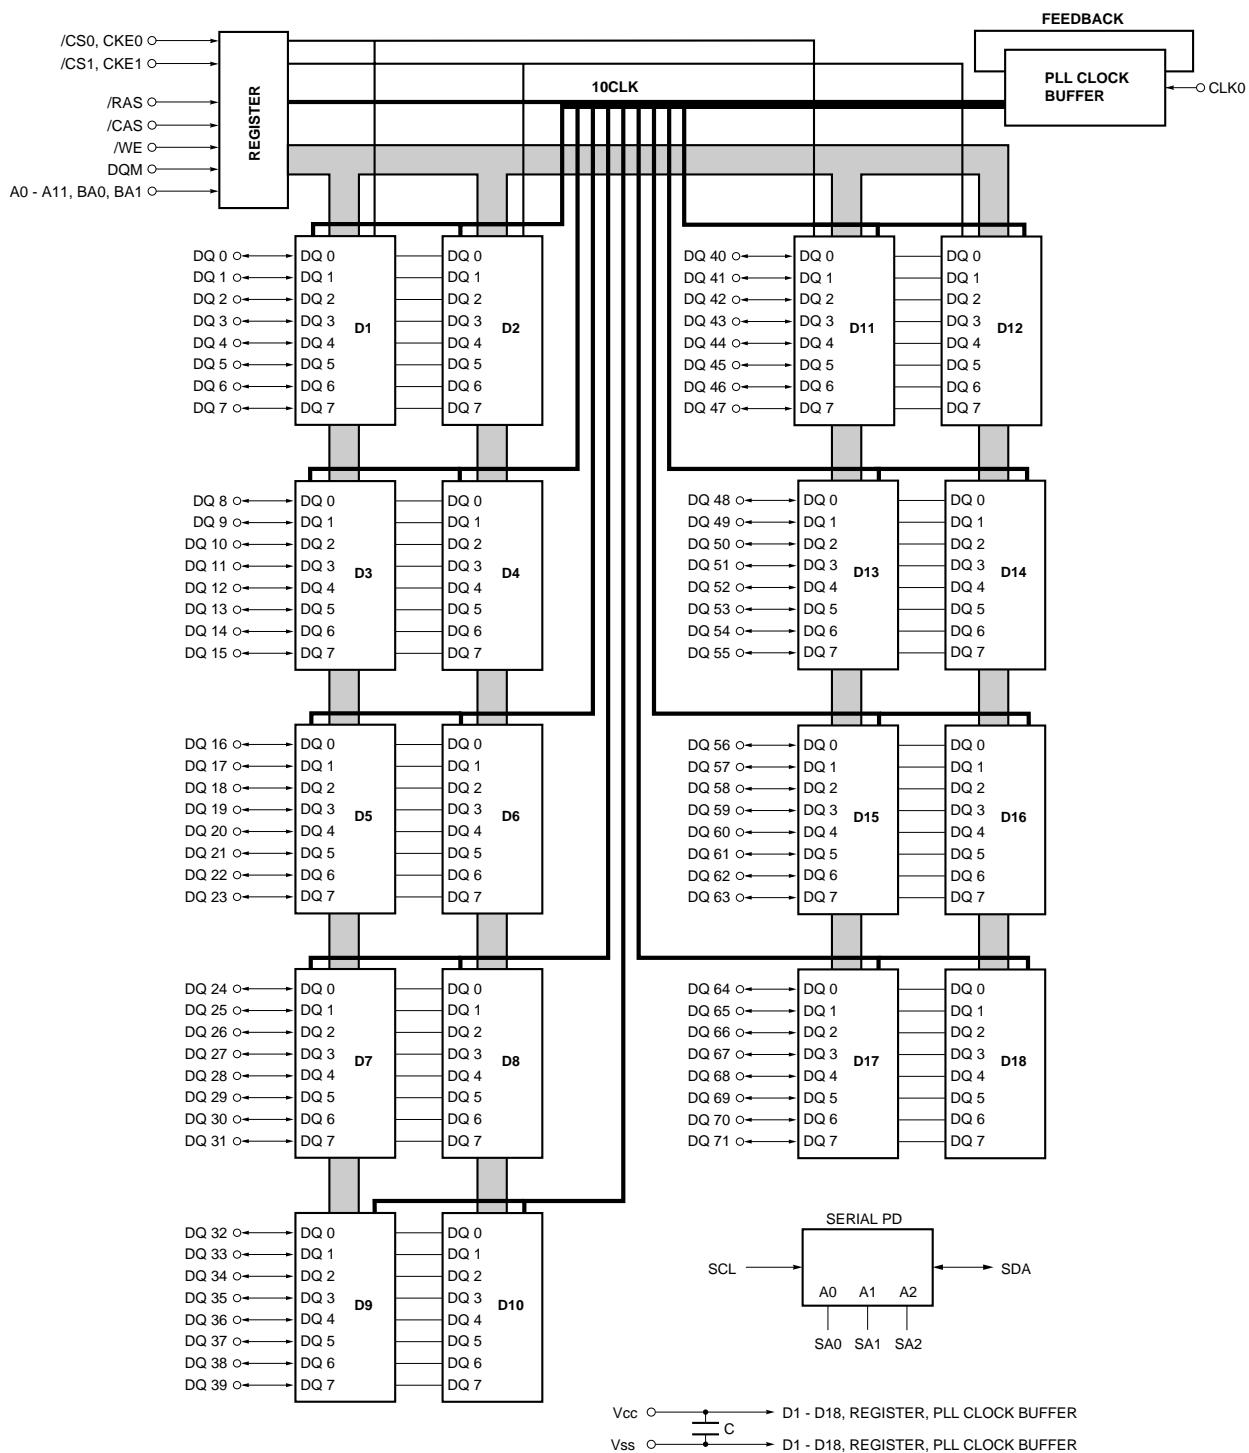

Remarks 1. A $10 \Omega \pm 5\%$ resistor shall be wired in series with DQ0 - DQ71 near the card edge connector.

All clock line outputs from the PLL CLOCK BUFFER shall be equal length.

2. D1 - D18 : μ PD4564841 (2M words \times 8 bits \times 4 banks)

Electrical Specifications

- All voltages are referenced to Vss (GND).
- After power up, wait more than 100 μ s and then, execute power on sequence and auto refresh before proper device operation is achieved.

Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Voltage on power supply pin relative to GND	V _{CC}		-0.5 to +4.6	V
Voltage on input pin relative to GND	V _T		-0.5 to +4.6	V
Short circuit output current	I _O		50	mA
Power dissipation	P _D		21	W
Operating ambient temperature	T _A		0 to +70	°C
Storage temperature	T _{STG}		-55 to +125	°C

Caution Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply voltage	V _{CC}		3.15	3.3	3.6	V
High level input voltage	V _{IH}		2.0		V _{CC} + 0.3	V
Low level input voltage	V _{IL}		-0.3		+0.8	V
Operating ambient temperature	T _A		0		70	°C

Capacitance (T_A = 25 °C, f = 1 MHz)

Parameter	Symbol	Test condition	MIN.	TYP.	MAX.	Unit
Input capacitance	C _{i1}	A0 - A11, BA0, BA1, CKE0, CKE1, /CS0, /CS1, /RAS, /CAS, /WE, DQM			15	pF
	C _{i2}	CLK0			8	
Data input/output capacitance	C _{i/o}	DQ0 - DQ71			15	pF

DC Characteristics (Recommended Operating Conditions unless otherwise noted)

[MC-4516DC72-A10, 4516DC72-A12]

Parameter	Symbol	Test condition				MIN.	MAX.	Unit	Notes	
Operating current	Icc1	Burst length = 1, $t_{RC} \geq t_{RC(MIN.)}$, $I_o = 0 \text{ mA}$	/CAS latency = 2	-A10		1,155	mA	1		
				-A12		1,110				
		/CAS latency = 3	-A10		1,200					
				-A12		1,155				
Precharge standby current in power down mode	Icc2P	$CKE \leq V_{IL(MAX.)}$, $t_{CK} = 15 \text{ ns}$				54	mA	2		
	Icc2PS	$CKE \leq V_{IL(MAX.)}$, $t_{CK} = \infty$				36				
Precharge standby current in non power down mode	Icc2N	$CKE \geq V_{IH(MIN.)}$, $t_{CK} = 15 \text{ ns}$, $/CS \geq V_{IH(MIN.)}$, Input signals are changed one time during 30 ns.				360	mA	2		
	Icc2NS	$CKE \geq V_{IH(MIN.)}$, $t_{CK} = \infty$, Input signals are stable.				108				
Active standby current in power down mode	Icc3P	$CKE \leq V_{IL(MAX.)}$, $t_{CK} = 15 \text{ ns}$				90	mA	2		
	Icc3PS	$CKE \leq V_{IL(MAX.)}$, $t_{CK} = \infty$				72				
Active standby current in non power down mode	Icc3N	$CKE \geq V_{IH(MIN.)}$, $t_{CK} = 15 \text{ ns}$, $/CS \geq V_{IH(MIN.)}$, Input signals are changed one time during 30 ns.				450	mA	2		
	Icc3NS	$CKE \geq V_{IH(MIN.)}$, $t_{CK} = \infty$, Input signals are stable.				180				
Operating current (Burst mode)	Icc4	$t_{CK} \geq t_{CK(MIN.)}$, $I_o = 0 \text{ mA}$	/CAS latency = 2	-A10		1,245	mA	3		
				-A12		1,155				
			/CAS latency = 3	-A10		1,470				
				-A12		1,380				
Refresh current	Icc5	$t_{RC} \geq t_{RC(MIN.)}$	/CAS latency = 2	-A10		1,470	mA	4		
				-A12		1,380				
			/CAS latency = 3	-A10		1,515				
				-A12		1,425				
Self refresh current	Icc6	$CKE \leq 0.2 \text{ V}$				36	mA	2		
Input leakage current	I _{I(L)}	$V_I = 0 \text{ to } 3.6 \text{ V}$, All other pins not under test = 0 V				-10	+10	μA		
Output leakage current	I _{O(L)}	D_{OUT} is disabled, $V_O = 0 \text{ to } 3.6 \text{ V}$				-10	+10	μA		
High level output voltage	V _{OH}	$I_o = -2.0 \text{ mA}$				2.4		V		
Low level output voltage	V _{OL}	$I_o = +2.0 \text{ mA}$				0.4	V			

Notes 1. Icc1 depends on output loading and cycle rates. Specified values are obtained with the output open. In addition to this, Icc1 is measured on condition that addresses are changed only one time during $t_{CK(MIN.)}$.

2. $V_{CC} - 0.2 \text{ V} \leq V_{IH(CLK)} \leq V_{IH(MAX.)}$, $0 \text{ V} \leq V_{IL} \leq 0.2 \text{ V}$

3. Icc4 depends on output loading and cycle rates. Specified values are obtained with the output open. In addition to this, Icc4 is measured on condition that addresses are changed only one time during $t_{CK(MIN.)}$.

4. Icc5 is measured on condition that addresses are changed only one time during $t_{CK(MIN.)}$.

★

[MC-4516DC72-A10B]

Parameter	Symbol	Test condition		MIN.	MAX.	Unit	Notes
Operating current	Icc1	Burst length = 1, $t_{RC} \geq t_{CK(MIN.)}$, $I_o = 0 \text{ mA}$	/CAS latency = 2		1,110	mA	1
			/CAS latency = 3		1,200		
Precharge standby current in power down mode	Icc2P	CKE $\leq V_{IL(MAX.)}$, $t_{CK} = 15 \text{ ns}$		218	mA	2	
	Icc2PS	CKE $\leq V_{IL(MAX.)}$, $t_{CK} = \infty$		19			
Precharge standby current in non power down mode	Icc2N	CKE $\geq V_{IH(MIN.)}$, $t_{CK} = 15 \text{ ns}$, /CS $\geq V_{IH(MIN.)}$, Input signals are changed one time during 30 ns.		560	mA	2	
	Icc2NS	CKE $\geq V_{IH(MIN.)}$, $t_{CK} = \infty$, Input signals are stable.		108			
Active standby current in power down mode	Icc3P	CKE $\leq V_{IL(MAX.)}$, $t_{CK} = 15 \text{ ns}$		290	mA	2	
	Icc3PS	CKE $\leq V_{IL(MAX.)}$, $t_{CK} = \infty$		72			
Active standby current in non power down mode	Icc3N	CKE $\geq V_{IH(MIN.)}$, $t_{CK} = 15 \text{ ns}$, /CS $\geq V_{IH(MIN.)}$, Input signals are changed one time during 30 ns.		650	mA	2	
	Icc3NS	CKE $\geq V_{IH(MIN.)}$, $t_{CK} = \infty$, Input signals are stable.		180			
Operating current (Burst mode)	Icc4	$t_{CK} \geq t_{CK(MIN.)}$, $I_o = 0 \text{ mA}$	/CAS latency = 2	1,155	mA	3	
			/CAS latency = 3	1,470			
Refresh current	Icc5	$t_{RC} \geq t_{RC(MIN.)}$	/CAS latency = 2	1,470	mA	4	
			/CAS latency = 3	1,560			
Self refresh current	Icc6	CKE $\leq 0.2 \text{ V}$		218	mA	2	
Input leakage current	I _{I(L)}	V _I = 0 to 3.6 V, All other pins not under test = 0 V	-10	+10	μA		
Output leakage current	I _{O(L)}	D _{OUT} is disabled, V _O = 0 to 3.6 V	-3	+3	μA		
High level output voltage	V _{OH}	I _O = -4.0 mA	2.4		V		
Low level output voltage	V _{OL}	I _O = +4.0 mA		0.4	V		

Notes 1. Icc1 depends on output loading and cycle rates. Specified values are obtained with the output open. In addition to this, Icc1 is measured on condition that addresses are changed only one time during tck(MIN.).


2. V_{CC} - 0.2 V $\leq V_{IH(CLK)} \leq V_{IH(MAX.)}$, 0 V $\leq V_{IL} \leq 0.2 \text{ V}$

3. Icc4 depends on output loading and cycle rates. Specified values are obtained with the output open. In addition to this, Icc4 is measured on condition that addresses are changed only one time during tck(MIN.).

4. Icc5 is measured on condition that addresses are changed only one time during tck(MIN.).

AC Characteristics (Recommended Operating Conditions unless otherwise noted)**AC Characteristics Test Conditions**


- AC measurements assume $t_r = 1$ ns.
- Reference level for measuring timing of input signals is 1.4 V. Transition times are measured between V_{IH} and V_{IL} .
- If t_r is longer than 1 ns, reference level for measuring timing of input signals is $V_{IH\ (MIN.)}$ and $V_{IL\ (MAX.)}$.
- An access time is measured at 1.4 V.

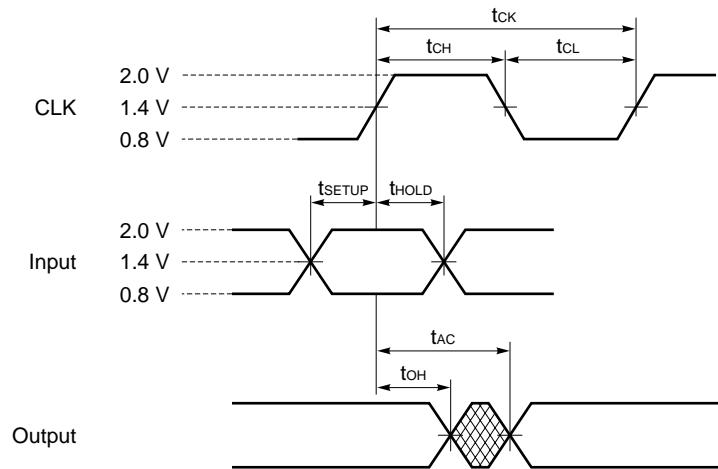

Synchronous Characteristics

[MC-4516DC72-A10, 4516DC72-A12]


Parameter	Symbol	-A10		-A12		Unit	Note
		MIN.	MAX.	MIN.	MAX.		
Clock cycle time	/CAS latency = 3	t _{C3}	10 (100 MHz)	12 (83 MHz)		ns	
	/CAS latency = 2	t _{C2}	15 (67 MHz)	18 (55 MHz)		ns	
Access time from CLK	/CAS latency = 3	t _{AC3}		8.5		9.5	ns 1
	/CAS latency = 2	t _{AC2}		9.5		11.5	ns 1
Input CLK duty cycle	—	40	60	40	60	%	
Data-out hold time	t _{OH}	2.5		2.5		ns	1
Data-out low-impedance time	t _{LZ}	0		0		ns	
Data-out high-impedance time	t _{HZ}	3.5	8.0	3.5	8.0	ns	
Data-in setup time	t _{DS}	3.0		3.5		ns	
Data-in hold time	t _{DH}	1.5		2.0		ns	
Address setup time	t _{AS}	3.5		3.5		ns	
Address hold time	t _{AH}	0.5		0.5		ns	
CKE setup time	t _{CKS}	3.5		3.5		ns	
CKE hold time	t _{CKH}	0.5		0.5		ns	
CKE setup time (Power down exit)	t _{CKSP}	3.0		3.5		ns	
Command (/CS0, /CS1, /RAS, /CAS, /WE, DQM) setup time	t _{CMS}	3.5		3.5		ns	
Command (/CS0, /CS1, /RAS, /CAS, /WE, DQM) hold time	t _{CMH}	0.5		0.5		ns	

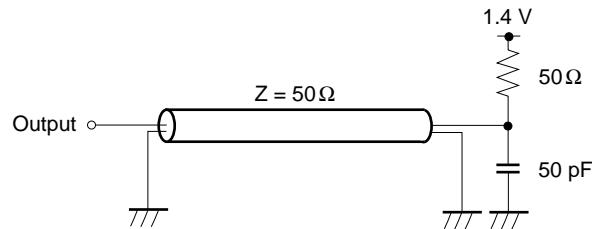Note 1. Output load

★ [MC-4516DC72-A10B]

Parameter		Symbol	-A10B		Unit	Note
			MIN.	MAX.		
Clock cycle time	/CAS latency = 3	t _{Ck3}	10	(100 MHz)	ns	
	/CAS latency = 2	t _{Ck2}	15	(67 MHz)	ns	
Access time from CLK	/CAS latency = 3	t _{AC3}		7.5	ns	1
	/CAS latency = 2	t _{AC2}		8.5	ns	1
Input CLK duty cycle		—	40	60	%	
Data-out hold time		t _{OH}	2.5		ns	1
Data-out low-impedance time		t _{LZ}	0		ns	
Data-out high-impedance time	/CAS latency = 3	t _{HZ3}	2.5	7.5	ns	
	/CAS latency = 2	t _{HZ2}	2.5	8.5	ns	
Data-in setup time		t _{DS}	3.0		ns	
Data-in hold time		t _{DH}	1.5		ns	
Address setup time		t _{AS}	3.5		ns	
Address hold time		t _{AH}	0.5		ns	
CKE setup time		t _{Cks}	3.5		ns	
CKE hold time		t _{Ckh}	0.5		ns	
CKE setup time (Power down exit)		t _{Cksp}	3.0		ns	
Command (/CS0, /CS1, /RAS, /CAS, /WE, DQM) setup time		t _{Cms}	3.5		ns	
Command (/CS0, /CS1, /RAS, /CAS, /WE, DQM) hold time		t _{Cmh}	0.5		ns	

Note 1. Output load

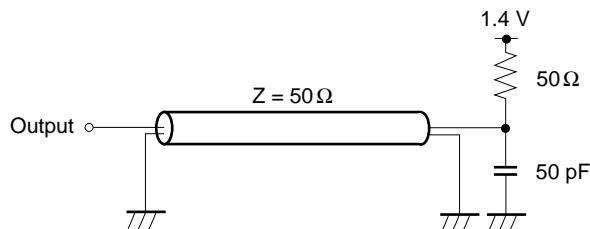

Asynchronous Characteristics

[MC-4516DC72-A10, 4516DC72-A12]

Parameter	Symbol	-A10		-A12		Unit	Note
		MIN.	MAX.	MIN.	MAX.		
REF to REF/ACT command period	t _{RC}	100		120		ns	
ACT to PRE command period	t _{RAS}	60	120,000	72	120,000	ns	
PRE to ACT command period	t _{RP}	30		36		ns	
Delay time ACT to READ/WRITE command	t _{RCD}	30		36		ns	
ACT(one) to ACT(another) command period	t _{RRD}	20		24		ns	
Data-in to PRE command period	t _{DPL}	-1CLK + 10		-1CLK + 12		ns	
Data-in to ACT(REF) command period (Auto precharge)	/CAS latency = 3	t _{DAL3}	1CLK + 30		1CLK + 30	ns	
	/CAS latency = 2	t _{DAL2}	30		30	ns	
Mode register set cycle time	t _{RSC}	20		20		ns	
Transition time	t _T	1	30	1	30	ns	
Refresh time	t _{REF}		64		64	ms	

★

[MC-4516DC72-A10B]

Parameter	Symbol	-A10B		Unit	Note
		MIN.	MAX.		
REF to REF/ACT command period	t _{RC}	90		ns	
ACT to PRE command period	t _{RAS}	60	120,000	ns	
PRE to ACT command period	t _{RP}	30		ns	
Delay time ACT to READ/WRITE command	t _{RCD}	30		ns	
ACT(one) to ACT(another) command period	t _{RRD}	20		ns	
Data-in to PRE command period	t _{DPL}	10		ns	
Data-in to ACT(REF) command period (Auto precharge)	/CAS latency = 3	t _{DAL3}	1CLK + 30		ns
	/CAS latency = 2	t _{DAL2}	1CLK + 30		ns
Mode register set cycle time	t _{RSC}	2		CLK	
Transition time	t _T	1	30	ns	
Refresh time	t _{REF}		64	ms	

Relationship between Frequency and Latency

[MC-4516DC72-A10, 4516DC72-A12]

Speed version	-A10		-A12	
Clock cycle time [ns]	10	15	12	18
Frequency [MHz]	100	67	83	55
/CAS latency + 1 cycle	3 + 1	2 + 1	3 + 1	2 + 1
[t _{RCD}]	3	2	3	2
/RAS latency (/CAS latency + [t _{RCD}])	7	5	7	5
[t _{RC}]	10	7	9	6
[t _{RAS}]	6	4	6	4
[t _{RRD}]	2	2	2	2
[t _{RP}]	3	2	3	2
[t _{DPL}]	0	0	0	0
[t _{DAL}]	4	2	4	2

Remark All internal signals (A0-A11, BA0, BA1, /CS0, /CS1, CKE0, CKE1, /RAS, /CAS, /WE, DQM) from register are delayed by one cycle. Therefore, DQ is delayed by one cycle.

[MC-4516DC72-A10B]

Speed version	-A10B	
Clock cycle time [ns]	10	15
Frequency [MHz]	100	67
/CAS latency + 1 cycle	3 + 1	2 + 1
[t _{RCD}]	3	2
/RAS latency (/CAS latency + [t _{RCD}])	7	5
[t _{RC}]	9	6
[t _{RAS}]	6	4
[t _{RRD}]	2	2
[t _{RP}]	3	2
[t _{DPL}]	0	0
[t _{DAL}]	3	2

Remark All internal signals (A0-A11, BA0, BA1, /CS0, /CS1, CKE0, CKE1, /RAS, /CAS, /WE, DQM) from register are delayed by one cycle. Therefore, DQ is delayed by one cycle.

Serial PD

[MC-4516DC72-A10, 4516DC72-A12]

(1/2)

Byte No.	Function Described		Hex	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Notes
0	Defines the number of bytes written into serial PD memory		80H	1	0	0	0	0	0	0	0	128 bytes
1	Total number of bytes of serial PD memory		08H	0	0	0	0	1	0	0	0	256 bytes
2	Fundamental memory type		04H	0	0	0	0	0	1	0	0	SDRAM
3	Number of rows		0CH	0	0	0	0	1	1	0	0	12 rows
4	Number of columns		09H	0	0	0	0	1	0	0	1	9 columns
5	Number of module banks		02H	0	0	0	0	0	0	1	0	2 banks
6	Data width		48H	0	1	0	0	1	0	0	0	72 bits
7	Data width (continued)		00H	0	0	0	0	0	0	0	0	0
8	Voltage interface		01H	0	0	0	0	0	0	0	1	LVTTL
9	CL = 3 Cycle time	-A10	A0H	1	0	1	0	0	0	0	0	10 ns
		-A12	C0H	1	1	0	0	0	0	0	0	12 ns
10	CL =3 Access time	-A10	85H	1	0	0	0	0	1	0	1	8.5 ns
		-A12	95H	1	0	0	1	0	1	0	1	9.5 ns
11	DIMM configuration type		02H	0	0	0	0	0	0	1	0	ECC
12	Refresh rate/type		80H	1	0	0	0	0	0	0	0	Normal
13	SDRAM width		08H	0	0	0	0	1	0	0	0	x8
14	Error checking SDRAM width		08H	0	0	0	0	1	0	0	0	x8
15	Minimum clock delay		01H	0	0	0	0	0	0	0	1	1 clock
16	Burst length supported		8FH	1	0	0	0	1	1	1	1	1,2,4,8,F
17	Number of banks on each SDRAM		04H	0	0	0	0	0	1	0	0	4 banks
18	/CAS latency supported		06H	0	0	0	0	0	1	1	0	2, 3
19	/CS latency supported		01H	0	0	0	0	0	0	0	1	0
20	/WE latency supported		01H	0	0	0	0	0	0	0	1	0
21	SDRAM module attributes		16H	0	0	0	1	0	1	1	0	Registered
22	SDRAM device attributes : General		1EH	0	0	0	1	1	1	1	0	
23	CL = 2 Cycle time	-A10	F0H	1	1	1	1	0	0	0	0	15 ns
		-A12	30H	0	0	1	1	0	0	0	0	18 ns
24	CL = 2 Access time	-A10	95H	1	0	0	1	0	1	0	1	9.5 ns
		-A12	B5H	1	0	1	1	0	1	0	1	11.5 ns
25 - 26			00H	0	0	0	0	0	0	0	0	
27	$t_{RP}(\text{MIN.})$	-A10	1EH	0	0	0	1	1	1	1	0	30 ns
		-A12	24H	0	0	1	0	0	1	0	0	36 ns
28	$t_{RRD}(\text{MIN.})$	-A10	14H	0	0	0	1	0	1	0	0	20 ns
		-A12	18H	0	0	0	1	1	0	0	0	24 ns
29	$t_{RCD}(\text{MIN.})$	-A10	1EH	0	0	0	1	1	1	1	0	30 ns
		-A12	24H	0	0	1	0	0	1	0	0	36 ns
30	$t_{RAS}(\text{MIN.})$	-A10	3CH	0	0	1	1	1	1	0	0	60 ns
		-A12	48H	0	1	0	0	1	0	0	0	72 ns

[MC-4516DC72-A10, 4516DC72-A12]

(2/2)

Byte No.	Function Described		Hex	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Notes
31	Module bank density		20H	0	0	1	0	0	0	0	0	128 M bytes
32-61			00H	0	0	0	0	0	0	0	0	
62	SPD revision		01H	0	0	0	0	0	0	0	1	1
63	Checksum for bytes 0 - 62	-A10	A5H	1	0	1	0	0	1	0	1	
		-A12	51H	0	1	0	1	0	0	0	1	
64-71	Manufacture's JEDEC ID code											
72	Manufacturing location											
73 - 90	Manufacture's P/N											
91 - 92	Revision code											
93 - 94	Manufacturing date											
95 - 98	Assembly serial number											
99 -125	Mfg specific											
★ 126			00H	0	0	0	0	0	0	0	0	
★ 127			00H	0	0	0	0	0	0	0	0	

★

[MC-4516DC72-A10B]


(1/2)

Byte No.	Function Described	Hex	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Notes
0	Defines the number of bytes written into serial PD memory	80H	1	0	0	0	0	0	0	0	128 bytes
1	Total number of bytes of serial PD memory	08H	0	0	0	0	1	0	0	0	256 bytes
2	Fundamental memory type	04H	0	0	0	0	0	1	0	0	SDRAM
3	Number of rows	0CH	0	0	0	0	1	1	0	0	12 rows
4	Number of columns	09H	0	0	0	0	1	0	0	1	9 columns
5	Number of module banks	02H	0	0	0	0	0	0	1	0	2 banks
6	Data width	48H	0	1	0	0	1	0	0	0	72 bits
7	Data width (continued)	00H	0	0	0	0	0	0	0	0	0
8	Voltage interface	01H	0	0	0	0	0	0	0	1	LVTTL
9	CL = 3 Cycle time	A0H	1	0	1	0	0	0	0	0	10 ns
10	CL =3 Access time	75H	0	1	1	1	0	1	0	1	7.5 ns
11	DIMM configuration type	02H	0	0	0	0	0	0	1	0	ECC
12	Refresh rate/type	80H	1	0	0	0	0	0	0	0	Normal
13	SDRAM width	08H	0	0	0	0	1	0	0	0	x8
14	Error checking SDRAM width	08H	0	0	0	0	1	0	0	0	x8
15	Minimum clock delay	01H	0	0	0	0	0	0	0	1	1 clock
16	Burst length supported	8FH	1	0	0	0	1	1	1	1	1,2,4,8,F
17	Number of banks on each SDRAM	04H	0	0	0	0	0	1	0	0	4 banks
18	/CAS latency supported	06H	0	0	0	0	0	1	1	0	2, 3
19	/CS latency supported	01H	0	0	0	0	0	0	0	1	0
20	/WE latency supported	01H	0	0	0	0	0	0	0	1	0
21	SDRAM module attributes	16H	0	0	0	1	0	1	1	0	Registered
22	SDRAM device attributes : General	1EH	0	0	0	1	1	1	1	0	
23	CL = 2 Cycle time	F0H	1	1	1	1	0	0	0	0	15 ns
24	CL = 2 Access time	85H	1	0	0	0	0	1	0	1	8.5 ns
25 - 26		00H	0	0	0	0	0	0	0	0	
27	t _{RP(MIN.)}	1EH	0	0	0	1	1	1	1	0	30 ns
28	t _{RRD(MIN.)}	14H	0	0	0	1	0	1	0	0	20 ns
29	t _{RC(MIN.)}	1EH	0	0	0	1	1	1	1	0	30 ns
30	t _{TRAS(MIN.)}	3CH	0	0	1	1	1	1	0	0	60 ns

★ [MC-4516DC72-A10B]


(2/2)

Byte No.	Function Described	Hex	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Notes
31	Module bank density	10H	0	0	0	1	0	0	0	0	64M bytes
32-61		00H	0	0	0	0	0	0	0	0	
62	SPD revision	01H	0	0	0	0	0	0	0	1	1
63	Checksum for bytes 0 - 62	75H	0	1	1	1	0	1	0	1	
64-71	Manufacture's JEDEC ID code										
72	Manufacturing location										
73 - 90	Manufacture's P/N										
91 - 92	Revision code										
93 - 94	Manufacturing date										
95 - 98	Assembly serial number										
99 -125	Mfg specific										
126		00H	0	0	0	0	0	0	0	0	
127		00H	0	0	0	0	0	0	0	0	

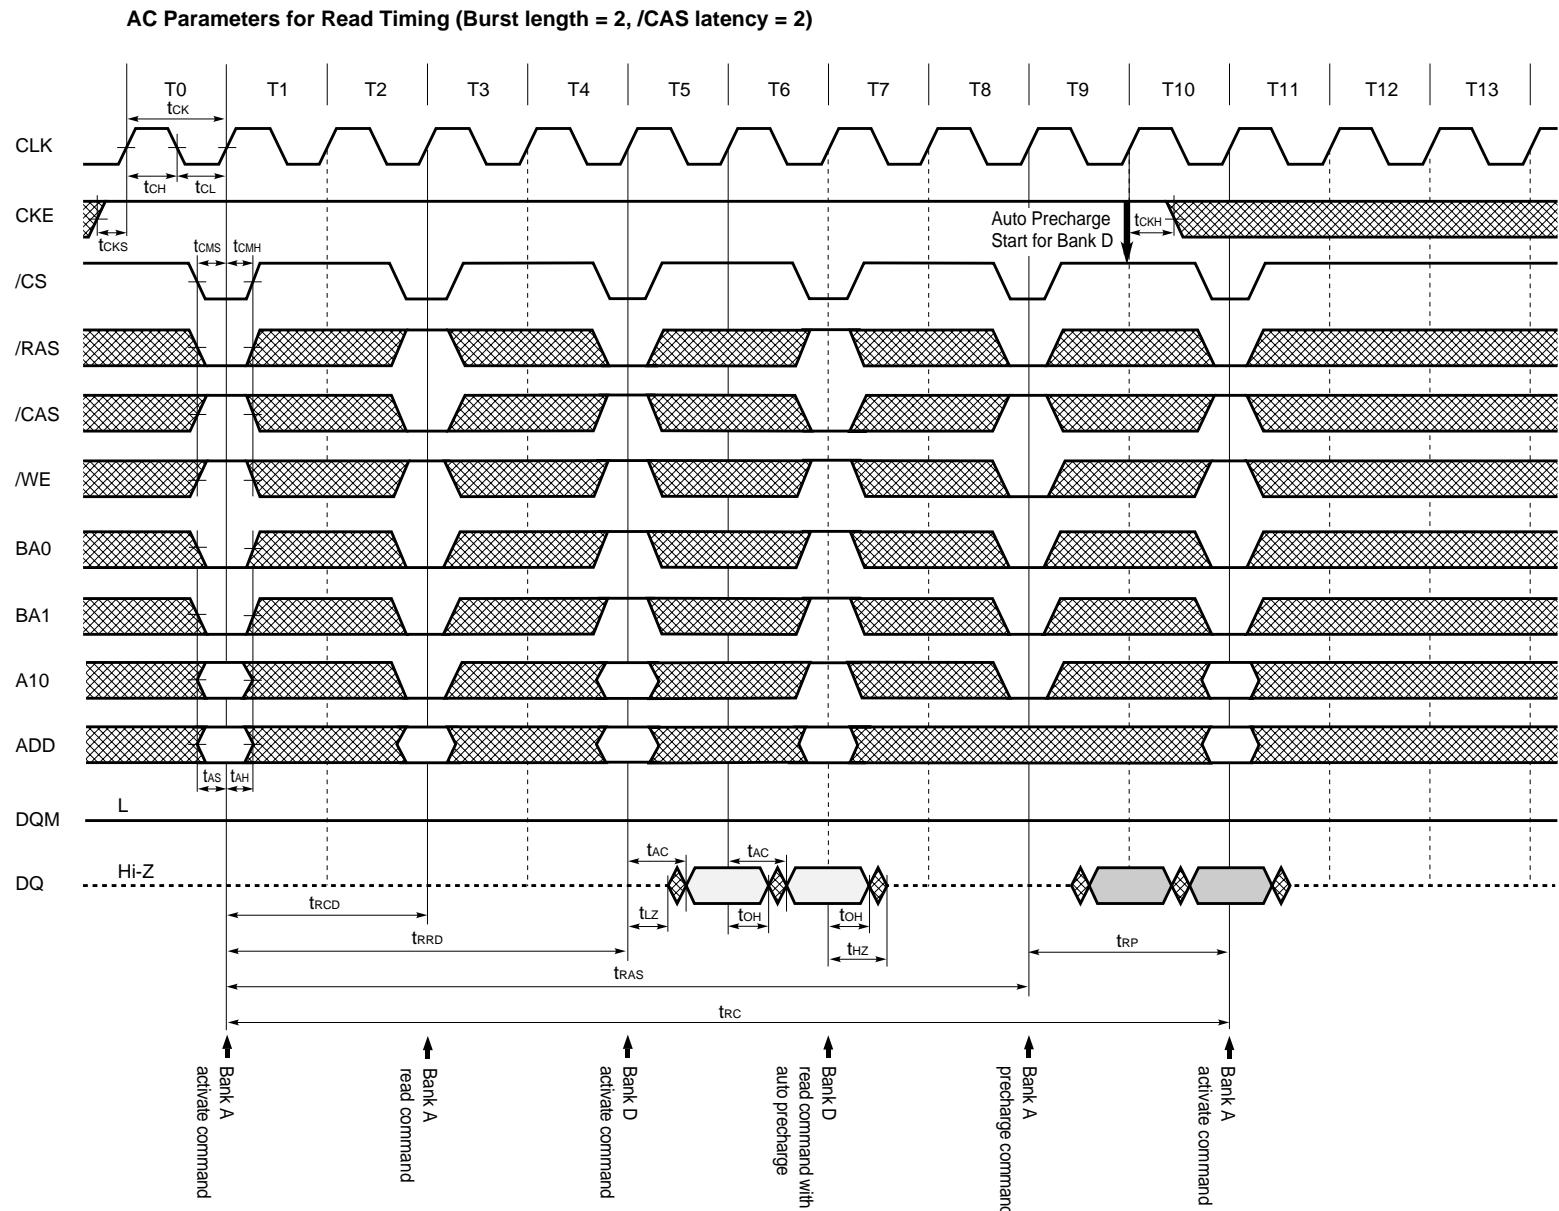

Remark All internal signals (A0 - A11, BA0, BA1, /CS0, CKE0, /RAS, /CAS, /WE, DQM) from register are delayed by one cycle. Therefore, DQ is delayed by one cycle.





AC Parameters for Write Timing (Burst length = 4, /CAS latency = 2)

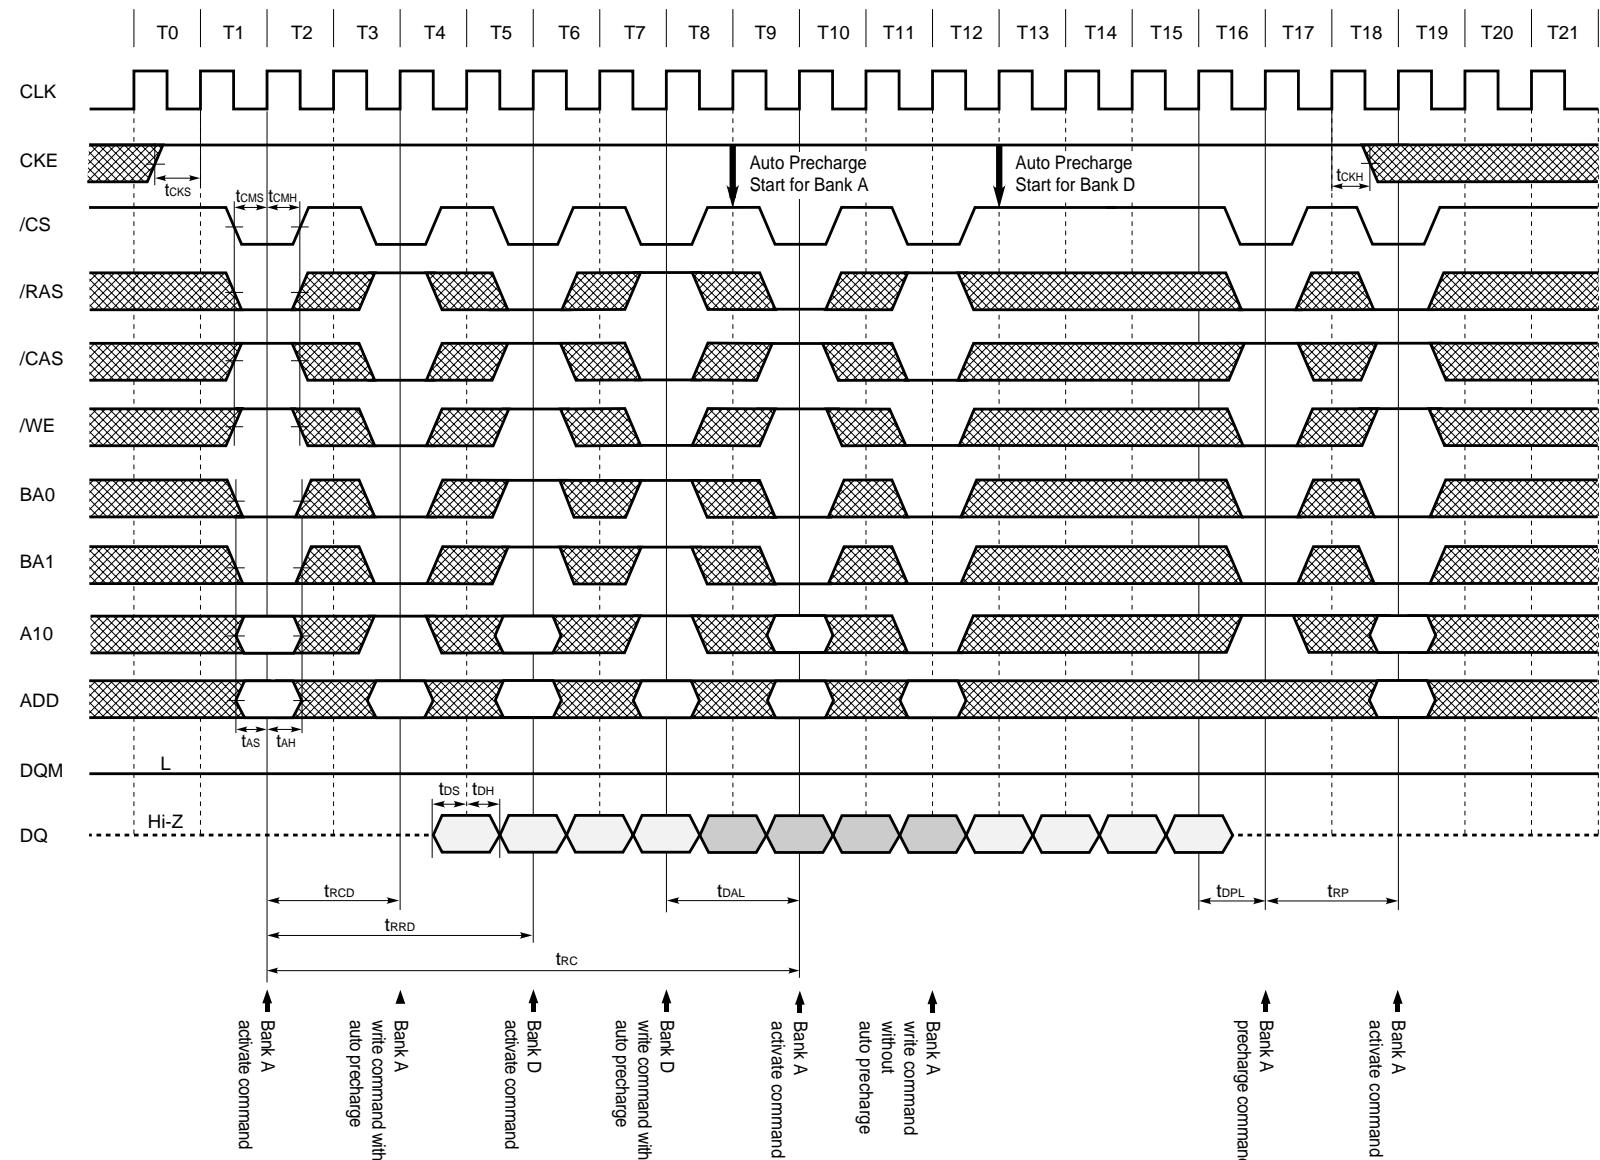

Remark All internal signals (A0 - A11, BA0, BA1, /CS0, CKE0, /RAS, /CAS, /WE, DQM) from register are delayed by one cycle. Therefore, DQ is delayed by one cycle.

Package Drawing

200 PIN DUAL IN-LINE MODULE (SOCKET TYPE)

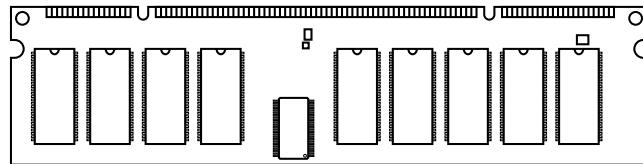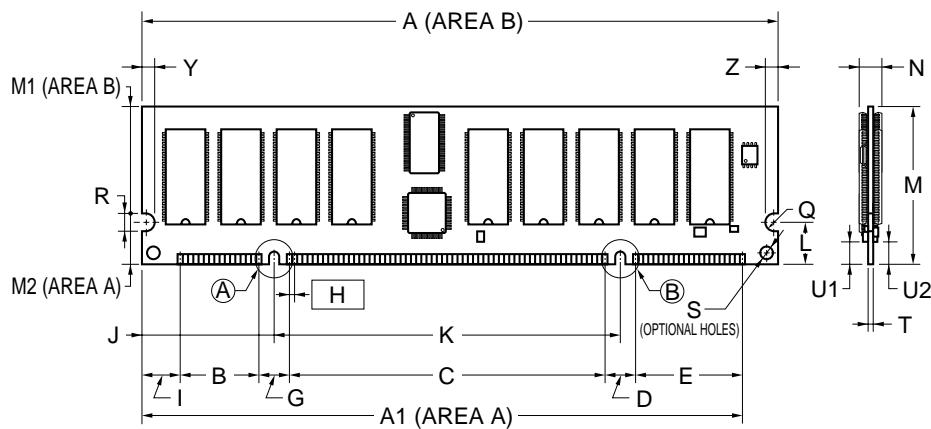

ITEM	MILLIMETERS	INCHES
A	153.7	6.051
A1	153.7 ± 0.13	6.051 +0.006 -0.005
B	19.05	0.750
C	77.47	3.050
D	6.35	0.250
D1	2.0	0.079
D2	3.125	0.123
E	26.67	1.050
G	6.35	0.250
H	1.27 (T.P.)	0.050 (T.P.)
I	8.905	0.351
J	31.135	1.226
K	83.82	3.300
L	10.0	0.394
M	38.1 ± 0.13	1.500 ± 0.006
M1	26.1	1.028
M2	12.0	0.472
N	4.0 MAX.	0.158 MAX.
P	1.0	0.039
Q	R2.0	R0.079
R	4.00 ± 0.10	0.157 +0.005 -0.004
S	Ø 3.0	Ø 0.118
T	1.27 ± 0.1	0.050 ± 0.004
U1	4.0 MIN.	0.157 MIN.
U2	4.0 MIN.	0.157 MIN.
V	0.25 MAX.	0.010 MAX.
W	1.0 ± 0.05	0.039 +0.003 -0.002
X	2.54 ± 0.10	0.100 ± 0.004
Y	3.0 MIN.	0.118 MIN.
Z	3.0 MIN.	0.118 MIN.

M200S-50A9

[MEMO]

[MEMO]

[MEMO]

NOTES FOR CMOS DEVICES

① PRECAUTION AGAINST ESD FOR SEMICONDUCTORS

Note: Strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it once, when it has occurred. Environmental control must be adequate. When it is dry, humidifier should be used. It is recommended to avoid using insulators that easily build static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work bench and floor should be grounded. The operator should be grounded using wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with semiconductor devices on it.

② HANDLING OF UNUSED INPUT PINS FOR CMOS

Note: No connection for CMOS device inputs can be cause of malfunction. If no connection is provided to the input pins, it is possible that an internal input level may be generated due to noise, etc., hence causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using a pull-up or pull-down circuitry. Each unused pin should be connected to V_{DD} or GND with a resistor, if it is considered to have a possibility of being an output pin. All handling related to the unused pins must be judged device by device and related specifications governing the devices.

③ STATUS BEFORE INITIALIZATION OF MOS DEVICES

Note: Power-on does not necessarily define initial status of MOS device. Production process of MOS does not define the initial operation status of the device. Immediately after the power source is turned ON, the devices with reset function have not yet been initialized. Hence, power-on does not guarantee out-pin levels, I/O settings or contents of registers. Device is not initialized until the reset signal is received. Reset operation must be executed immediately after power-on for devices having reset function.

[MEMO]

CAUTION FOR HANDLING MEMORY MODULES

When handling or inserting memory modules, be sure not to touch any components on the modules, such as the memory IC, chip capacitors and chip resistors. It is necessary to avoid undue mechanical stress on these components to prevent damaging them.

When re-packing memory modules, be sure the modules are NOT touching each other. Modules in contact with other modules may cause excessive mechanical stress, which may damage the modules.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.